



(43) International Publication Date
21 April 2016 (21.04.2016)

(51) International Patent Classification:

B25H 3/00 (2006.01) *F16B 2/20* (2006.01)
B25H 3/04 (2006.01)

(21) International Application Number:

PCT/SE2015/051084

(22) International Filing Date:

13 October 2015 (13.10.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1451245-3	17 October 2014 (17.10.2014)	SE
-----------	------------------------------	----

(71) Applicant: DELEX TEKNIK AB [SE/SE]; Forsnäs väg 11, SE-330 12 Forsheda (SE).

(72) **Inventor: FORSBERG, Erik**; Fänestad Kullagården, SE-330 12 Forsheda (SE).

(74) **Agent: ZACCO SWEDEN AB**; P.O. Box 5581, Valhallavägen 117N, S-114 85 Stockholm (SE).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SH, SI, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: HOLDER FOR OBJECTS

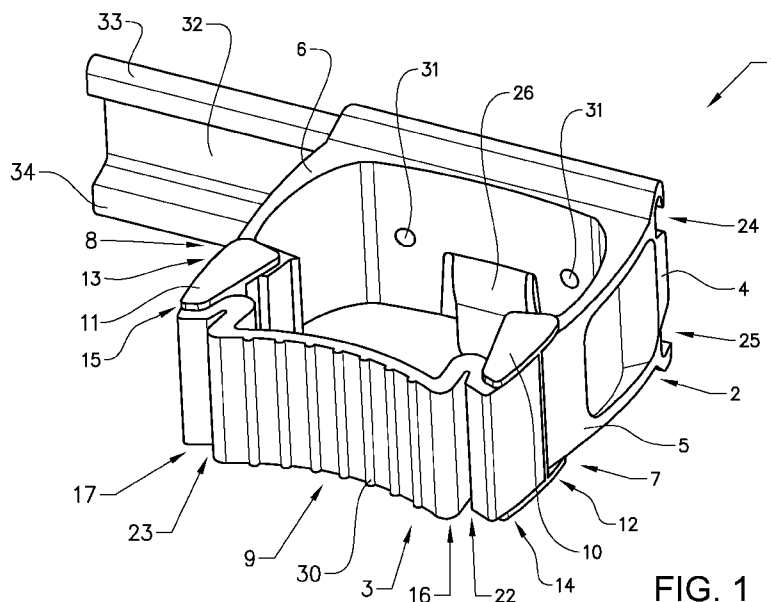


FIG. 1

(57) Abstract: A holder for objects, comprising a bracket and a holder element supported by the bracket, where the holder element comprises a resilient gripping section and two stiff pivoting arms, where the pivoting arms are pivotably suspended to the bracket, where the holder element comprises a receiving position and a holding position in which the object is held by the holder element, such that the gripping section is positioned within the bracket. The advantage of the holder is that objects of different sizes can be held in a secure way.