

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number
WO 2004/099510 A3

(51) International Patent Classification⁷: **E02F 9/28**

(74) Agent: **SCHAD, Steven, P.**; Banner & Witcoff, Ltd., 1001 G Street, N.W. Eleventh floor, Washington, DC 20001-4597 (US).

(21) International Application Number:
PCT/US2004/011265

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 29 April 2004 (29.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/425,606 30 April 2003 (30.04.2003) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): **ESCO CORPORATION** [US/US]; 2141 N.W. 25th Avenue, Portland, OR 97210 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **EMRICH, Robert, K.** [US/US]; 9200 S.W. 70th Avenue, Tigard, OR 97223 (US). **BRISCOE, Terry, L.** [US/US]; 11399 NW Ridge Road, Portland, OR 97229 (US).

Published:
— with international search report

[Continued on next page]

(54) Title: WEAR ASSEMBLY FOR THE DIGGING EDGE OF AN EXCAVATOR

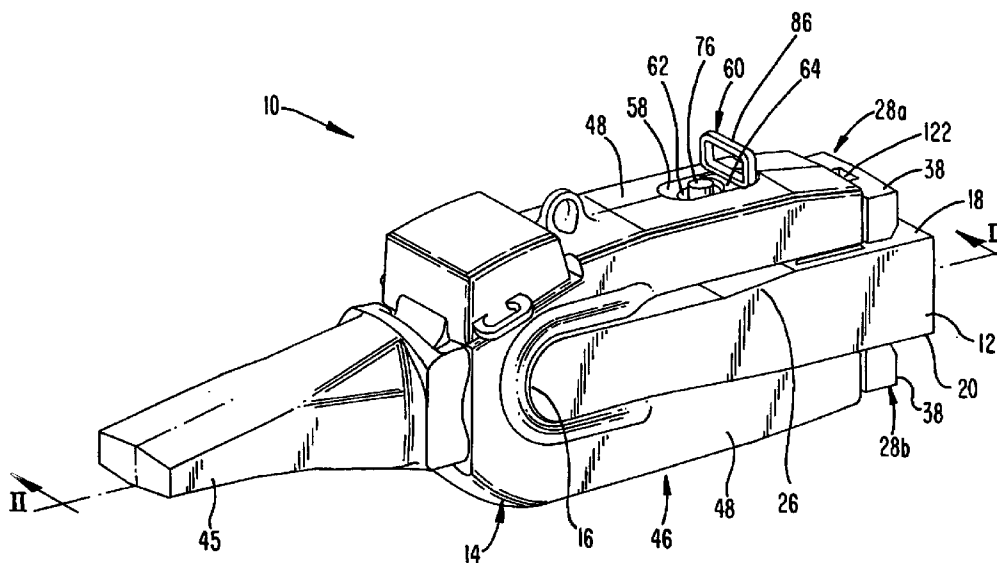

(57) Abstract: A wear assembly (10) for attaching wear members to a lip of an excavator includes a wear member, a boss (28) and a lock (60). The lip includes an inner face, an outer face, a digging edge and a series of through-holes spaced rearward of the digging edge. The bosses (28) are each fixed to a face of the lip at a position rearward of the through-holes. The wear members each include slots to receive the boss (28) adjacent their rear ends, and openings for receiving the locks (60) at a position forward of the bosses (28). The openings are aligned with the through-holes in the lip. The lock (60) includes a wedge (62) and spool arrangement (64).

WO 2004/099510 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

24 March 2005