

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
26 August 2021 (26.08.2021)



(10) International Publication Number
WO 2021/165691 A1

(51) International Patent Classification:
A61F 5/445 (2006.01)

(21) International Application Number:
PCT/GB2021/050409

(22) International Filing Date:
19 February 2021 (19.02.2021)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002380.0 20 February 2020 (20.02.2020) GB
2002388.3 20 February 2020 (20.02.2020) GB

(71) Applicant: **CONVATEC LIMITED** [GB/GB]; GDC,
First Avenue, Deeside, Flintshire CH5 2NU (GB).

(72) Inventors: **HOLROYD, Simon**; PDD Group Limited, 87 Richford Street, London Greater London W6 7HJ (GB). **BAKER, Dominic**; PDD Group Limited, 87 Richford Street, London Greater London W6 7HJ (GB). **TAAL, Stefan**; PDD Group Limited, 87 Richford Street, London Greater London W6 7HJ (GB). **PLEVNIK, Marko**; PDD Group Limited, 87 Richford Street, London Greater London W6 7HJ (GB).

(74) Agent: **WILSON GUNN (MANCHESTER)**; 5th Floor, Blackfriars House, The Parsonage, Manchester, Lancashire M3 2JA (GB).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,

(54) Title: AN OSTOMY APPLIANCE COUPLING ASSEMBLY

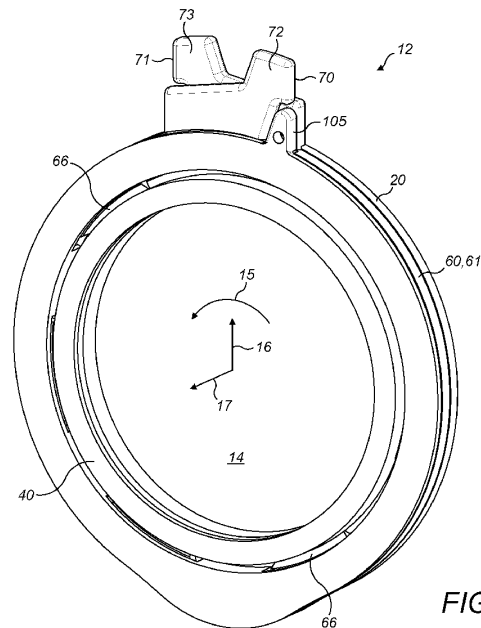


FIG. 2

(57) Abstract: The present disclosure provides a coupling assembly (12) for an ostomy appliance (10) comprising a locking arrangement (60), a first coupling and a second coupling. The locking arrangement (60) comprises a locking ring (61) and first and second grips (70, 71) mounted to the locking ring (61). The locking ring (61) is mounted to first and/or second coupling, forms an inner circumference (62) and is adjustable between locked and unlocked configurations. In the locked configuration the locking ring (61) is for maintaining the first and second couplings (20, 40) in a coupled configuration and the inner circumference (62) is less than in the unlocked configuration. The first and second grips (70, 71) are positioned about the locking ring (61) to be moveable towards one another to increase the inner circumference (62) and adjust the locking ring (61) from the locked configuration to the unlocked configuration.

[Continued on next page]

WO 2021/165691 A1

KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*