



- (51) International Patent Classification:
B26B 21/44 (2006.01)
- (21) International Application Number:
PCT/US2012/068338
- (22) International Filing Date:
7 December 2012 (07.12.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/568,877 9 December 2011 (09.12.2011) US
- (71) Applicant: **THE GILLETTE COMPANY** [US/US];
World Shaving Headquarters, IP/Legal Patent Department
- 3E, One Gillette Park, Boston, Massachusetts 02127
(US).
- (72) Inventor: **WAIN, Kevin, James**; 5 Dartington Avenue,
Woodley, Reading Berkshire RG5 3PD (GB).
- (74) Agent: **GUFFEY, Timothy B.**; c/o The Procter & Gamble
Company, Global Patent Services, 299 East 6th Street, Sy-
camore Building, 4th Floor, Cincinnati, Ohio 45202 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLUID APPLICATOR FOR A PERSONAL-CARE APPLIANCE

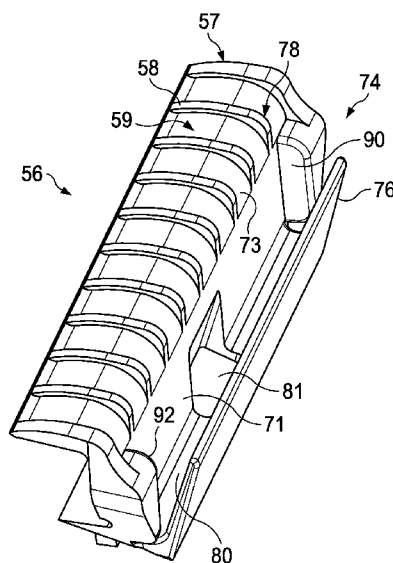


FIG. 2

(57) Abstract: A fluid dispensing cartridge for a personal care appliance with a fluid applicator having a baffle with a rear wall and an opposing resilient front flap. The baffle defines at least one outlet port. The resilient front flap contacts a portion of the rear wall in a first position and is spaced apart from the portion in a second position.