

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 December 2001 (06.12.2001)

PCT

(10) International Publication Number
WO 01/92097 A1

(51) International Patent Classification⁷: **B63B 25/12**

(21) International Application Number: PCT/IL01/00491

(22) International Filing Date: 29 May 2001 (29.05.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/208,388 30 May 2000 (30.05.2000) US

(71) Applicant (for all designated States except US): **INBAR - WATER DISTRIBUTION COMPANY LTD.** [IL/IL]; 1 Litanis Street, 34337 Haifa (IL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **YAFFE, Aaharon** [IL/IL]; 20115 Moshav Amirim (IL).

(74) Agents: **COLB, Sanford, T.** et al.; Sanford T. Colb & CO., P.O. Box 2273, 76122 Rehovot (IL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FLEXIBLE VESSEL

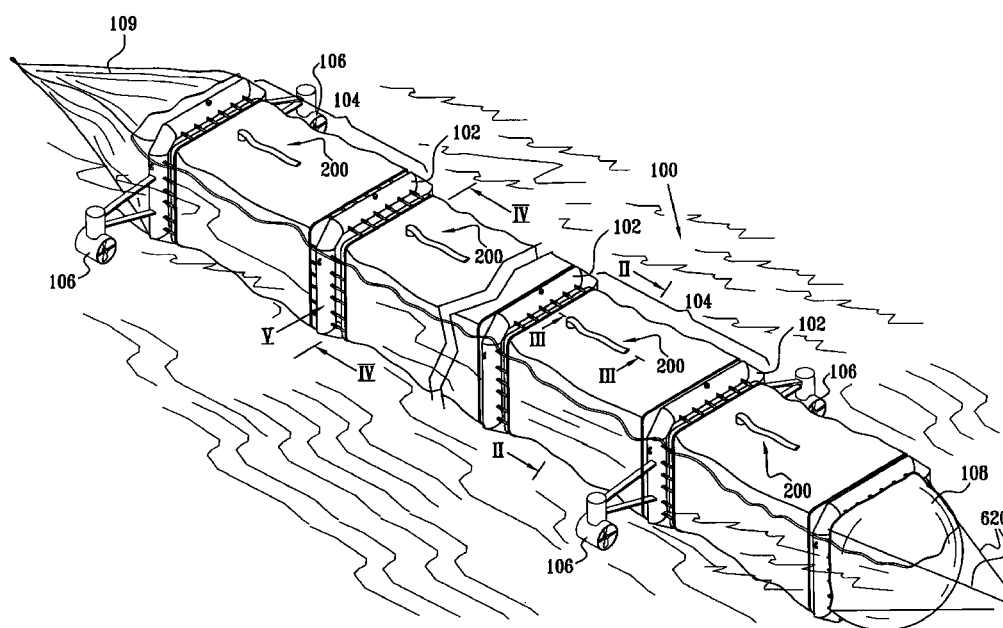

(57) **Abstract:** Apparatus and a method for sea transport of liquids is disclosed including a first enclosure (110) and an at least partially flexible second enclosure (112) disposed within the first enclosure and being adapted, when filled, to generally fill the first enclosure. One of the first and second enclosures being a light liquid enclosure, and the other of the first and second enclosures is a sea water enclosure. A light liquid port (504) is coupled to the light liquid enclosure (110) for selectably filling it with a liquid lighter than sea water (154), and a sea water port is coupled to the sea water enclosure for selectably allowing sea water (156) to fill it, thereby causing light liquid to be expelled against the force of gravity from the light liquid enclosure.



WO 01/92097 A1