Drawings

Figure 1

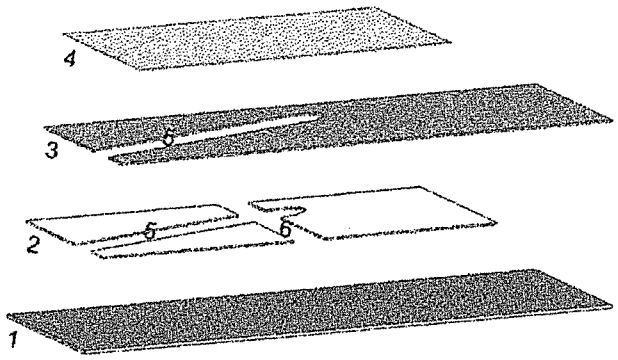

Figure 2

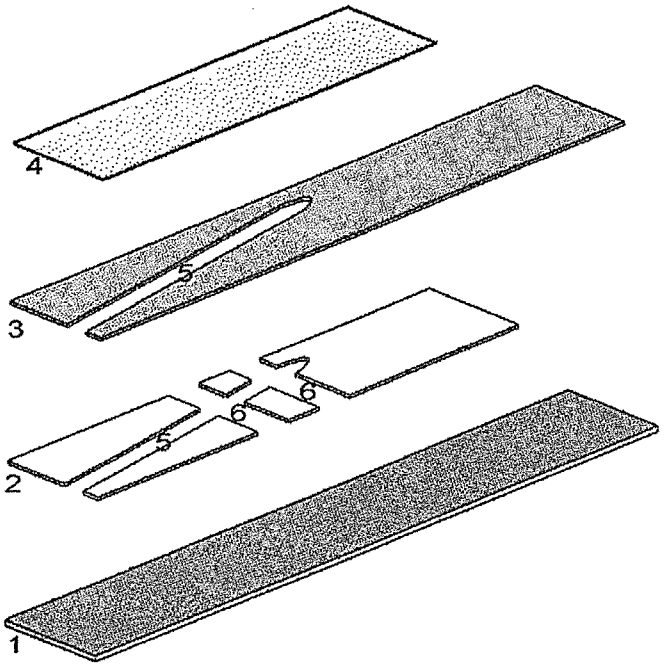

Figure 3

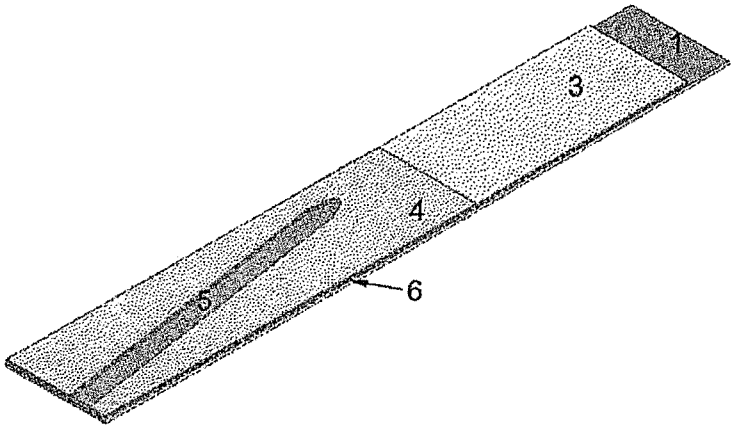

Figure 4

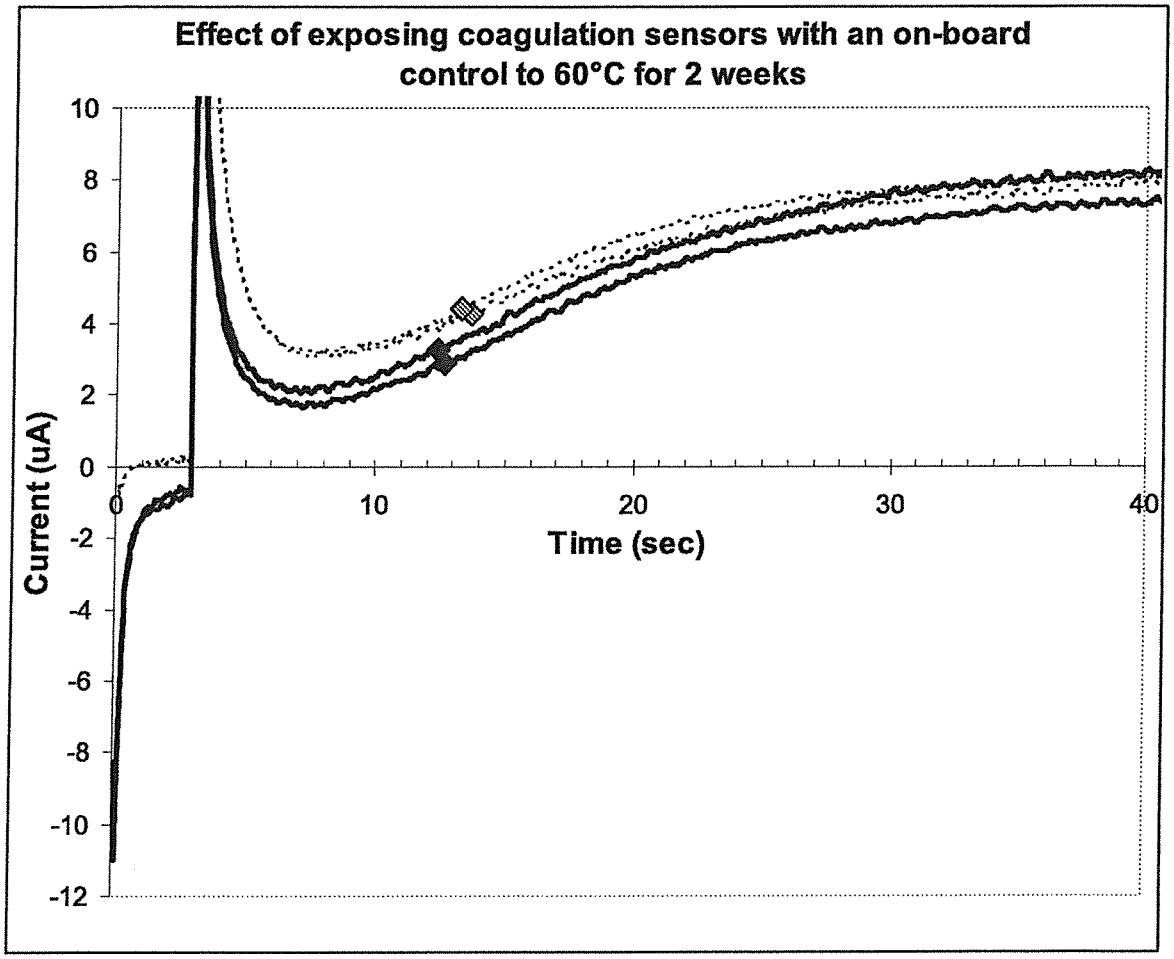
Effect of exposing coagulation sensors with an on-board control to 60°C for 2 weeks
Current (uA)
Time (sec)
10
8
6
4
2
0
-2
-4
-6
-8
-10
-12
0
10
20
30
40