

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
10 May 2001 (10.05.2001)

PCT

(10) International Publication Number
WO 01/33161 A1

(51) International Patent Classification⁷: G01B 5/004

(21) International Application Number: PCT/NL00/00796

(22) International Filing Date:
2 November 2000 (02.11.2000)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1013479 3 November 1999 (03.11.1999) NL

(71) Applicant: BLOKS, Theodorus Wilhelmus Antonius
Cornelis [NL/NL]; Genoehuis 8, NL-5661 PC Geldrop
(NL).

(71) Applicant and

(72) Inventor: JANSSEN, Antonius, Johannes [NL/NL];
Beerze 20, NL-5711 KB Someren (NL).

(74) Agents: VAN KAN, J., J., H. et al.; Algemeen Oc-
trooibureau, World Trade Center, Pastoor Petersstraat 160,
NL-5612 LV Eindhoven (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility
model), DK, DK (utility model), DM, DZ, EE, EE (utility
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK
(utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- With international search report.
- Before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments.

[Continued on next page]

(54) Title: A MEASURING DEVICE COMPRISING A MOVABLE MEASURING PROBE

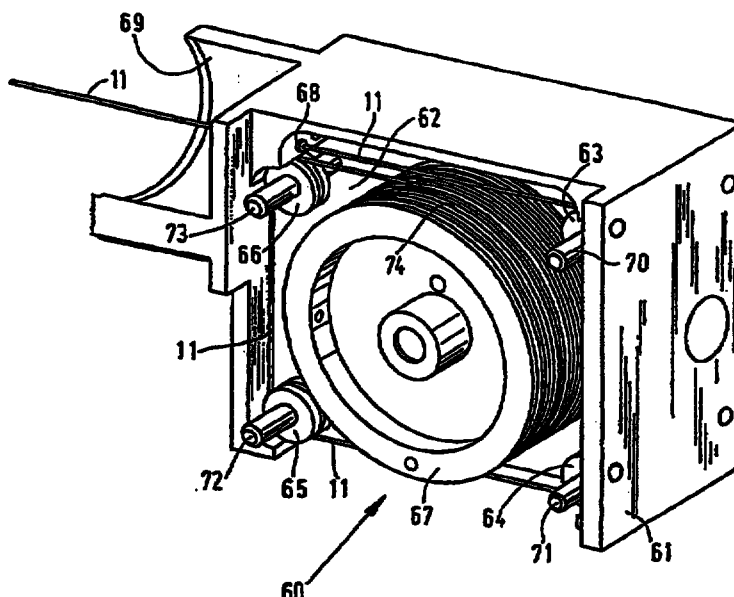

(57) Abstract: The invention relates to a measuring device (1) comprising a movable measuring probe (3) and sensors (8, 14) coupled to the measuring probe (3) for providing position data of the measuring probe (3). The measuring probe (3) is coupled, via a cord or a wire (11), to a first sensor (14) for measuring the length or change in length of the cord or the wire (11), and to a second sensor (8) for measuring an angle or angular displacement of the cord or the wire (11). The obtained position data can be graphically represented and/or be used for driving automatic machining apparatus for producing a product corresponding to the measured data.

WO 01/33161 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.