

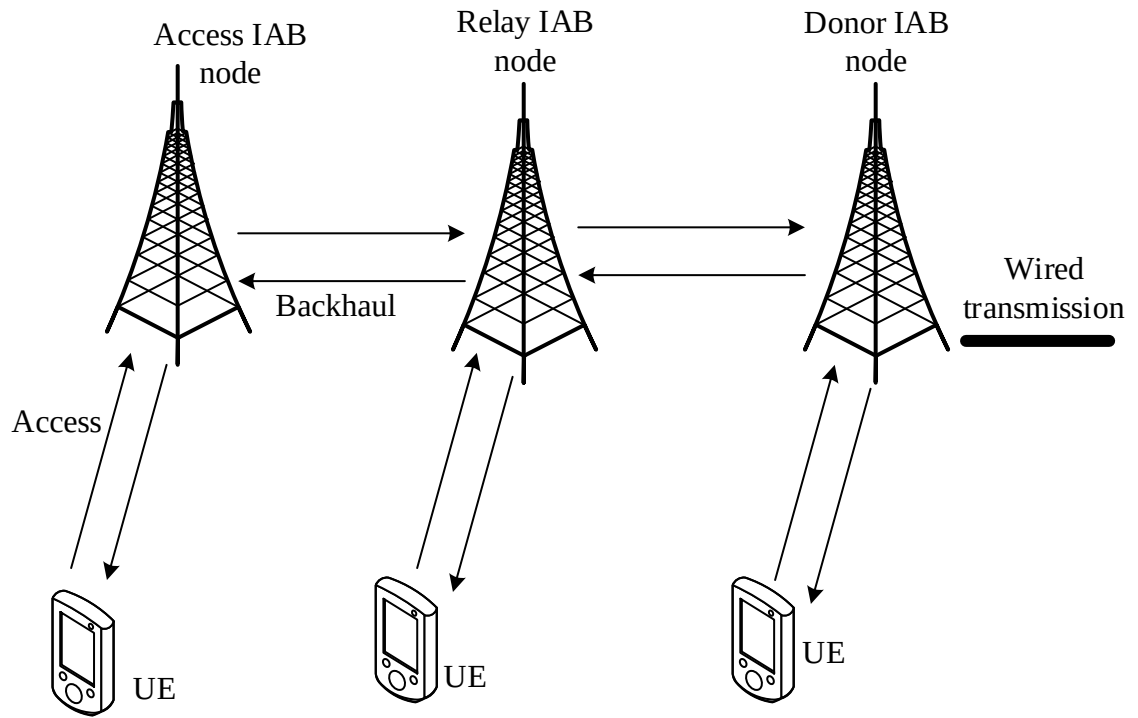


FIG. 1

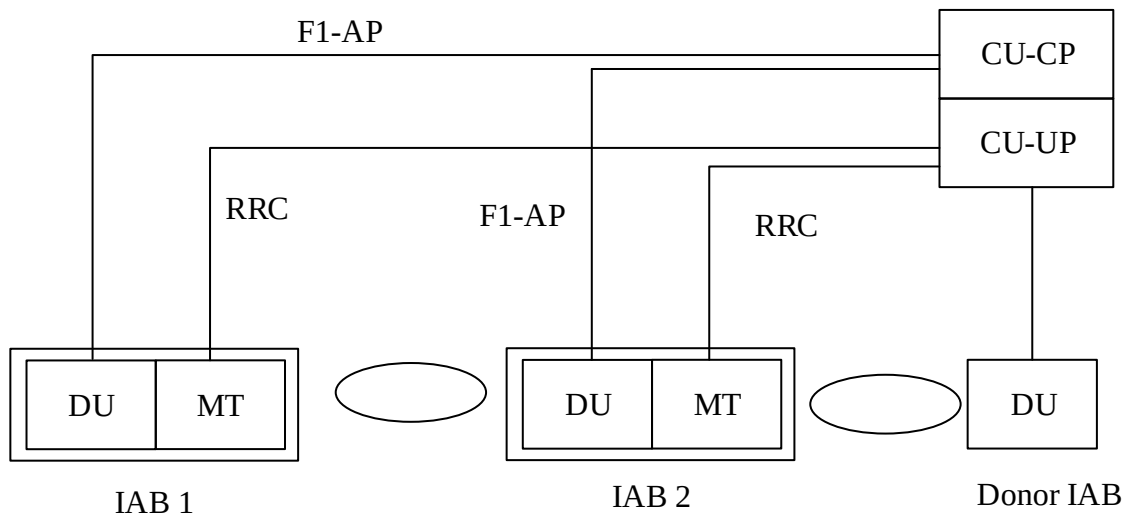


FIG. 2

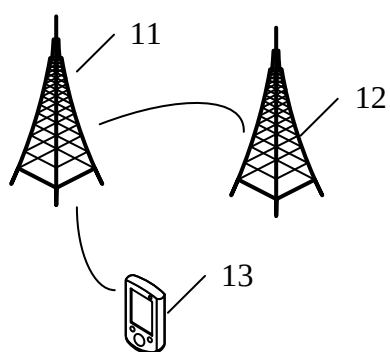


FIG. 3

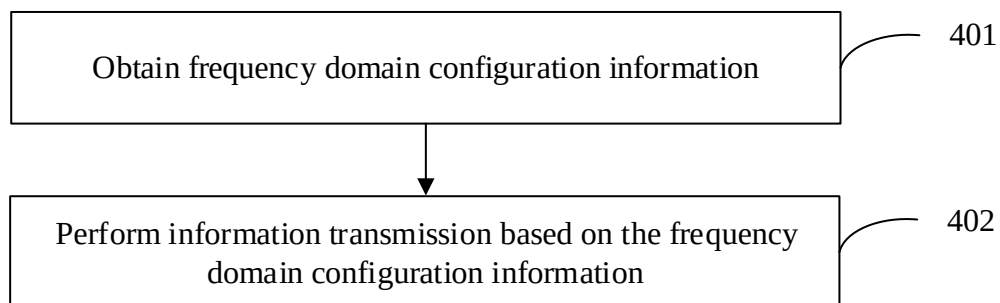


FIG. 4

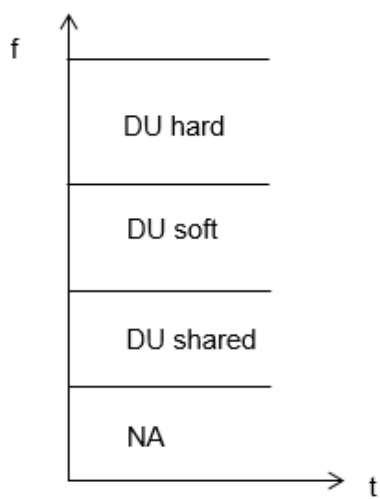


FIG. 5

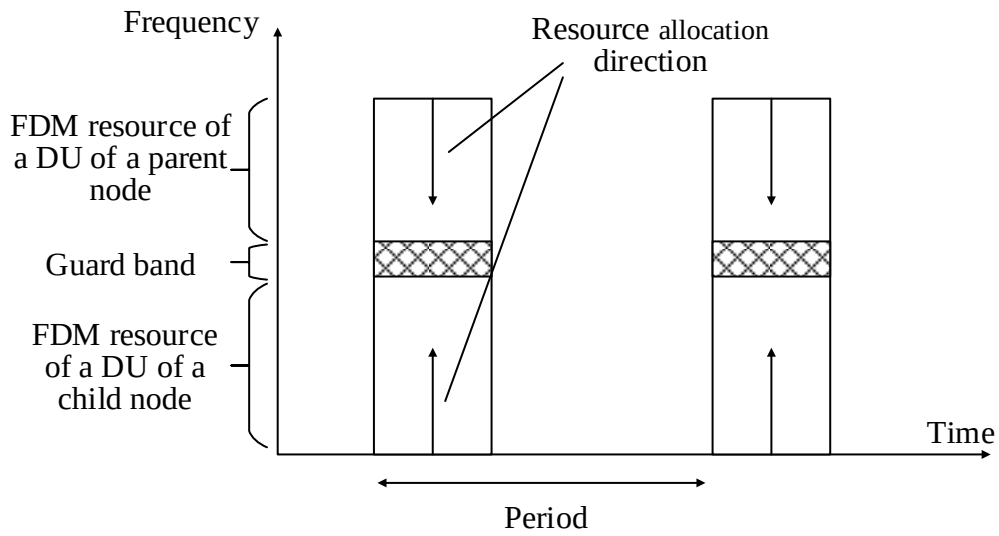


FIG. 6

Send frequency domain configuration information to an integrated access backhaul IAB node

701

FIG. 7

Receive configuration information of a guard band from a DU of an IAB node; or in a case that a guard band is configured in a DU of an IAB node, if an overlap exists between a frequency domain resource scheduled by the DU for a fourth device and the guard band, perform rate matching or puncturing on the overlap

801

FIG. 8

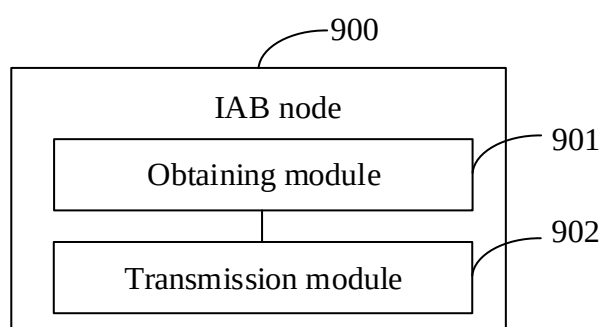


FIG. 9

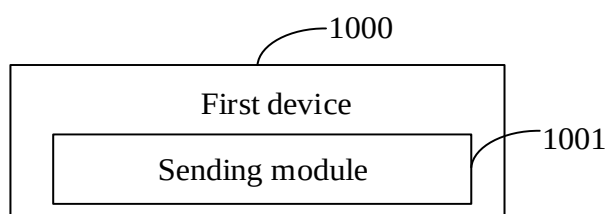


FIG.10

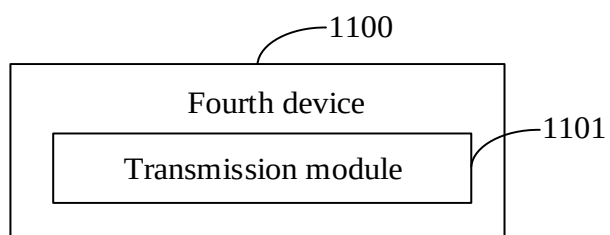


FIG.11

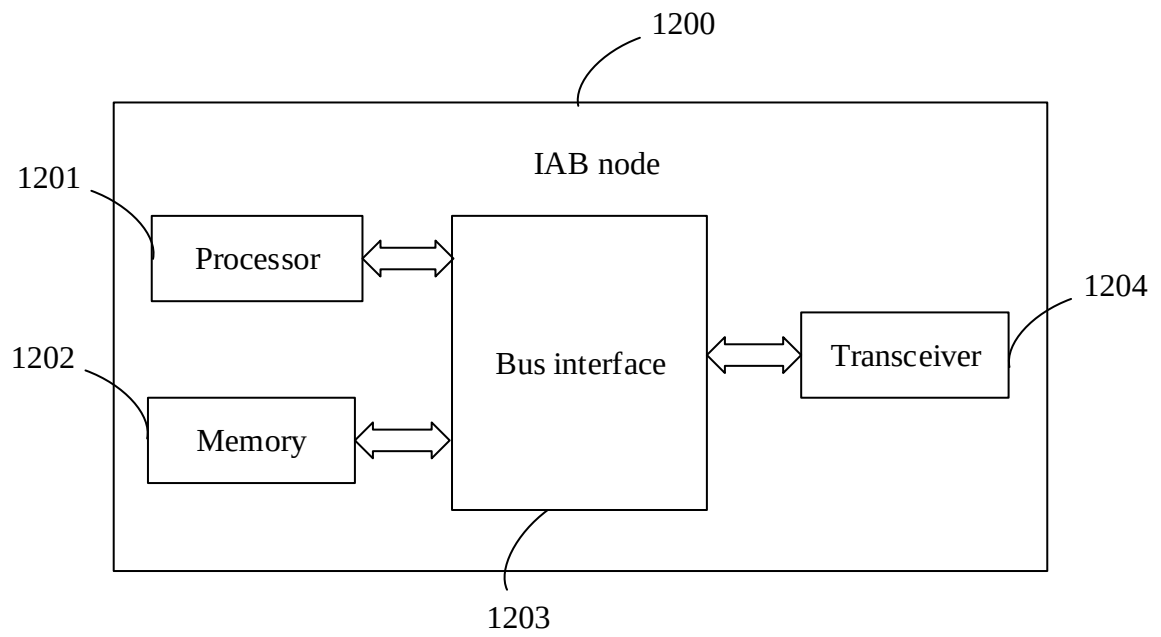


FIG.12

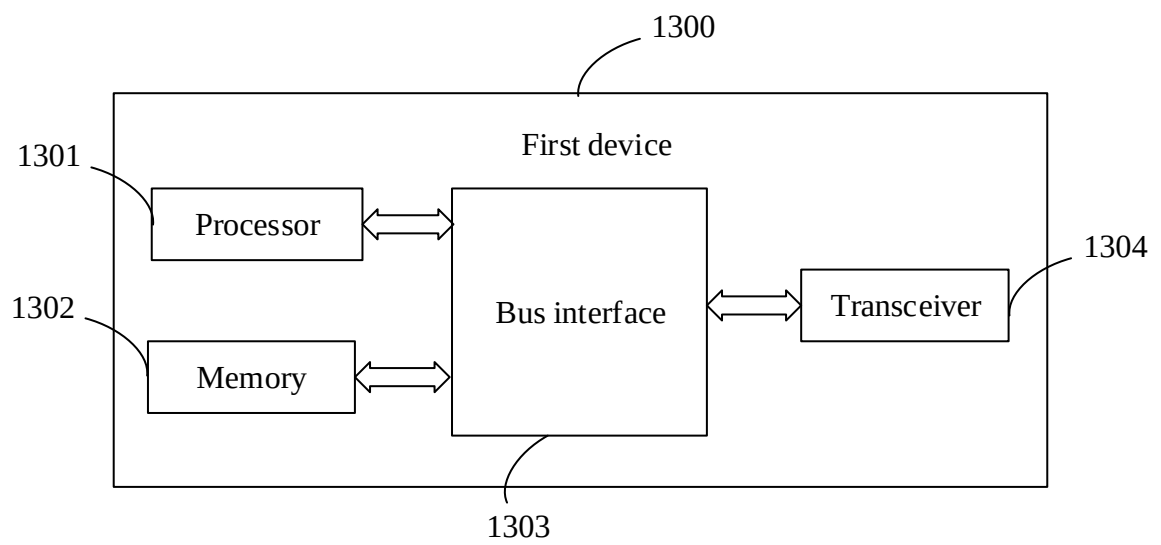


FIG.13

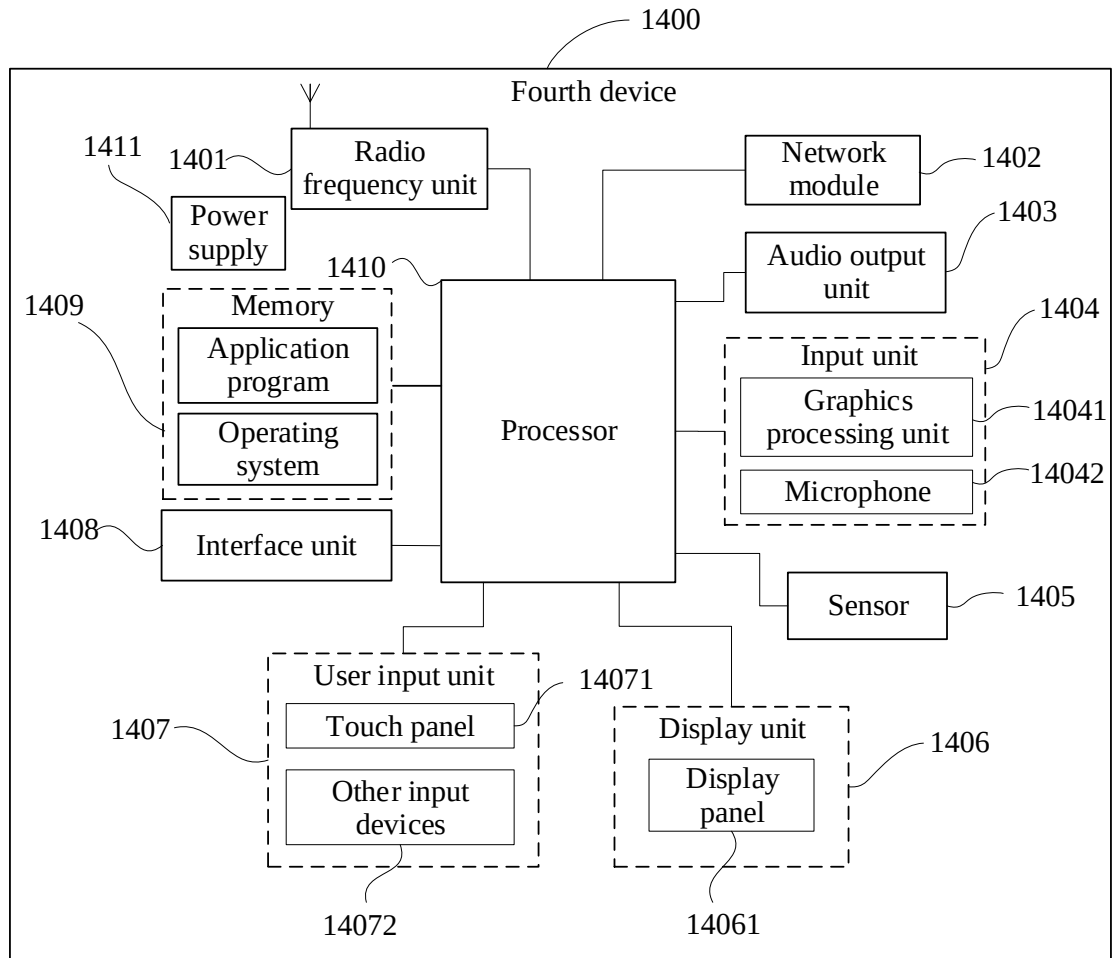


FIG.14