



(51) International Patent Classification:
E05B 63/08 (2006.01)

(21) International Application Number:
PCT/AU2011/000780

(22) International Filing Date:
24 June 2011 (24.06.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2010902794 24 June 2010 (24.06.2010) AU

(71) Applicant (for all designated States except US): **ASSA ABLOY AUSTRALIA PTY LIMITED** [AU/AU]; 235 Huntingdale Road, Oakleigh, Victoria 3166 (AU).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **NEWMAN, Donald, John** [AU/AU]; 18 Tyalla Court, Hampton Park, Victoria 3976 (AU).

(74) Agent: **PHILLIPS ORMONDE FITZPATRICK**; Level 21, 22 & 23, 367 Collins Street, Melbourne, VIC 3000 (AU).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MORTICE LOCK ACTUATOR

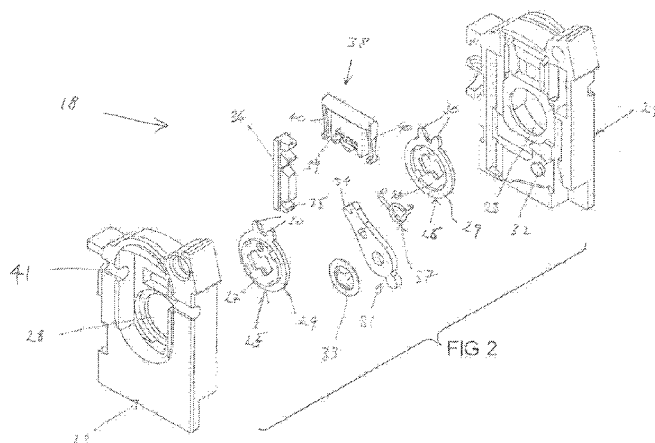

(57) Abstract: This invention relates to an actuator assembly (18) for use with a mortice lock assembly (1). The actuator assembly (18) including a housing (23,24) with an inner cam (25) and an outer cam (26) housed for rotation within the housing (23,24). Each cam (25,26) is selectively operable to adopt a latching mode or a locking mode.