



- (51) **International Patent Classification:**
H04L 5/00 (2006.01) *H04B 7/0408* (2017.01)
- (21) **International Application Number:**
PCT/US2019/054984
- (22) **International Filing Date:**
07 October 2019 (07.10.2019)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/742,918 08 October 2018 (08.10.2018) US
16/593,828 04 October 2019 (04.10.2019) US
- (71) **Applicant: QUALCOMM INCORPORATED** [US/US];
Attn: International IP Administration, 5775 Morehouse Drive,
San Diego, California 92121-1714 (US).
- (72) **Inventors: SUN, Jing;** 5775 Morehouse Drive, San Diego,
California 92121-1714 (US). **ZHANG, Xiaoxia;** 5775

Morehouse Drive, San Diego, California 92121-1714 (US).
LUO, Tao; 5775 Morehouse Drive, San Diego, California
92121-1714 (US). **JOHN WILSON, Makesh Pravin;**
5775 Morehouse Drive, San Diego, California 92121-1714
(US).

(74) **Agent: TONKINSON, Michael S.;** Holland & Hart LLP,
P.O. Box 11583, Salt Lake City, Utah 84147 (US).

(81) **Designated States** (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) **Title: SEMI-STATIC TRANSMISSION CONFIGURATION INDICATOR CONFIGURATION**

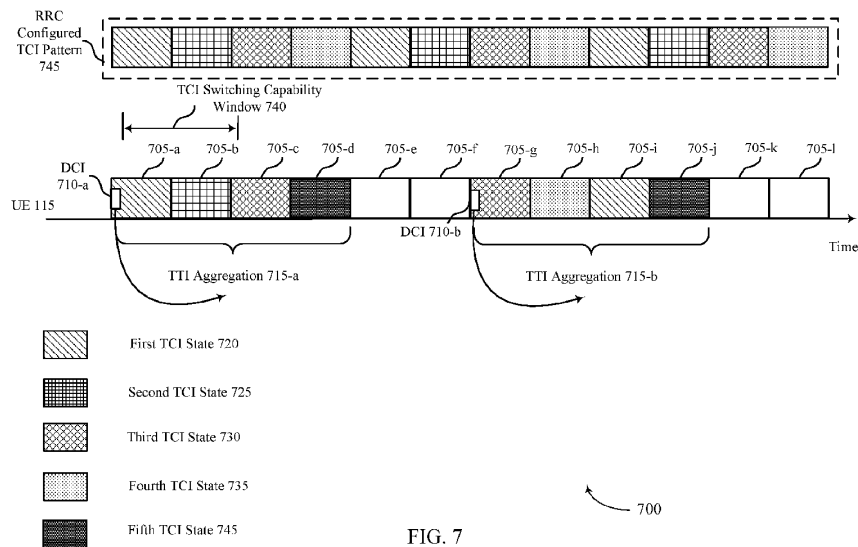


FIG. 7

(57) **Abstract:** Methods, systems, and devices for wireless communications are described. A base station may transmit a configuration indicating a transmission configuration indicator (TCI) state switching pattern and a TCI state switching period to a user equipment (UE). The UE may perform TCI state switching according to the TCI state switching pattern and period, and the UE may receive a downlink transmission according to the TCI state switching pattern. The UE may receive a downlink control information (DCI) including an indication of a TCI state for a subsequent TTI. The UE may receive the downlink signal in accordance with both the TCI state switching pattern and the indication in the DCI. The UE may receive a configuration message indicating a first DCI state, receive a DCI indicating a second TCI state for a subsequent TTI, switch to the second TCI state, and receive a downlink signal using the second TCI state.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))