



SG 9701164-7

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

G11B 5/84

A2

(11) International Publication Number:

WO 96/09622

(43) International Publication Date:

28 March 1996 (28.03.96)

(21) International Application Number: PCT/US95/12399

(22) International Filing Date: 21 September 1995 (21.09.95)

(30) Priority Data:

08/311,529

23 September 1994 (23.09.94)

US

(71) Applicant: CONNER PERIPHERALS, INC. [US/US]; 3081 Zanker Road, San Jose, CA 95134 (US).

(72) Inventors: KIM, Taesun, E.; 1075 Maxey Drive, San Jose, CA 95132 (US). LEE, Hyung, J.; 11658 Olive Spring Court, Cupertino, CA 95014 (US). SHIH, Yao-Tzung, R.; 10393 Tula Lane, Cupertino, CA 95014 (US). BRUNO, John, C.; 606 Amador Court, Martinez, CA 94553 (US). ZUBECK, Robert, B.; 1102 Lisa Lane, Los Altos, CA 94024 (US). HOLLARS, Dennis, R.; 23550 Skyview Terrace, Los Gatos, CA (US).


(74) Agents: HELLER, Paul et al.; Kenyon & Kenyon, One Broadway, New York, NY 10004 (US).

(81) Designated States: CA, CN, JP, KR, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: APPARATUS AND METHOD FOR SPUTTERING CARBON

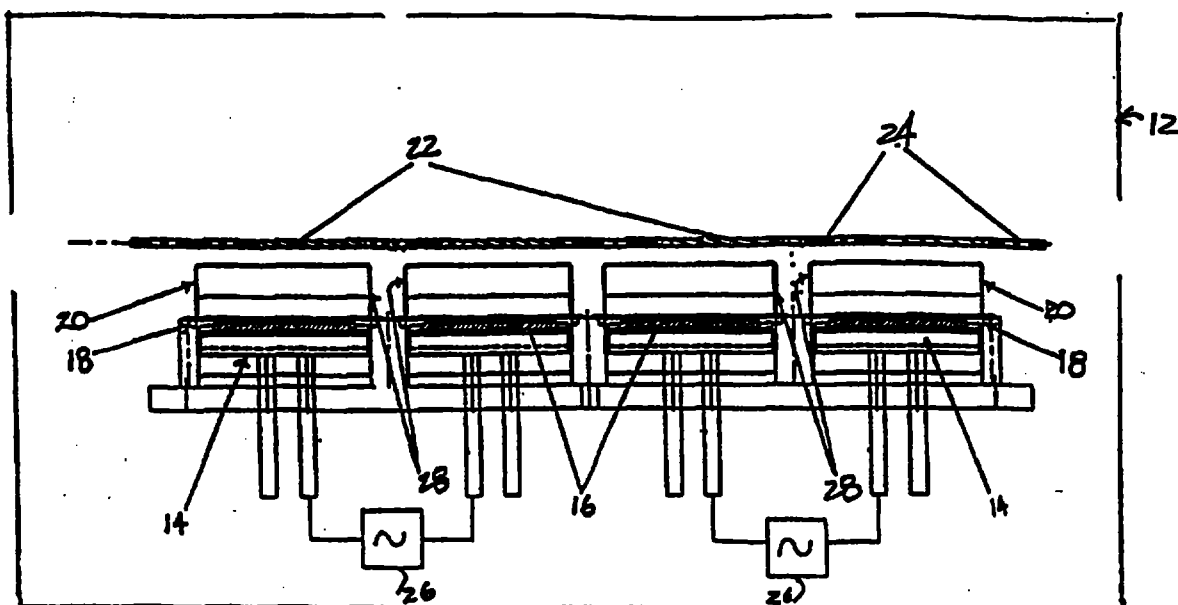

(57) Abstract

A hydrogenated carbon film for magnetic thin film recording media is manufactured by alternating current magnetron sputtering in an atmosphere containing argon and a hydrocarbon gas. Targets mounted side-by-side cyclically sputter and discharge charge buildup according to an alternating current. Shielding between the targets directs electrons toward the anode at a given time.



166166

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

9701164-7

APPARATUS AND METHOD FOR SPUTTERING CARBON

REPLACED SHEETS		SG
☒	Description : paged 6 to paged - -	
☒	Claim(s) : paged 15 to paged 17 -	
☐	Drawing(s) : paged - to paged - -	
☐	Abstract : paged - to paged - -	

BACKGROUND OF THE INVENTIONField of the Invention

This invention relates to an apparatus and method for the manufacture of a magnetic recording disk and, in particular, to an apparatus and method for the manufacture of a disk having a protective overcoat of a hydrogenated carbon film.

Description of the Related Art

Dielectric films such as Al_2O_3 , Si_3N_4 , SiO_2 and carbon, have a variety of technical applications. These applications include the use of these films as protective coatings such as for magnetic heads, interlayers for integrated circuits and overlayers for magneto-optical media. In view of the widespread use of these films in high technology applications and the need for precise control of film properties for such applications, film manufacturing processes embodying rapid, high yield, and easy-to-control production methods with high yields are very desirable.

Sputtering techniques have been used to deposit these films. For example, United States Patent No. 4,737,419 relates to a direct current magnetron sputtering process for depositing a carbon overcoat suitable for use over a magnetic recording layer

comprising magnetic particles in an organic binder. While direct current (dc) magnetron sputtering of dielectric materials generally is capable of depositing films at economically attractive rates, redeposition of non-electrically conducting dielectric materials onto the sputtering target can cause arcing. Arcing is undesirable since it can disturb sputtering, generate particulate contaminants and cause the target to break down.

Replacement of dc power with alternating current (ac) power supplies is known to reduce or eliminate arcing because of relatively shorter-lived charge buildup on the dielectric target. For example, Leybold's Electronics Newsletter of January 1994, No. 5, pages 14-17, describes a mid-frequency reactive sputtering process for the deposition of Si_3N_4 onto a static substrate. Also, Scherer, et al., in an article entitled "Reactive Alternating Current Magnetron Sputtering of Dielectric Layers", *J. Vac. Sci. Technol. A* 10(4), Jul./Aug. 1992, pages 1772-1776, teach alternating current reactive magnetron sputtering of Al_2O_3 , Si_3N_4 and $\text{Si}_{45}\text{O}_{27}\text{N}_{28}$. In each of these publications, magnetrons were positioned side-by-side and coupled with a mid-frequency 10 kW power supply working at 40kHz. Power was split between the magnetrons so that each magnetron acted for one-half of the cycle as a cathode and for the other half of the cycle as a dc-conducting anode to discharge charge buildup, thereby reducing the probability of arcing while maintaining continuous sputtering.

Alternating current magnetron sputtering processes have been used to deposit carbon films. For example, United States Patent No. 4,778,582 relates to carbon films sputtered over a magnetic thin film recording layer. A 200Å carbon film was formed on a grounded

- 3 -

substrate in an atmosphere of argon and hydrogen using a single graphite target supplied with 250 W from an RF power source. While the use of such a high frequency power source in alternating current magnetron sputtering tends to reduce the lifetime of charge buildup due to the high number of cycles per second and therefore the potential for arcing, such power sources are relatively expensive. Also, extensive shielding of the sputtering apparatus from high frequency noise generated by the power supply is required to minimize disturbances of sputtering processes thereby.

It is sometimes desired that only sputtering flux with a particular orientation is deposited onto the substrate. For example, in the deposition of films serving as magnetic thin film recording layers, obliquely incident sputtering flux can cause significant nonuniformities in the deposited film's morphology or thickness or both. Variations in these characteristics of the film can cause variations in film performance and therefore are undesirable. One approach to this problem is to fit sputtering chambers with shields having surfaces intervening in the space between the magnetrons and the surface of the substrate to be coated. These shield surfaces intercept the obliquely incident sputtering flux so that only sputtering flux having a particular angle of incidence relative to the substrate is deposited on the substrate. Thus, film morphology can be controlled.

When used, these shields are positioned to surround each magnetron or to extend from the magnetron to a position between the sputtering target and the substrate. For planar magnetrons, for example, shields typically are panels arranged to form a rectangular structure that circumferentially frames each magnetron and have an opening facing the substrate

surface. Flanges of various configurations can extend from each shield toward the substrate surface to increase the amount of flux intercepted.

5 A drawback to the use of conventional shields in sputtering apparatuses is that the ultimate rate of film deposition onto the substrate may be reduced to an unacceptably low level from an economic perspective. While it may be possible to adjust sputtering process parameters to counteract the reduction, adjustment fo
10 these parameters will affect the nature of the film deposited, possibly to the extent that the film is unusable for the original purpose desired.

Carbon films have also been formed by plasma decomposition of hydrocarbon gases or reactive
15 sputtering from a graphite target in the presence of argon and hydrogen or various hydrocarbon gases. With such reactive processes, it is difficult to consistently produce films with desired properties because of difficulties in control of chemical
20 dissociation of reactant species and the site of reaction between the surface upon which deposition is desired and the gaseous environment. Other drawbacks include production of an insulating film on the target inhibiting additional sputtering therefrom, deposition
25 of contaminants onto the substrate or composition or morphology nonuniformities.

Also, the abstract of Japanese Kokai 60-157725 describes the sputtering of a polymerized hydrocarbon film in an atmosphere containing a gaseous hydrocarbon.
30 Generally, such polymerized films are insufficiently hard to satisfy current specifications for protective overcoats for magnetic thin film recording media.

SUMMARY OF THE INVENTION

The present invention addresses these and other disadvantages in the prior art.

Thus, it is an object of the present invention to
5 provide an easy to control and efficient apparatus and method for sputtering films of dielectric materials such as carbon.

Another object of the present invention is to enhance the deposition rate of a dielectric film
10 produced by alternating current magnetron sputtering.

It is a further object of the present invention to reduce the probability of arcing when sputtering a dielectric material.

An additional object of the present invention is
15 to facilitate tailoring of the properties of the sputtered film.

These and other objects are achieved through an apparatus and a method according to the present invention in which adjacent magnetrons successively act
20 as a sputtering cathode and then as an anode in accordance with the frequency of an alternating current power supply and in which electrons in the plasma are kept close to the sputtering target by direction of the electrons to the anode via an apertured baffle between
25 the magnetrons.

An apparatus according to the present invention includes a pair of magnetrons having targets and disposed within a sputtering chamber, the targets positioned adjacent to each other and acting as a
30 common sputtering area for the deposition of a film; an alternating current power supply connected to the magnetrons so that each target in the pair alternately functions as a sputtering cathode and then as an anode according to the frequency of the alternating current;
35 and a shielding means between the magnetrons, the

shielding means having apertures positioned to direct electrons to the anode as the targets alternate as the sputtering cathode and as the anode.

5 A method according to the present invention includes providing carbon-containing targets positioned side by side in an evacuated environment; flowing a gas into the evacuated environment to a pressure capable of sustaining sputtering; cyclically sputtering from the targets to form a carbon film on a medium; and
10 providing apertures between the targets to enhance the movement of electrons between the targets during sputtering.

BRIEF DESCRIPTION OF THE DRAWINGS

15 The invention will be better understood by reference to the figures of the drawings wherein like numbers denote like parts throughout and wherein:

Figure 1A is a cross-sectional plan view of a sputtering apparatus according to the present
20 invention;

Figure 1B is a side view of an apertured shield for an apparatus according to the present invention;

Figure 2 is a graph of the variation in Raman G Band Peak for carbon films as a function of gas flow
25 rate and pressure;

Figure 3 is a graph of the variation of carbon film thickness as a function of gas flow rate and pressure; and

Figure 4 illustrates the effect of temperature on
30 CSS performance for magnetic recording disks.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Dielectric films may be deposited using a sputtering apparatus according to the present
35 apparatus, as exemplified in Figures 1A and 1B.

THIS SHEET HAS BEEN
REPLACED

Generally, such an apparatus 10 includes conventional elements utilized in magnetron sputtering, e.g., a sputtering chamber 12, one or more pairs of magnetrons 14 with targets 16 composed of the material to be deposited and located along the sides of the chamber, gas distribution lines 18 to introduce the sputtering gas and optionally, though preferred, shields 20 to intercept low angle sputtering flux prior to deposition onto substrates 22 in a carrier 24 as described in the *Handbook of Thin Film Deposition Processes and Techniques*, edited by Klaus Schuegraf, Noyes Publications, 1988, pages 291-317. Additional magnetrons, shields and gas distribution lines, not shown in Figure 1A, can also be positioned within the sputtering chamber to deposit film on each side of the substrates.

In an apparatus according to the present invention, the magnetrons are adjacent, i.e., side by side, each other on the side of the chamber and each pair is coupled to an alternating current power supply 26. Because of the cyclic nature of the current being supplied to the magnetron pair, each target in the pair sputters for one-half of the cycle, i.e., the magnetron acts as the cathode, while for the other half of the cycle, the magnetron acts as an anode, discharging any charge buildup. Alternating current power desirably has a high enough frequency so that the periods during which charge buildup occurs is very short to reduce the probability of arcing, but not so high as to require the extensive shielding needed with radio and other high frequency power supplies. A suitable power supply is a 10 kW mid-frequency power supply model PE 10K manufactured by Advanced Energy Company of Fort Collins, Co. Shielding of the sputtering chamber from this power supply is unnecessary.

In addition to shields to intercept low angle flux, a sputtering apparatus according to the present invention has an apertured shield 28 with a plurality of openings 30 as shown in Figure 1B. The apertured shield may be mounted, for example, by brackets 32, to a door 34 to the sputtering chamber and is positioned between coupled targets and oriented in the same plane as the targets. The openings are transverse to the vertical axis of the apertured shield, thereby providing through channels between the magnetrons to direct electrons to the appropriate target in the pair acting as the anode at a given time during the cycle.

The dimensions of the shield and the number of apertures therethrough depend upon the dimensions of the magnetrons used and the extent of shielding desired. In an apertured shield having dimensions 12.8 cm x 5.0 cm x 86.5 cm (length by width by height), it is useful to have seven openings 1.9 cm x 9.6 cm along the length of the shield so that transverse paths are provided for electron travel between targets. The apertured shield may be constructed of a material such as stainless steel.

Deposition may be onto a static substrate or a substrate being transported past the magnetrons.

Properties of sputtered films are affected by process parameters such as gas flow rate and sputtering pressure. The effect of changes to these process parameters on the properties of carbon films is summarized in Table 1. The carbon films in Table 1 were deposited on 95 mm nickel-plated aluminum disks on which 1100Å Cr and 520Å CoCrTa films were previously deposited at 190°C.

Table 1

	Sputtering Pressure, <u>mTorr</u>	Gas Flow, <u>sccm/target</u>	Carbon Thickness, <u>Å</u>	<u>H%</u> *	G Peak, <u>cm⁻¹</u>	Overall Avg. <u>Stiction, g</u>	CSS** Overall Avg. Peak <u>Stiction, g</u>
5	8	30	252	15.6	1555	9.1	15.6
			252	12.4	1559		
			242	17.4	1558		
	8	42	292	27.9	1566	10.9	15.7
10			277	26.9	1568		
			369	39.3			
	12	30	245	19.5	1558	11.8	16.0
			236	21.4	1559		
			270	21.4	1557		
15	12	42	307	35.8	1571	9.5	15.4
			257	29.8	1571		
			273	34.2	1570		
	10	36	268	28.2	1562	9.8	16.1
			258	22.4	1562		
20			289	27.7	1562		

* Determined by optical properties correlated to v%_H.

** CSS performance over 10,000 cycles with 70% MIG head, 2¼ microinch flying height, 4.75 gram load average, average ambient temperature 69°F, 28% average relative humidity.

Wear performance appears to be correlated to Raman G Band Peak position. Polycrystalline graphite has bands at about 1357 cm^{-1} and 1580 cm^{-1} (the "G Band"). Data suggests that films having G Band Peak position between 1357 cm^{-1} and 1580 cm^{-1} have good CSS performance, as shown in Table 1. Modeling studies indicate that the G Band Peak position is influenced by flow rate and pressure, as shown in Figure 2, but to a lesser degree than the effects of temperature.

Figure 3 presents graphically a qualitative modeling study of the effect on carbon film thickness of changes in gas flow rate and sputtering pressure. As can be seen from this figure, increasingly thick films can be deposited in the same period of time by increasing the flow rate. Increasing pressure tends to decrease the rate of film deposition.

Hardness also varies with sputtering process parameters. Hydrogen content of about 15-50v% in carbon films has been associated with adequate film hardness for overcoats for magnetic thin film recording media. (These values are based on analyses using an N&K Carbon Film Analyzer which measured optical properties correlated with hydrogen content.) This is an especially attractive feature for carbon overcoats for magnetic thin film recording media and therefore, it may be desired to carry out sputtering in the presence of hydrogen gas or a hydrocarbon gas, in addition to the inert sputtering gas, typically argon. In particular, hydrogenated carbon films have been produced by alternating current magnetron sputtering methods of the present invention in an atmosphere of argon having 15 v% ethylene.

Internal film stress plays an important role in the utility of a sputtered film. For example, it is desirable to avoid either highly compressively or

highly tensile stressed film conditions for suitable performance as a carbon overcoat for a magnetic thin film recording media.

5 The temperature at which an overlying carbon film is deposited may be significantly influenced by the heating requirements for layers previously deposited on the substrate, e.g., nucleating or magnetic thin film recording layers.

10 In particular, temperature at which deposition occurs can play a significant role in determining film properties. For example, it may be desired to deposit carbon films over CoCrTa magnetic recording layers. However, the temperature at which such a magnetic film is deposited may adversely affect the subsequent
15 deposition of the carbon layer. Thus, it may be desirable to cool the substrate after magnetic deposition and prior to deposition of the carbon film.

20 Figure 4 illustrates the relative CSS performance over 15000 cycles for two groups of magnetic recording disks. In the first group, a 200Å carbon film was deposited onto substrates (nickel plated aluminum-magnesium/550Å Cr/500Å CoCrTa) at 190°C and in the second group the carbon film was deposited over substrates at 140°C. The disks were lubricated with
25 PFPE layers of 18Å, 21Å, 24Å and 27Å. The disks for which the carbon film was deposited at 140°C had relatively lower overall average and average peak stiction values and therefore more attractive CSS performance.

30 The following nonlimiting example illustrates a method according to the present invention for depositing a hydrogenated carbon film onto a magnetic thin film recording medium.

- 12 -

Example 1

The deposition system was a vertical in-line sputtering system described in U.S. Patent Application Serial No. 07/681,866, filed April 4, 1991, and U.S. Patent Application Serial No. 08/121,959, filed September 15, 1993, both applications assigned to the assignee of the present invention and incorporated herein in their entireties by reference. In the carbon sputtering chamber, two planar magnetrons (90 cm x 13.75 cm x 1.81 cm), each with a 99.9 wt% graphite target (supplied by Tosoh Specialty Metals Div., Inc. of Grove City, Ohio), were mounted adjacent to each other along the line of substrate travel. Each pair of targets was 6.1 cm apart. The magnetrons were equipped with surrounding low angle shields, and three gas distribution ports along each side. An apertured shield, 12.8 cm x 5.0 cm x 86.5 cm, was positioned between the coupled magnetrons. Seven apertures, 1.9 cm x 9.6 cm, were located along the length of the apertured shield. The power supply for each pair of targets was the Advanced Energy Model PE 10K capable of supplying 10 kW maximum alternating current to each target.

Sputtering was carried out in the evacuated sputtering chamber backfilled with a gas mixture of argon with 15 v% ethylene, prepared by Scott's Specialty Gases of Fremont, California, flowing at about 36 sccm per target to provide a sputtering pressure of about 10 microns (10 mTorr). About 7 kW was applied to each target at a frequency of 40 kHz.

The substrates, textured 95 mm nickel plated aluminum-magnesium disks having 1100Å Cr and 520Å CoCrTa films, were transported past the graphite targets at a speed of 2.5 cm/sec. The substrates were allowed to cool to about 190°C prior to deposition of

the hydrogenated carbon film. The substrate temperature for optimizing magnetic properties of the CoCrTa film was about 225° C. Under these conditions, a 300Å hydrogenated carbon film was deposited on each side of the substrate in about 30 seconds.

Although specific process parameters are enumerated in this example, it will be understood by those skilled in the art, that specific process parameters depend on several factors including the composition and morphology of the film sought to be deposited and the specific sputtering equipment used.

While not wishing to be bound to any theory of operation, it is believed that the formation, according to the present invention, of hydrogenated carbon films suitable for overcoats in magnetic recording media involves both sputtering (i.e., momentum transfer) and dissociation of ethylene to provide the hydrogen that is incorporated into the carbon sputtered from the target. Raman spectral analysis, including G Band peak data such as that presented in Table 1, suggest that process conditions can be selected such that little, if any, hydrogen is being incorporated into the film by reaction of hydrogen-containing species and carbon to form a relatively soft, substantially polymeric carbon film. Rather, the data suggest that a more polycrystalline carbon structure is being formed and that this structure is responsible for excellent wear properties.

While the invention has been described in connection with specific embodiments thereof, it will be understood that it is capable of further modification, and this application is intended to cover any variations, uses or adaptations of the invention following, in general, the principles of the invention and including such departures from the present

- 14 -

disclosure as come within known or customary practice
in the art to which the invention pertains and as may
be applied to the essential features hereinbefore set
forth and as fall within the scope of the invention and
5 the limits of the appended claims.

CLAIMS

We claim:

1. A method for sputtering a carbon film for a magnetic thin film recording medium, comprising the steps of:

- 5 a) providing carbon-containing targets positioned side by side in an evacuated environment;
- b) flowing a gas into the evacuated environment to a pressure capable of sustaining sputtering;
- c) cyclically sputtering from the targets to form the carbon film on the medium; and
- 10 d) providing apertures between the targets to enhance the movement of electrons toward an anode during the sputtering step.

1 2. A method according to Claim 1, wherein step
2 c) is carried out under shielding conditions that
3 intercept obliquely incident flux from the targets.

1 3. A method according to Claim 1, wherein the
2 gas comprises a hydrocarbon.

1 4. A method according to Claim 3, wherein the
2 carbon film comprises hydrogen from the hydrocarbon
3 gas.

1 5. A method according to Claim 1, wherein the
2 hydrocarbon gas comprises ethylene.

1 6. A method according to Claim 2, wherein the
2 hydrogenated carbon film has a substantially diamond-
3 like structure.

THIS SHEET HAS BEEN
REPLACED

1 7. A method according to Claim 1, wherein the
2 medium comprises multiple layers and step c) is carried
3 out at a temperature at which the carbon is sputtered
4 is relatively reduced from the temperature at which an
5 underlying layer is deposited.

1 8. A method of fabricating a magnetic thin film
2 recording medium, comprising the steps of:
3 depositing a magnetic thin film recording layer
4 onto a substrate; and
5 sputtering, in an atmosphere comprising argon and
6 a hydrocarbon gas, a hydrogenated carbon layer over the
7 magnetic thin film recording layer, the carbon layer
8 comprising carbon from carbon-containing targets and
9 hydrogen from the hydrocarbon gas.

 9. A method for sputtering a dielectric film
onto a substrate, comprising the steps of:

5 a) providing alternating current power to
adjacent targets so that the targets successively act
as a sputtering cathode and as an anode in accordance
with the frequency of the alternating current; and

10 b) moving the substrate past the targets under
shielding conditions provided by an apertured baffle
that directs electrons between the targets to enhance
the rate of sputtering of the film.

1 10. A method according to Claim 9, wherein the
2 dielectric film comprises carbon.

1 11. A method according to Claim 9, wherein the
2 substrate is moved past the targets in an environment
3 comprising a hydrocarbon gas.

12. A sputtering apparatus, comprising:

THIS SHEET HAS BEEN REPLACED

- 17 -

5 a) a pair of magnetrons disposed within a sputtering chamber, the magnetrons having targets and the targets positioned adjacent to each other and acting as a common sputtering area for the deposition of a film;

10 b) an alternating current power supply connected to the magnetrons so that each target in the pair alternately functions as a sputtering cathode and then as an anode according to the frequency of the alternating current; and

15 c) a shielding means between the magnetrons, the shielding means having apertures positioned to direct electrons to the anode as the targets alternate as a sputtering cathode and as the anode.

1 13. A sputtering apparatus according to Claim 12,
2 wherein the targets comprise a dielectric material.

1 14. A sputtering apparatus according to Claim 12,
2 wherein the dielectric material comprises carbon.

1 15. A sputtering apparatus according to Claim 12,
2 further comprising a gaseous hydrocarbon in the
3 sputtering chamber.

THIS SHEET HAS BEEN
REPLACED

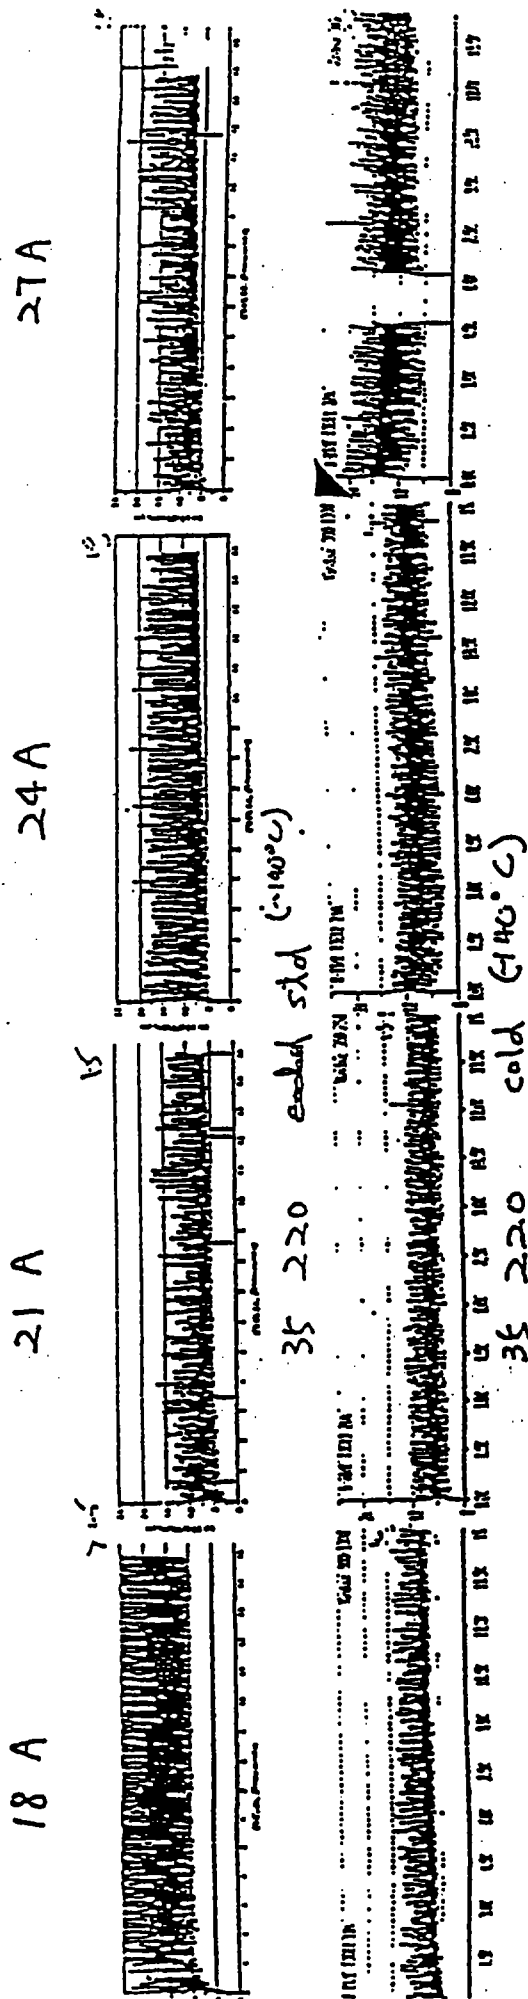


Fig. 4

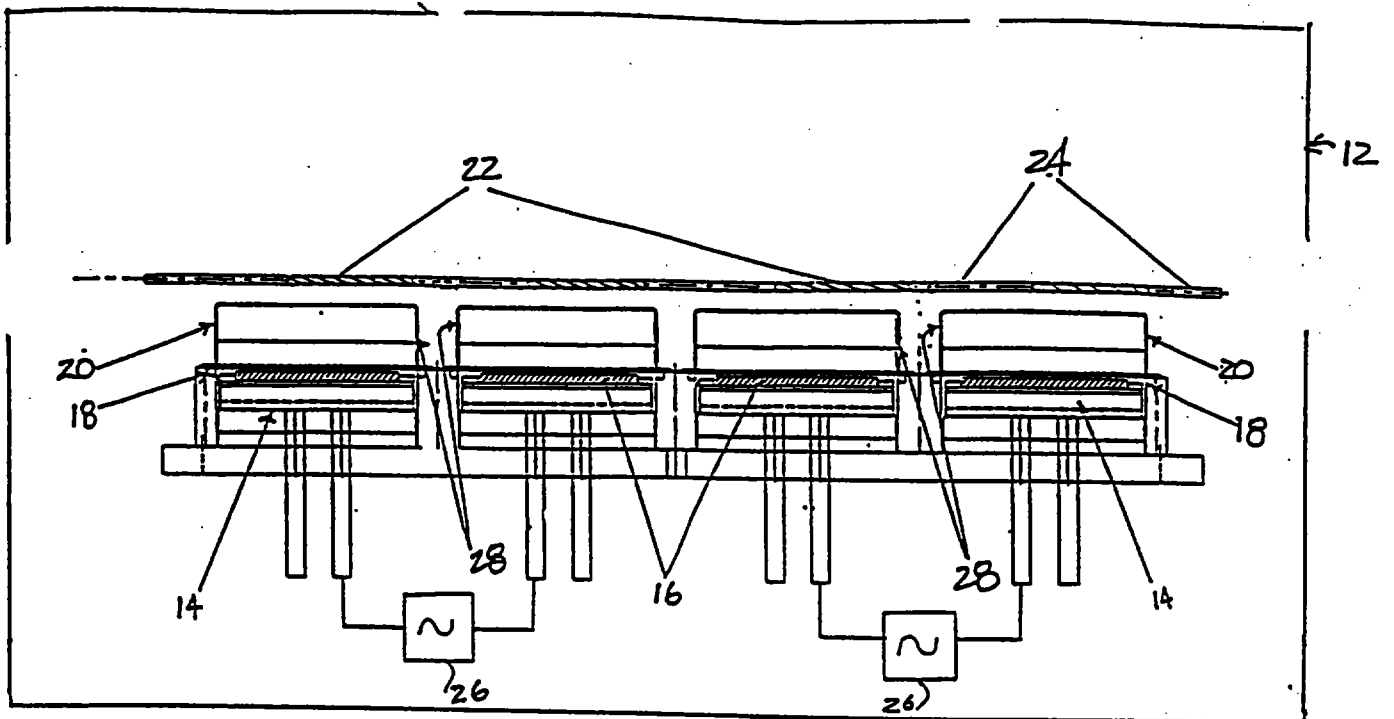


Figure 1A

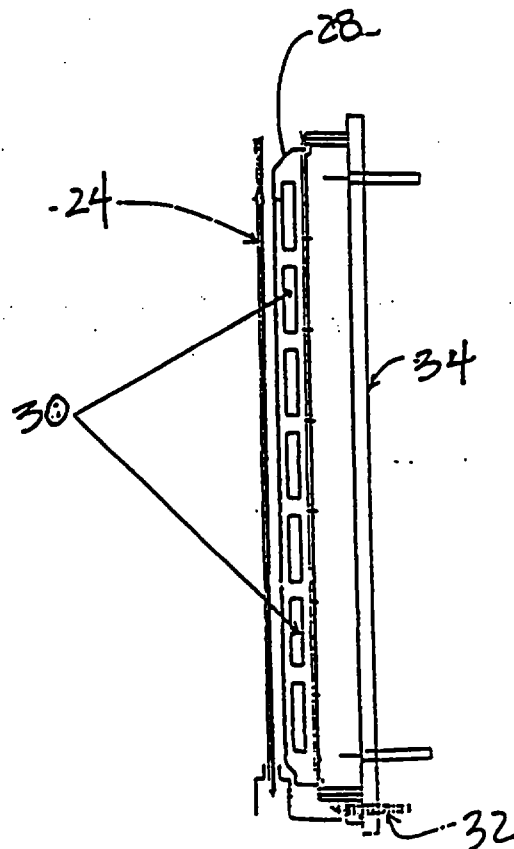


Figure 1B

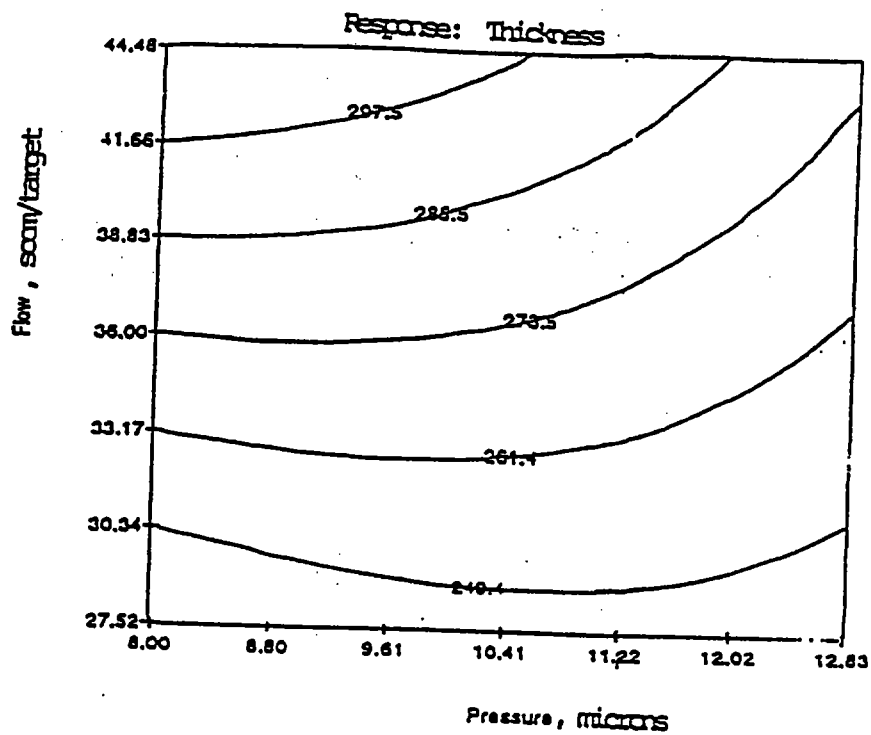


Fig. 3

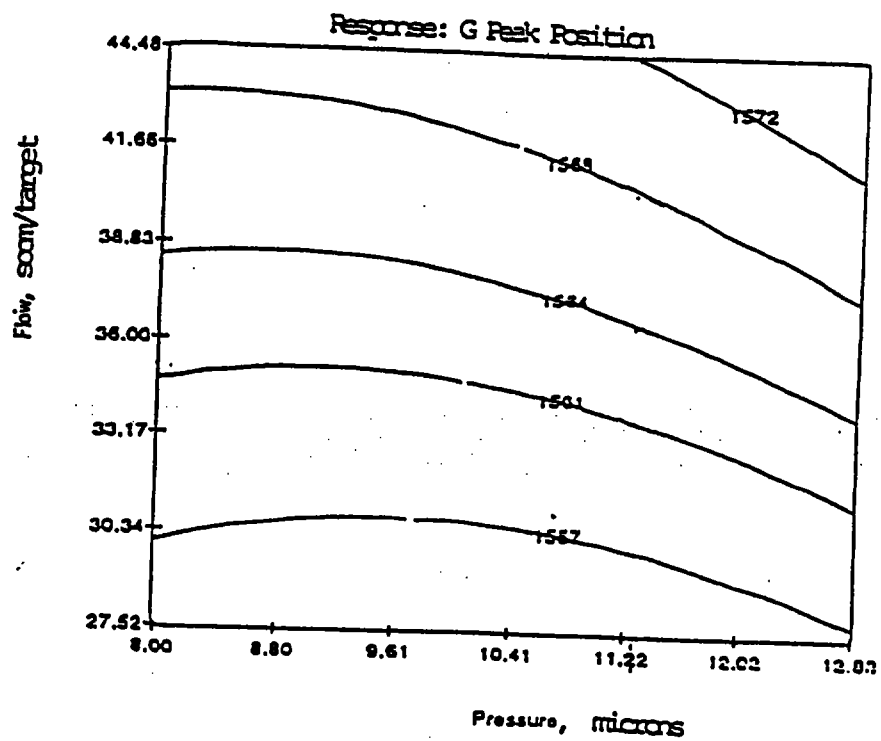


Fig. 2

shielding means having apertures positioned to direct electrons to the anode as the targets alternate as the sputtering cathode and as the anode.

5 A method according to the present invention includes providing carbon-containing targets positioned side by side in an evacuated environment; flowing a gas into the evacuated environment to a pressure capable of sustaining sputtering; providing a.c. power to the targets so that they successively act as sputtering cathode and as anode
10 to form a carbon film on a medium; and providing an apertured baffle between the magnetrons to direct electrons toward the target anode.

15 A method according to the present invention includes providing alternating current power to adjacent targets so that the targets successively act as a sputtering cathode and as an anode in accordance with the frequency of the alternating current; and moving the substrate past the targets under shielding conditions provided by an apertured baffle that directs electrons between the
20 targets to enhance the rate of sputtering of the film.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood by reference to the figures of the drawings wherein like numbers denote like parts throughout and wherein:

25 Figure 1A is a cross-sectional plan view of a sputtering apparatus according to the present invention;

Figure 1B is a side view of an apertured shield for an apparatus according to the present invention;

30 Figure 2 is a graph of the variation in Raman G Band Peak for carbon films as a function of gas flow rate and pressure;

Figure 3 is a graph of the variation of carbon film thickness as a function of gas flow rate and pressure; and

6/A

Figure 4 illustrates the effect of temperature on CSS performance for magnetic recording disks.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Dielectric films may be deposited using a sputtering apparatus according to the present apparatus, as exemplified in Figures 1A and 1B.

5

AMENDED SHEET

CLAIMS

We claim:

1-X. A method for sputtering a carbon film for a magnetic thin film recording medium, comprising the steps of:

5 a) providing carbon-containing targets positioned side by side in an evacuated environment;

b) flowing a gas into the evacuated environment to a pressure capable of sustaining sputtering;

10 c) providing a.c. power to the targets so that they successively act as sputtering cathode and as anode to form the carbon film on the medium; and

d) providing an apertured baffle between the magnetrons to direct electrons toward the target anode.

2. A method according to Claim 1, wherein step c) is carried out under shielding conditions that intercept obliquely incident flux from the targets.

3. A method according to Claim 1, wherein the gas comprises a hydrocarbon.

4. A method according to Claim 3, wherein the carbon film comprises hydrogen from the hydrocarbon gas.

5. A method according to Claim 1, wherein the hydrocarbon gas comprises ethylene.

6. A method according to Claim 2, wherein the hydrogenated carbon film has a substantially diamond-like structure.

7. A method according to Claim 1, wherein the medium comprises multiple layers and step c) is carried

AMENDED SHEET

out at a temperature at which the carbon is sputtered is relatively reduced from the temperature at which an underlying layer is deposited.

8. A method for sputtering a dielectric film onto a substrate, comprising the steps of:

a) providing alternating current power to adjacent targets so that the targets successively act as a sputtering cathode and as an anode in accordance with the frequency of the alternating current; and

b) moving the substrate past the targets under shielding conditions provided by an apertured baffle that directs electrons between the targets to enhance the rate of sputtering of the film.

9. A method according to Claim 8, wherein the dielectric film comprises carbon.

10. A method according to Claim 8, wherein the substrate is moved past the targets in an environment comprising a hydrocarbon gas.

11. A sputtering apparatus, comprising:

a) a pair of magnetrons disposed within a sputtering chamber, the magnetrons having targets and the targets positioned adjacent to each other and acting as a common sputtering area for the deposition of a film;

b) an alternating current power supply connected to the magnetrons so that each target in the pair alternately functions as a sputtering cathode and then as an anode according to the frequency of the alternating current; and

c) a shielding means between the magnetrons, the shielding means having apertures positioned to direct electrons to the anode as the targets alternate as a sputtering cathode and as the anode.

12. A sputtering apparatus according to Claim 11, wherein the targets comprise a dielectric material.

13. A sputtering apparatus according to Claim 11, wherein the dielectric material comprises carbon.

14. A sputtering apparatus according to Claim 11, further comprising a source for introducing a gaseous hydrocarbon in the sputtering chamber.

