



(51) International Patent Classification:

G09F 7/08 (2006.01) **G09F 13/04** (2006.01)
G09F 7/10 (2006.01) **G09F 19/22** (2006.01)
G09F 19/04 (2006.01)

(21) International Application Number:

PCT/GB2009/050718

(22) International Filing Date:

23 June 2009 (23.06.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0811510.7 23 June 2008 (23.06.2008) GB

(71) Applicant (for all designated States except US): **T4 MEDIA LIMITED** [GB/GB]; Elliot House, 10-12 Allington Street, London SW1E 5EH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SAUNDERS, Spencer** [GB/GB]; 4 Colin Road, Caterham Surrey CR3 6LQ (GB). **EVANS, Gordon** [GB/GB]; 120 Kings Road, Kingston Upon Thames, Surrey KT2 5HT (GB).

(74) Agent: **AHMAD, Sheikh, Shakeel**; Keltie, Fleet Place House, 2 Fleet Place, London EC4M 7ET (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMPROVED BARRIER

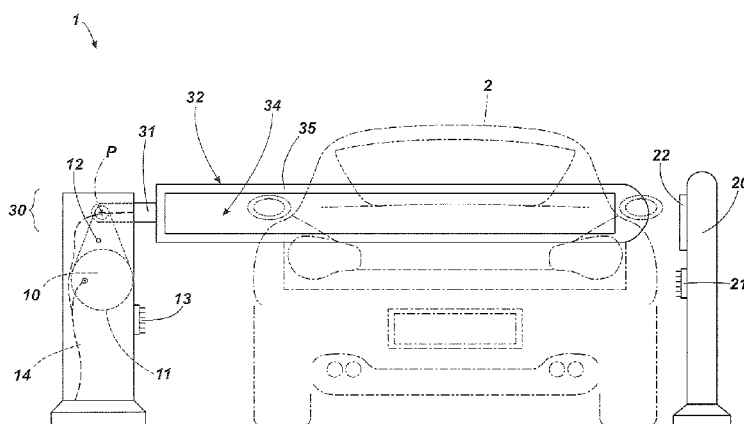


Fig. 1

(57) Abstract: A barrier (30) for use in a barrier system (1) is described. The barrier (30) is movable to control access past the barrier, and said barrier (30) comprises a media support means (32) arranged to support a removable media (34) to be displayed. The support means (32) defines a media receiving path (33) along which the media is movable to an inserted position in which the media is displayed.