



(51) International Patent Classification:

H04L 5/00 (2006.01) H04L 27/26 (2006.01)
H04B 7/04 (2017.01) H04W 72/04 (2009.01)
H04L 5/14 (2006.01)

(21) International Application Number:

PCT/US2019/052175

(22) International Filing Date:

20 September 2019 (20.09.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/734,727 21 September 2018 (21.09.2018) US
16/575,976 19 September 2019 (19.09.2019) US

(71) Applicant: QUALCOMM INCORPORATED [US/US];

Attn: International IP Administration, 5775 Morehouse Drive,
San Diego, CA 92121-1714 (US).

(72) Inventors: SRIDHARAN, Gokul; 5775 Morehouse Drive, San Diego, CA 92121 (US). HUANG, Yi; 5775 Morehouse Drive, San Diego, CA 92121 (US). WANG, Xiao Feng; 5775 Morehouse Drive, San Diego, CA 92121 (US). YANG, Wei; 5775 Morehouse Drive, San Diego, CA 92121 (US). SUNDARARAJAN, Jay Kumar; 5775 Morehouse Drive, San Diego, CA 92121 (US). GAAL, Peter; 5775 Morehouse Drive, San Diego, CA 92121 (US).

(74) Agent: HARRITY, John, E. et al.; 11350 Random Hills Road, Suite 600, Fairfax, VA 22030 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: SOUNDING REFERENCE SIGNAL CONFIGURATIONS TO SUPPORT UPLINK TRANSMISSIONS WITH CYCLIC DELAY DIVERSITY

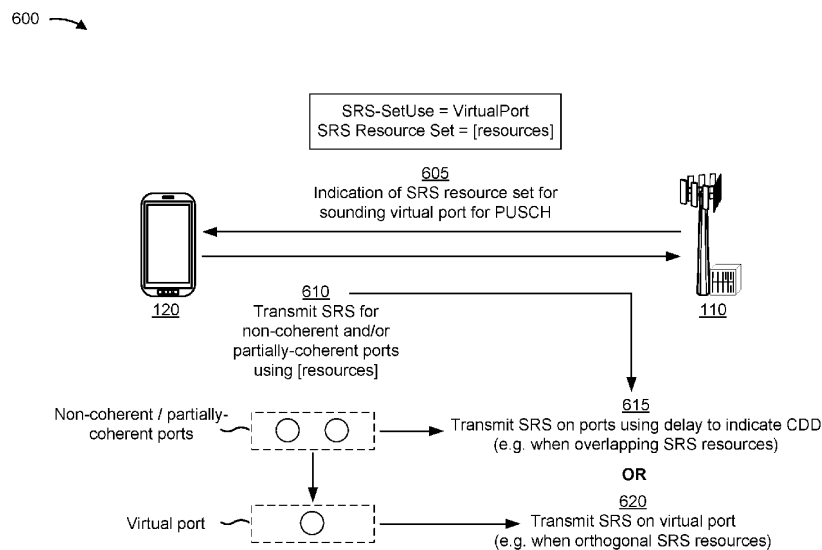


FIG. 6

(57) Abstract: Various aspects of the present disclosure generally relate to wireless communication. In some aspects, a user equipment (UE) may receive an indication of a sounding reference signal (SRS) resource set to be used to signal a virtual port used for a physical uplink shared channel (PUSCH) communication, wherein the virtual port is a combination of at least two non-coherent or partially-coherent antenna ports of the UE using precoding and cyclic delay diversity; and transmit an SRS for the at least two non-coherent or partially-coherent antenna ports using one or more resources of the SRS resource set. Numerous other aspects are provided.

[Continued on next page]

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:

04 June 2020 (04.06.2020)