

(19) World Intellectual Property Organization
International Bureau



162162

(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/28243 A1

(51) International Patent Classification⁷: **A47J 39/00**

(21) International Application Number: PCT/US01/42356

(22) International Filing Date:
28 September 2001 (28.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/679,244 4 October 2000 (04.10.2000) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 09/679,244 (CON)
Filed on 4 October 2000 (04.10.2000)

(71) Applicant (for all designated States except US): **JOHN D. BRUSH & CO., INC.** [US/US], 900 Linden Avenue, Rochester, NY 14625 (US)

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PALLO, R. David**

et al. [US/US]; 1150 Turk Hill Road, Fairport, NY 14450 (US) **EVERY, Roland, M., Jr.** [US/US], 316 Thornell Road, Pittsford, NY 14534 (US) **MASSETH, James, E., Jr.** [US/US]; 88 Aspen Look Drive, Henrietta, NY 14467 (US)


(74) Agents: **STEPHENS, Eugene, S.** et al., Eugene Stephens & Associates, 56 Windsor Street, Rochester, NY 14605 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PI, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,

[Continued on next page]

(54) Title: BLOW-MOLDED SNAPPED-TOGETHER HINGE FOR DOUBLE-WALLED BODY AND LID

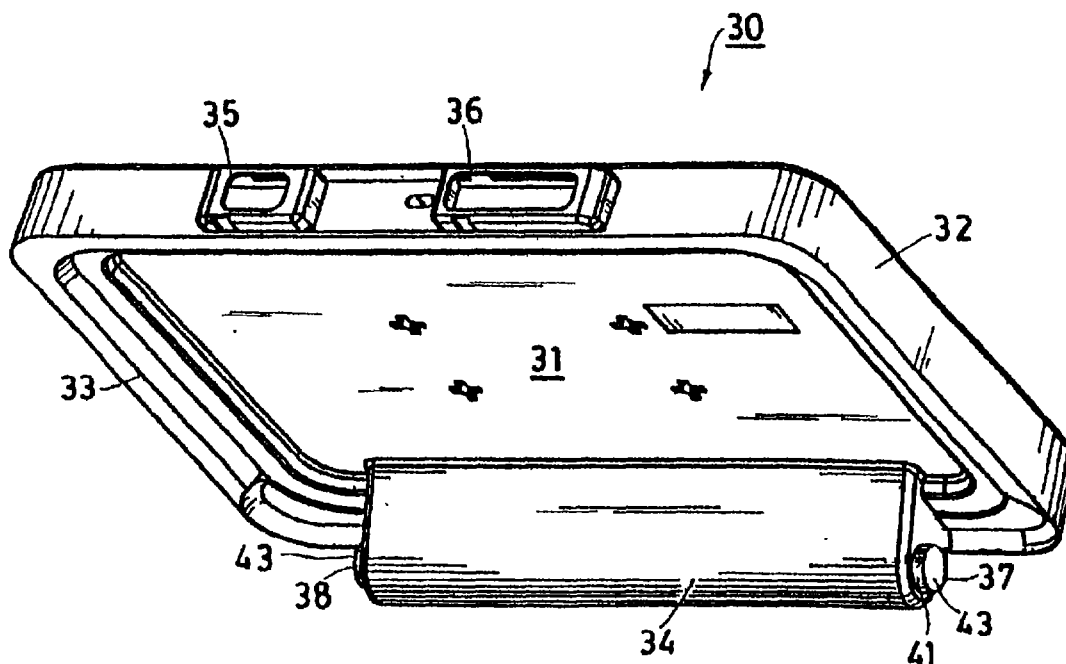

(57) Abstract: Projections (43) and mating recesses (44) for a hinge interconnecting a blow-molded double-walled container (20) and lid (30) are formed to be snap fit together while the recesses (44) are warm from molding. The hinge projections (43) and recesses (44) are assembled, interwall spaces of the body (20) and lid (30) are each filled with a pourable insulation material (50) that sets to make the assembled hinge strong and durable.



G000002

WO 02/28243 A1

CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

Published:

— *with international search report*