

(12) 特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関
国際事務局

(43) 国際公開日
2012 年 10 月 11 日(11.10.2012)




(10) 国際公開番号
WO 2012/137505 A1

- (51) 国際特許分類:
F23D 14/06 (2006.01)
- (21) 国際出願番号: PCT/JP2012/002380
- (22) 国際出願日: 2012 年 4 月 5 日(05.04.2012)
- (25) 国際出願の言語: 日本語
- (26) 国際公開の言語: 日本語
- (30) 優先権データ:
特願 2011-086357 2011 年 4 月 8 日(08.04.2011) JP
- (71) 出願人 (米国を除く全ての指定国について): リン
ナイ株式会社(RINNAI CORPORATION) [JP/JP]; 〒
4540802 愛知県名古屋市中川区福住町 2 番 2 6
号 Aichi (JP).
- (72) 発明者; および
(75) 発明者/出願人 (米国についてのみ): 佐藤 裕康
(SATO, Hiroyasu) [JP/JP]; 〒4540802 愛知県名古屋
市中川区福住町 2 番 2 6 号 リンナイ株式会
社内 Aichi (JP).
- (74) 代理人: 山下 雅昭(YAMASHITA, Masaaki); 〒
1410031 東京都品川区西五反田 8-1-1 4
最勝ビル 9 階 Tokyo (JP).
- (81) 指定国 (表示のない限り、全ての種類の国内保
護が可能): AE, AG, AL, AM, AO, AT, AU, AZ, BA,
BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO,
CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS,
KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT,
LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY,
MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA,
RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV,
SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, ZA, ZM, ZW.
- (84) 指定国 (表示のない限り、全ての種類の広域保
護が可能): ARIPO (BW, GH, GM, KE, LR, LS, MW,
MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), ユーラシ
ア (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨー
ロッパ (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC,
MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).
- 添付公開書類:
— 国際調査報告 (条約第 21 条(3))

(54) Title: BURNER FOR STOVE

(54) 発明の名称: コンロ用バーナ

[図2]

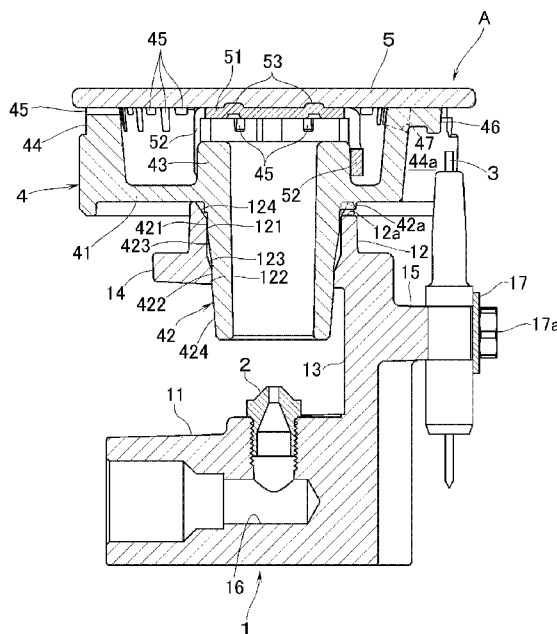

(421).

(57) 要約:

(57) Abstract: A burner for a stove, configured in such a manner that a throat section (42) vertically provided at the center of the lower surface of the burner body (4) is inserted from above into a support tube section (12), which is provided to a burner holder (1), to cause the lower surface of the burner body to be seated on the upper end of the support tube section. The burner for a stove is configured so that the adhesion force of the throat section to the support tube section due to boiled-over liquid is weak, and this is achieved without impairing the stability of the burner body. The outer peripheral surface of the throat section (42) has formed thereon: a cylindrical upper engagement male section (421); a cylindrical lower engagement male section (422) which has a smaller diameter than the upper engagement male section (421); and an intermediate reduced diameter section (423) having a tapered shape and a downwardly reduced diameter or having a cylindrical shape and a smaller diameter than the upper engagement male section (421). The inner peripheral surface of the support tube section (12) has formed thereon: a cylindrical upper engagement female section (121); a cylindrical lower engagement female section (122) having a smaller diameter than the upper engagement female section (121); and a guide section (123) having a tapered shape and a downwardly reduced diameter. The vertical length of the upper engagement female section (121) is set so that the lower end of the upper engagement female section (121) is located below the lower end of the upper engagement male section

[続葉有]

WO 2012/137505 A1