

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
30 September 2021 (30.09.2021)



(10) International Publication Number
WO 2021/194352 A1

(51) International Patent Classification:

A62C 2/06 (2006.01) F16J 15/06 (2006.01)
E04B 1/94 (2006.01) F16L 5/04 (2006.01)

SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(21) International Application Number:

PCT/NO2021/050078

(22) International Filing Date:

24 March 2021 (24.03.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20200349 24 March 2020 (24.03.2020) NO

Published:

— with international search report (Art. 21(3))

(71) Applicant: SCUTI AS [NO/NO]; Neptunvegen 6, 7652
Verdal (NO).

(72) Inventors: JENSEN, Geir; Kyvannsveien 33 A, 7025
Trondheim (NO). STRØM, Ruth Astrid; Falstadvegen 29,
7624 Ekne (NO).

(74) Agent: ACAPO AS; P.O. Box 1880 Nordnes, 5817 Bergen
(NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW,

(54) Title: VENTILATING FIRESTOP

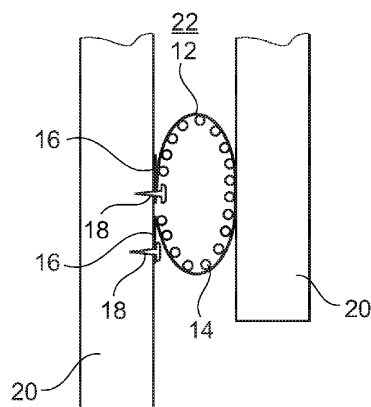


Fig. 6

(57) Abstract: The invention relates to a ventilating firestop (10), comprising a load-bearing mesh (12) fitted with an intumescent (14), wherein the mesh (12) is malleable to a completely or partially confined volume (22), and the intumescent (14) applied to the mesh (12) forms a stripe pattern of intumescent spaced apart and with ventilating openings (30) between the stripes. At least the intumescent (14) in a plane which is exposed by fire forms a fine mesh and rapidly expandable stripe pattern which, during the fire attack phase, seals the openings (30) and forms a fire-insulating shield (40), and the intumescent (14) located separately from the shield (40), after formation of the shield (40), is expandable to subsequently fills up the remaining volume (22) in the firestop (10).

WO 2021/194352 A1