



(51) International Patent Classification:

B31B 1/90 (2006.01) **B65D 5/64** (2006.01)
B65D 5/56 (2006.01) **B65D 65/46** (2006.01)

(21) International Application Number:

PCT/US2019/059539

(22) International Filing Date:

01 November 2019 (01.11.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/755,071 02 November 2018 (02.11.2018) US

(71) Applicant: **LIFE TECHNOLOGIES CORPORATION**
[US/US]; 5823 Newton Drive, Carlsbad, California 92008
(US).

(72) Inventors: **MADANAGOPAL, Arunkumar**; 5823 New-
ton Drive, Carlsbad, California 92008 (US). **BARNITZ,**
Eric; 508 Hill Street, Apt. #1, Santa Monica, California
90405 (US).

(74) Agent: **TANGREN, Dana L.**; Workman Nydegger, 60
East South Temple, Suite 1000, Salt Lake City, Utah 84111
(US).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

(54) Title: TEMPERATURE INSULATED PACKAGING SYSTEMS AND RELATED METHODS

(57) Abstract: A temperature insulated packaging system includes a container having interior surface bounding an interior volume and a liner disposed within the interior volume and at least partially bounding a compartment configured to receive an item for temperature insulated shipping. The liner includes a first sleeve made of cellulose material and at least partially bounds a channel. The first sleeve has an outside wall disposed adjacent to the container and an opposing inside wall disposed adjacent to the compartment configured to receive the item for shipping, the channel being disposed between the inside wall and the outside wall. At least one insulation sheet is disposed within the channel of the first sleeve, the at least one insulation sheet being made of a cellulose material and having a plurality of recesses formed thereon.

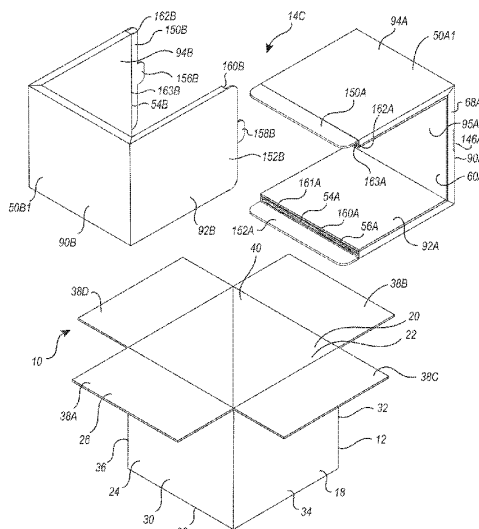


FIG. 14

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*