

(51) International Patent Classification:
H05B 33/08 (2006.01)(21) International Application Number:
PCT/NL2013/050400(22) International Filing Date:
6 June 2013 (06.06.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2008987 12 June 2012 (12.06.2012) NL

(71) Applicant: ORGA HOLDING B.V. [NL/NL]; Strickledeweg 13, NL-3125 AT Schiedam (NL).

(72) Inventors: LEEWANGH, Thomas; c/o Orga Holding B.V., Strickledeweg 13, NL-3125 AT Schiedam (NL).
DEE, Jan-Willem; c/o Orga Holding B.V., Strickledeweg 13, NL-3125 AT Schiedam (NL).

(74) Agent: JANSEN, C.m.; Johan de Wittlaan 7, NL-2517 JR Den Haag (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: OBSTACLE LIGHTING SYSTEM, METHOD FOR CONTROLLING AN OBSTACLE LIGHTING DEVICE

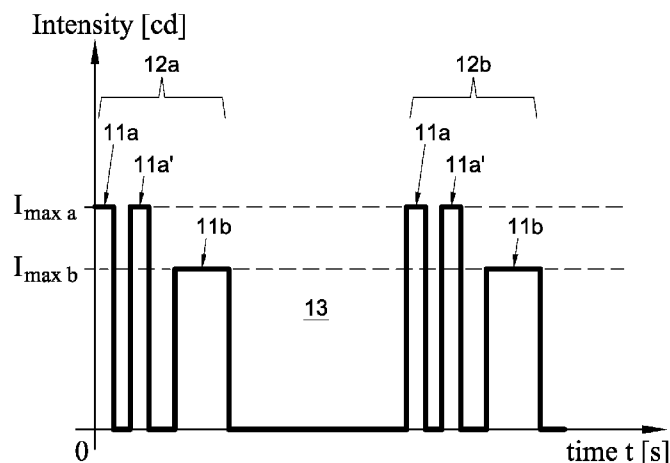


Fig. 3

(57) Abstract: Method for controlling power to be supplied to an obstacle lighting device for emitting light in flashes, wherein the obstacle lighting device comprises a lantern with a housing and at least one light emitting element arranged in the housing; wherein the method comprises providing a control signal to control the power to be supplied to the obstacle lighting device, such that the power to be supplied varies for flashes of different time lengths.