



(51) International Patent Classification:

G09F 13/04 (2006.01) G09F 13/00 (2006.01)
G09F 13/22 (2006.01)

(21) International Application Number:

PCT/NZ2012/000197

(22) International Filing Date:

29 October 2012 (29.10.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

596031 27 October 2011 (27.10.2011) NZ
596752 29 November 2011 (29.11.2011) NZ

(71) Applicant: SCREEN SIGN ARTS LIMITED [NZ/NZ];
96 Gasson Street, Waltham 8023, Christchurch (NZ).

(72) Inventor; and

(71) Applicant (for US only): HUNTER, Richard Stuart
[NZ/NZ]; 45a Marama Crescent, Mt Pleasant 8081, Christchurch (NZ).

(74) Agent: Richard Lyth Patent Attorney; P O Box 20, 248
Governors Bay-Teddington Road, RD 1 Lyttelton, 8971 (NZ).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: AN ILLUMINATED SIGN

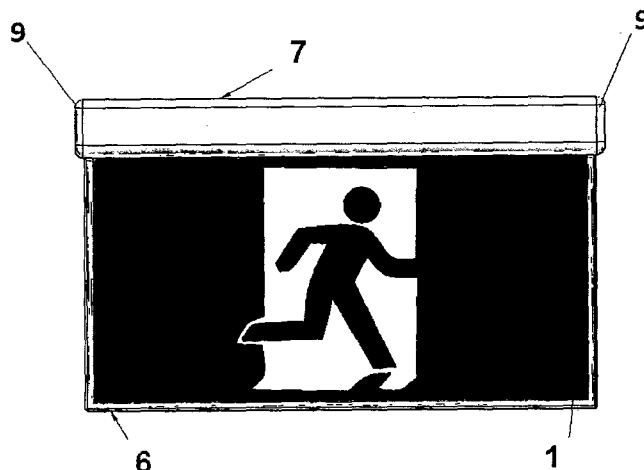


Figure 1

(57) Abstract: An illuminated sign which includes a single or double sided photometric lens one or both sides of which have in juxtaposition therewith a graphics panel. The photometric lens has one edge lit by a strip of light emitting diodes (LED's) and the lens(es) is(are) adapted to spread the LED's light evenly across the graphics panel and through a clip-on frame for the photometric lens and graphics panel(s) which frame can provide edge light distribution for the sign. The photometric lens can also be fitted as an illumination source in an existing exit or the like sign to produce illumination for the existing exit or the like sign.

