

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number
WO 2005/074488 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2005/001692

(22) International Filing Date: 18 January 2005 (18.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/769,061 30 January 2004 (30.01.2004) US

(71) Applicant: KNOLL, INC. [—/US]; 1235 Water Street,
East Greenville, PA 18041 (US).

(72) Inventor: VAN HEKKEN, Hendrik, R.; Lehigh Country,
Allentown, PA (US).


(74) Agent: VRSANSKY, Carla, J.; Buchanan Ingersoll, One
Oxford Centre, 20th Floor, Pittsburgh, PA 15219 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEIGHT ADJUSTMENT MECHANISM FOR A CHAIR

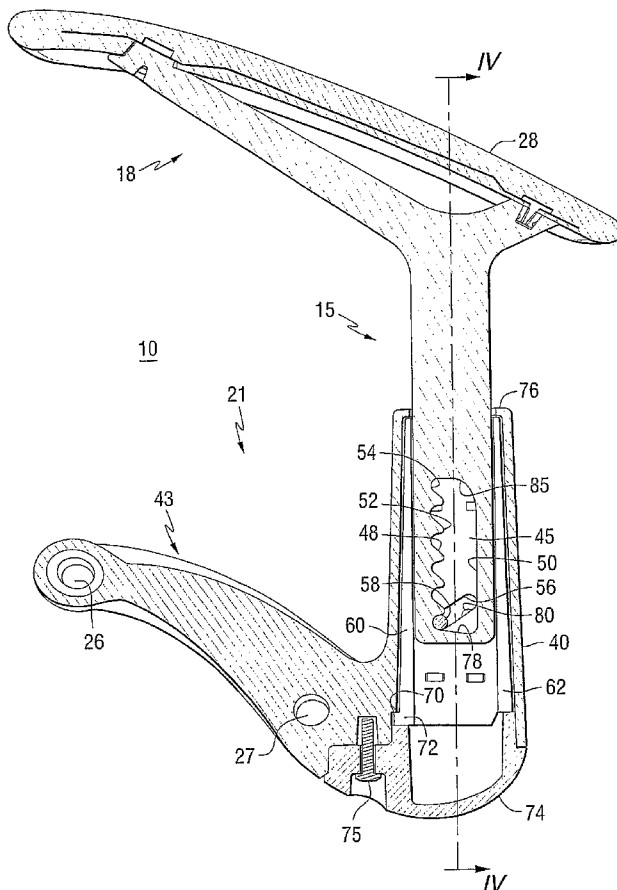

(57) Abstract: An adjustable armrest and height adjustment mechanism. The adjustable arm rest has a fixed member having a housing, a vertically adjustable member having a post slidably disposed in the housing, and a sleeve disposed intermediate the post and the housing. The height adjustment mechanism can include a camming slot formed in the post, an angled slot formed in the sleeve member on opposite sides of the camming slot, a locking pin positioned through each of the camming and angled slots, and a bushing projecting into the angled slot and defining upper and lower regions thereof in which the locking pin can be held. The locking pin is movable between respective notches responsive to upward vertical movement of said post such that the vertically adjustable member is held at a height corresponding to each notch until further upward vertical movement of the post.

WO 2005/074488 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.