

Our Ref.: FU-5

THIS SHEET HAS BEEN REPLACED

- 1 -

POLISHING COMPOSITION

The present invention relates to a polishing composition useful for polishing semiconductors, photomasks, various substrates for memory hard disks and various industrial products such as synthetic resins, or parts thereof. Particularly, it relates to a polishing composition suitable for use for planarization polishing of the surface of device wafers in the semiconductor industries. More particularly, the present invention relates to a polishing composition which provides a high efficiency and is capable of forming an excellent polished surface in polishing silicon dioxide as an interlayer dielectric, to which a CMP technique (described in detail below) has heretofore been applied, and particularly to a polishing composition wherein a rate of polishing a silicon dioxide film is less deteriorated even when recycled for use, and which is excellent in processing stability.

The progress in so-called high technology products including computers has been remarkable in recent years,

This Sheet Has Been Replaced



and with respect to parts such as ULSI to be used for such products, there has been a continuous progress for high density and high speed year by year. Accordingly, in the design rule for semiconductor devices, narrowing
5 of wirings has progressed year by year, so that the depth of focus in a process for producing devices has become shallow and the requirement for flatness of the pattern-forming surface has become severe.

Further, to cope with an increase of the wiring
10 resistance due to narrowing of wirings, stacking of devices is carried out to shorten the wiring length, but the step height of the formed pattern surface has been problematic as a hindrance against stacking.

Accordingly, to carry out such narrowing and
15 stacking, it is necessary to carry out planarization of the desired surface to remove the step height in the process. For the planarization, spin on glass, resist etch back or other planarization methods have heretofore been employed.

20 However, by such conventional methods, it is difficult to attain global planarization (complete planarization) which is required for advanced devices, although partial planarization is possible. Accordingly, a chemical mechanical polishing (hereinafter referred to
25 simply as "CMP") for planarization has now been studied, which is a combination of mechanical or physical polishing and chemical polishing.

Not limited to this CMP, but in various types of polishing of semiconductor wafers, an attention is paid to a metal contamination, particularly inclusion of sodium in a polishing composition. This is because the electric characteristics as a semiconductor will be thereby changed unless the metal contamination is completely removed in a clearing process after the polishing process. Therefore, it is required that a polishing composition is highly pure, and necessarily that its starting materials are also highly pure.

Because of such a background, fumed silica is often used as an abrasive particle to be used for a polishing composition of semiconductor wafers. Among silica used as the abrasive particle, fumed silica has characteristics that it is easier to obtain highly pure silica, and that the rate of polishing a silicon dioxide film to be polished is higher than other silica, e.g. colloidal silica. Accordingly, in a conventional CMP process, it has been common to use a polishing composition having potassium hydroxide, ammonia and others added to the base material of fumed silica and water.

However, there is a problem that a cost of the CMP process is high. The reasons are that the CMP process is complicated, that a substantial investment for equipments is accordingly necessary, that consumption goods used in the CMP process, including a polishing composition, are

expensive, and the like. Also, with regard to the above polishing composition containing fumed silica, fumed silica is comparatively expensive, and therefore, a study is carried out to reduce the costs from various aspects.

5 As one of them, it has been considered to recycle a polishing composition used in the CMP process. However, when the polishing composition was recycled for use, there was a problem that the polishing rate of the polishing composition which polished a surface to be
10 polished, e.g. a silicon dioxide film, gradually decreased as the polishing composition was repeatedly used, and that the process was therefore not stable.

 To solve this problem, the present inventors have conducted an extensive study and, as a result, have found
15 that by adding a basic potassium compound to a polishing composition containing fumed silica and water to bring its specific electric conductivity to from 100 to 5,500 $\mu\text{S}/\text{cm}$ or by adding a nitrogen-containing basic compound thereto to bring its specific electric conductivity to
20 from 100 to 1,500 $\mu\text{S}/\text{cm}$, when the polishing composition is recycled for use, the decrease in the rate of polishing a surface to be polished, e.g. a silicon dioxide film, can be suppressed, and that the process can be stabilized. The present inventors have found also
25 that by bringing the specific electric conductivity to from 30 to 5,000 $\mu\text{S}/\text{cm}$ with regard to a polishing composition containing colloidal silica and water or by

adding further a nitrogen-containing compound thereto to bring its specific electric conductivity to from 30 to 1,500 $\mu\text{S}/\text{cm}$, when the polishing composition is recycled for use, the same effect as above can be obtained.

5 The above conventional polishing composition containing fumed silica or colloidal silica contains large amounts of compounds probably for the purpose of increasing its polishing rate. Therefore, it has a specific electric conductivity larger than that of the
10 polishing composition of the present invention. Whereas, it is surprising that the polishing composition of the present invention having a particular specific electric conductivity does not substantially lose the polishing rate, and even when it is recycled for use, the decrease
15 in the polishing rate is small.

 The present invention is intended to provide a polishing composition which has characteristics that it is highly pure, that the rate of polishing a silicon dioxide film to be polished is high, that an excellent
20 polished surface is obtained and that other basic polishing characteristics are not impaired, which characteristics have been desired for a polishing composition used in a CMP process, particularly a
 polishing composition wherein when the polishing
25 composition is recycled for use, the decrease in the rate of polishing the surface to be polished is small even when repeatedly used, so that the process can be

stabilized.


The first mode of the polishing composition of the present invention is a polishing composition comprising fumed silica, a basic potassium compound and water, which
5 has a specific electric conductivity of from 100 to 5,500 $\mu\text{S}/\text{cm}$. The second mode is a polishing composition comprising fumed silica, a nitrogen-containing basic compound and water, which has a specific electric conductivity of from 100 to 1,500 $\mu\text{S}/\text{cm}$. The third mode
10 of the polishing composition of the present invention is a polishing composition comprising colloidal silica and water, which has a specific electric conductivity of from 30 to 5,000 $\mu\text{S}/\text{cm}$. The fourth mode is a polishing composition comprising colloidal silica, a nitrogen-
15 containing basic compound and water, which has a specific electric conductivity of from 30 to 1,500 $\mu\text{S}/\text{cm}$.

The polishing composition of the present invention has a high rate of polishing the surface to be polished. Further, when it is recycled for use, the decrease in the
20 rate of polishing the surface to be polished when repeatedly used, is smaller than a conventional polishing composition having a high specific electric conductivity, so that the process can be stabilized.

Fumed silica/colloidal silica

25 The polishing composition of the present invention contains fumed silica or colloidal silica as the main abrasive particle.

The fumed silica of the present invention is produced by pyrolyzing at a high temperature (including combustion) a precursor which can be pyrolyzed to provide silicon oxide, such as a halogenide, particularly a
5 chloride. For example, the fumed silica is produced by combustion of silicon tetrachloride and hydrogen in air. The reaction formula is as follows.



A particle of this fumed silica generally has a shape
10 of a secondary particle having a chain structure wherein a few or a few tens fine primary particles are gathered. Such fumed silica is available on the market, for example, with a trade name Aerosil by Japan Aerosil Corporation.

15 On the other hand, the colloidal silica for the purpose of the present invention is water colloidal silica or gel, which includes all stable dispersions of amorphous silica in fluids. As a method for producing such colloidal silica, there are a wet process, a silica
20 gel peptization method, an ion-exchanging method, a hydrolysis method of an organic silicon compound and others. However, a method for producing the colloidal silica of the present invention is not particularly limited unless the effects of the present invention are
25 impaired. It is preferred that the colloidal silica used in the present invention contains metal as little as possible. This may be achieved by lowering the metal

content by the producing method or by purification by means of ion-exchanging treatment or the like.

The fumed silica or the colloidal silica used in the present invention polishes the surface to be polished by a mechanical function as abrasive particles. The average particle size of the fumed silica in terms of a sphere calculated from the specific surface area measured by a BET method, is usually from 5 to 80 nm, preferably from 10 to 65 nm. The average particle size of the colloidal silica in terms of a sphere calculated from the specific surface area measured by a BET method, is usually from 5 to 200 nm, preferably from 10 to 150 nm. If the average particle size of the fumed silica exceeds 80 nm, or if the average particle size of the colloidal silica exceeds 200 nm, a problem that the surface polished becomes rough or scratched, sometimes occurs. On the other hand, if the average particle size of the fumed silica or the colloidal silica is less than 5 nm, the polishing rate becomes remarkably low, such is not practical.

The content of the fumed silica used in the present invention is usually from 0.1 to 50% by weight, preferably from 1 to 25% by weight based on the total amount of the polishing composition. The content of the colloidal silica used in the present invention is usually from 0.05 to 50% by weight, preferably from 0.1 to 30% by weight based on the total amount of the polishing composition. If the content of the fumed silica or the

colloidal silica is too small, the polishing rate becomes low, such is not practical. On the other hand, if it is too large, homogeneous dispersion can not be maintained, and the viscosity of the composition becomes so large
5 that it sometimes becomes difficult to handle it.

Water

Water used in the present invention may be industrial water, city water, ion-exchange water, distilled water, pure water, extrapure water or the like, and is not
10 particularly limited unless it impairs the effects of the present invention. The content of water in the polishing composition of the present invention is usually from 49.5 to 99.89% by weight, preferably from 74.6 to 98.9% by weight, based on the total amount of the polishing
15 composition containing fumed silica, a basic potassium compound and water, and is usually from 49 to 99.89% by weight, preferably from 74.5 to 98.9% by weight, based on the total amount of the polishing composition containing fumed silica, a nitrogen-containing basic compound and
20 water. It is usually from 48.5 to 99.95% by weight based on the total amount of the polishing composition containing colloidal silica and water, and is usually from 45 to 99.94% by weight, preferably from 65 to 99.89% by weight, based on the total amount of the polishing
25 composition containing colloidal silica, a nitrogen-containing basic compound and water.

Basic potassium compound/nitrogen-containing basic

compound

The basic potassium compound or the nitrogen-containing basic compound used for the polishing composition of the present invention accelerates
5 polishing of a surface to be polished by a chemical action. The basic potassium compound or the nitrogen-containing basic compound also acts as a dispersant for fumed silica or colloidal silica which is the main abrasive particle.

10 As the basic potassium compound to be used in the present invention together with fumed silica, or if necessary, together with colloidal silica, any basic potassium compound may be used unless it impairs the effects of the present invention. A desired basic
15 potassium compound is a hydroxide, a phosphate, a pyrophosphate, a phosphite, a carbonate, a silicate, a borate, a hypochlorite, a hypobromite or a carboxylate such as a gluconate, a lactate, a citrate, a tartarate, a malate, a glycolate, a malonate, a formate or an oxalate,
20 and it is preferably a salt of a weak acid.

The content of the basic potassium compound in the polishing composition is, when used together with fumed silica, usually from 0.01 to 0.5% by weight, preferably from 0.1 to 0.4% by weight, based on the total amount of
25 the polishing composition. When used together with colloidal silica, it is preferably at most 1.5% by weight based on the total amount of the polishing composition.

The nitrogen-containing basic compound to be used in the present invention together with fumed silica or colloidal silica, includes an ammonium compound, an amine compound and others, and any nitrogen-containing basic compound may be used unless it impairs the effects of the present invention. Ammonia is a typical one.

Specifically, a desired nitrogen-containing basic compound is, when used together with fumed silica, an ammonium hydroxide, an ammonium phosphate, an ammonium carbonate, an ammonium silicate, an ammonium borate, an ammonium hypochlorite, an ammonium hypobromite or an amine compound, and it is preferably an ammonium salt of a weak acid. When used together with colloidal silica, it is an ammonium hydroxide, an ammonium phosphate, an ammonium carbonate, an ammonium silicate, an ammonium borate, an ammonium hypochlorite, an ammonium hypobromite, an ammonium carboxylate such as an ammonium gluconate, an ammonium malonate, an ammonium formate or ammonium oxalate, or an amine compound, and it is preferably an ammonium salt of a weak acid.

The content of the nitrogen-containing basic compound in the polishing composition is, when used together with fumed silica, usually from 0.01 to 1% by weight, preferably from 0.1 to 0.5% by weight, based on the total amount of the polishing composition. When used together with colloidal silica, it is preferably from 0.01 to 5% by weight. If the content of the nitrogen-containing

basic compound is too small, the polishing rate becomes remarkably low. On the other hand, if it is too large, when recycled for use, the initial rate of polishing a silicon dioxide film tends to become a little higher, but
5 the polishing rate becomes remarkably low when repeatedly used.

Polishing composition

The polishing composition of the present invention is usually prepared by mixing and dispersing or dissolving
10 the above components, i.e. fumed silica and a basic potassium compound or a nitrogen-containing basic compound, or colloidal silica and if necessary a basic potassium compound or a nitrogen-containing basic compound, into water in predetermined amounts. The order
15 for dispersing or dissolving the above components or various additives to be added if necessary (which will be described in detail below), is not particularly limited. For example, fumed silica or colloidal silica may be dispersed, and a basic potassium compound or a nitrogen-
20 containing basic compound may be dissolved thereinto, or into an aqueous solution wherein a basic potassium compound or a nitrogen-containing basic compound is dissolved, fumed silica or colloidal silica may be dispersed. Further, fumed silica or colloidal silica,
25 and the basic potassium compound or the nitrogen-containing basic compound may be mixed into water at the same time and dispersed and/or dissolved at the same

time.

The polishing composition of the present invention contains the basic potassium compound or the nitrogen-containing basic compound, but the basic potassium
5 compound or the nitrogen-containing basic compound may be obtained in the polishing composition. Namely, a neutral or acidic potassium salt such as potassium chloride or potassium nitrate, or a neutral or acidic nitrogen-containing salt such as ammonium chloride or ammonium
10 nitrate, and a basic compound such as sodium hydroxide may be used at the same time to obtain the same state as a state wherein the basic potassium compound or the nitrogen-containing basic compound is added to the polishing composition. However, in this method, the
15 specific electric conductivity which is described below, becomes too large, or excessive ions exist, which causes a problem of impurities. Accordingly, it is usual that the basic potassium compound or the nitrogen-containing basic compound is directly used.

20 The method for dispersion or dissolution is optional. For example, the dispersion or dissolution is carried out by stirring with an agitator or by ultrasonic dispersion.

Further, for the preparation of the polishing composition, various known additives may be incorporated
25 for the purpose of maintaining or stabilizing the quality of the product or as required depending upon the type of the object to be treated, the treating conditions and

other polishing requirements.

Preferred examples of such further additives include (a) when fumed silica is used as an abrasive particle, silicon dioxides other than fumed silica, such as colloidal silica and precipitated silica, or when colloidal silica is used as an abrasive particle, silicon dioxides other than colloidal silica, such as fumed silica and precipitated silica, (b) celluloses such as cellulose, carboxymethylcellulose and hydroxyethylcellulose, (c) water-soluble alcohols such as ethanol, propanol and ethylene glycol, (d) surfactants such as sodium alkylbenzene sulfonate and a condensate of formalin with naphthalene sulfonic acid, (e) organic polyanion substances such as a lignin sulfonate and a polyacrylate, (f) inorganic salts such as ammonium sulfate, magnesium chloride, potassium acetate and aluminum nitrate, (g) water-soluble polymers (emulsifiers) such as polyvinyl alcohol, (h) aluminum oxides such as alumina sol and fumed alumina, (i) zirconium oxides such as fumed zirconia, and (j) titanium oxides such as fumed titania and others.

The polishing composition of the present invention is prepared as described above. Its specific electric conductivity is from 100 to 5,500 $\mu\text{S}/\text{cm}$, preferably from 500 to 4,000 $\mu\text{S}/\text{cm}$, when fumed silica, the basic potassium compound and water are contained. It is from 100 to 1,500 $\mu\text{S}/\text{cm}$, preferably from 300 to 1,200 $\mu\text{S}/\text{cm}$,

when fumed silica, the nitrogen-containing basic compound and water are contained. It is from 30 to 5,000 $\mu\text{S}/\text{cm}$, preferably from 50 to 4,000 $\mu\text{S}/\text{cm}$, when colloidal silica and water are contained. It is from 30 to 1,500 $\mu\text{S}/\text{cm}$, preferably from 50 to 1,200 $\mu\text{S}/\text{cm}$, when colloidal silica, a nitrogen-containing basic compound and water are contained.

If the specific electric conductivity of the polishing composition is less than 100 $\mu\text{S}/\text{cm}$ when fumed silica is used as an abrasive particle, or is less than 30 $\mu\text{S}/\text{cm}$ when colloidal silica is used, it is difficult to disperse fumed silica sufficiently. On the other hand, if it exceeds 5,500 $\mu\text{S}/\text{cm}$ with a composition containing fumed silica, a basic potassium compound and water, exceeds 5,000 $\mu\text{S}/\text{cm}$ with a composition containing colloidal silica and water, or exceeds 1,500 $\mu\text{S}/\text{cm}$ with a composition containing fumed silica or colloidal silica, a nitrogen-containing basic compound and water, the polishing rate becomes remarkably low when the polishing composition is recycled for use repeatedly.

The polishing composition of the present invention will usually have a pH of at least 7 so that it contains the basic compound stably.

The polishing composition of the present invention may be prepared in the form of a stock solution having a relatively high concentration, which may be stored or transported and which may be diluted for use at the time

of actual polishing operation. The above-mentioned preferred ranges of concentration are those for actual polishing operation. Accordingly, when the composition is stored or transported in the form of a stock solution, such a stock solution is prepared to have a higher concentration.

The polishing composition of the present invention as described above is highly pure, and an excellent polished surface can thereby be obtained. Accordingly, it is useful for polishing semiconductor devices, photomasks, various substrates for memory hard disks, synthetic resins and others. When the polishing composition of the present invention is recycled for use, even though it is repeatedly used, the decrease in the rate of polishing a silicon dioxide film can be suppressed, and it is excellent in stability of processing. Accordingly, the polishing composition of the present invention is suitable for a CMP processing technique of device wafers in the semiconductor industry.

Now, the polishing composition of the present invention will be described in further detail with reference to Examples. However, it should be understood that the present invention is by no means restricted to the specific constructions of the following Examples.

Preparation of polishing compositions

Firstly, as an abrasive particle, fumed silica (tradename; Aerosil 50, mean primary particle size: 55

nm, manufactured by Japan Aerosil Corporation) was dispersed in water by an agitator to obtain a slurry having an abrasive particle concentration of 12 wt%. Further, colloidal silica (mean particle size: 0.035 μm) was likewise dispersed in water to obtain a slurry having an abrasive particle concentration of 20 wt%. Then, to these slurries, a basic potassium compound or a nitrogen-containing basic compound was added and mixed in an amount as identified in Table 1, to obtain samples of Examples 1 to 12 and Comparative Examples 1 to 11. A basic potassium compound was not added to the sample of Example 9.

Measurement of specific electric conductivity

After preparing the compositions, with respect to the respective sample of Examples 1 to 12 and Comparative Examples 1 to 11, the specific electric conductivities were measured under the same conditions. The results thus obtained are shown in Table 1.

Polishing tests

Then, polishing tests were carried out by means of the samples of Examples 1 to 12 and Comparative Examples 1 to 11.

As the object to be polished, a substrate of 6 inch silicon wafer (outer diameter: about 150 mm) having a silicon dioxide film formed by a thermal oxidation method, was used. The silicon dioxide film surface was polished.

Polishing and recycling of the polishing composition were carried out by the following methods.

Firstly, a wafer provided with a silicon dioxide film was mounted on a polishing machine, and was polished for
5 3 minutes under the following conditions.

Then, the wafer was removed from the polishing machine, and the polishing pad was washed with pure water for 1 minute by using a dressing material. The polishing composition which was used for polishing, was collected
10 and filtrated sequentially with a filter having an opening of sieve of 10 μm and a filter having an opening of sieve of 5 μm by using a pump, to be used for subsequent polishing.

The above series of operations was counted as 1 set,
15 and 6 sets of the series of operations were repeatedly carried out.

Polishing conditions

Polishing machine: single side polishing machine (diameter
of the polishing table: 570 mm)

20 Table of polishing machine: laminated polishing pad made
of polyurethane (IC-
1000/Suba400 manufactured by
Rodel Co. (USA))

Polishing pressure: 490 g/cm²

25 Rotational speed of polishing table: 35 rpm

Feed rate of polishing composition: 150 cc/minute

After the polishing, the wafer was sequentially

cleared and dried, whereupon the reduction in the film thickness of each wafer by polishing was measured with respect to 60 samples, and the polishing rate was obtained.

- 5 Further, the deterioration ratio of the rate of polishing the silicon dioxide film was obtained by dividing the polishing rate at the sixth set by the polishing rate at the first set. The results thus obtained are shown in Table 1.

Table 1

Comparative Example	Polishing agent	Additive	Amount added (g/l)	Specific electric conductivity ($\mu\text{S}/\text{cm}$)	Polishing rate (nm/min)						Rate keeping ratio (%)
					1st	2nd	3rd	4th	5th	6th	
1	Fumed silica	Potassium hydroxide	6	5800	181	180	175	172	170	166	91.7
2	Fumed silica	Potassium pyrophosphate	6	7500	140	137	135	134	131	128	91.4
3	Fumed silica	Potassium carbonate	6	8200	149	148	143	140	139	136	91.2
4	Fumed silica	Ammonia	15	2500	160	155	157	155	153	147	91.9
5	Fumed silica	Piperazine	50	2000	28	28	26	25	26	25	89.3
6	Colloidal silica	Potassium hydroxide	20	7000	115	115	112	110	108	105	91.3
7	Colloidal silica	Potassium pyrophosphate	20	14000	89	87	86	83	83	81	91.0
8	Colloidal silica	Potassium carbonate	20	12500	90	89	87	85	83	82	91.1
9	Colloidal silica	Ammonia	60	3200	120	119	116	113	111	110	91.7
10	Colloidal silica	Ethylene diamine	60	2700	85	83	80	81	80	78	91.8
11	Colloidal silica	Triammonium phosphate	60	43000	85	85	82	82	80	77	90.6

Table 1 (continued)

Example	Polishing agent	Additive	Amount added (g/l)	Specific electric conductivity ($\mu\text{S/cm}$)	Polishing rate (nm/min)						Rate keeping ratio (%)
					1st	2nd	3rd	4th	5th	6th	
1	Fumed silica	Potassium hydroxide	3	3500	176	176	172	174	172	172	97.7
2	Fumed silica	Potassium pyrophosphate	3	3200	137	137	136	135	135	134	97.8
3	Fumed silica	Potassium carbonate	3	3200	145	143	143	141	142	141	97.2
4	Fumed silica	Ammonia	3	1200	154	153	152	152	151	151	98.1
5	Fumed silica	Piperazine	3	300	22	23	23	22	22	22	100.0
6	Colloidal silica	Potassium hydroxide	10	2050	112	113	114	113	113	112	100.0
7	Colloidal silica	Potassium pyrophosphate	4.5	4000	87	87	86	86	86	86	97.7
8	Colloidal silica	Potassium carbonate	6	4000	88	87	87	86	86	86	97.7
9	Colloidal silica	(None)	0	80	70	70	70	70	70	70	100.0
10	Colloidal silica	Ammonia	5	1400	100	100	100	99	100	99	99.0
11	Colloidal silica	Ethylene diamine	5	760	80	80	80	80	80	80	100.0
12	Colloidal silica	Triammonium phosphate	1	1080	80	79	80	80	79	79	98.8

From the results in Table 1, it is evident that the polishing composition of the present invention has a polishing rate which is not substantially deteriorated as compared with a conventional polishing composition having
5 a large specific electric conductivity, and that even when it is recycled for use, the decrease in the polishing rate is less than the polishing composition having a large specific electric conductivity, and a stable polishing rate is obtainable.

10 Further, none of wafers used in these tests had surface defects such as scratches, and there was no particular problem in the state of the polished surface.

As described in the foregoing, the polishing composition of the present invention has a polishing rate
15 which decreases little even when recycled for use repeatedly, and it can keep the high polishing rate at the initial stage of the recycling stably, so that the process can be stabilized.



CLAIMS:

1. A polishing composition comprising fumed silica, a basic potassium compound and water, of which the specific electric conductivity is from 100 to 5,500 $\mu\text{S}/\text{cm}$.
- 5 2. The polishing composition according to Claim 1, wherein the basic potassium compound is selected from the group consisting of a hydroxide, a phosphate, a pyrophosphate, a phosphite, a carbonate, a silicate, a borate, a hypochlorite, a hypobromite and a carboxylate.
- 10 3. The polishing composition according to Claim 1 or 2, wherein, based on the total amount of the polishing composition, the basic potassium compound is in an amount of from 0.01 to 0.5 wt%.
4. A polishing composition comprising fumed silica, a
15 nitrogen-containing basic compound and water, of which the specific electric conductivity is from 100 to 1,500 $\mu\text{S}/\text{cm}$.
5. The polishing composition according to Claim 4, wherein the nitrogen-containing basic compound is
20 selected from the group consisting of an ammonium hydroxide, an ammonium phosphate, an ammonium carbonate, an ammonium silicate, an ammonium borate, an ammonium hypochlorite, an ammonium hypobromite and an amine compound.
- 25 6. The polishing composition according to Claim 4 or 5, wherein, based on the total amount of the polishing composition, the nitrogen-containing basic compound is in



an amount of from 0.01 to 1 wt%.

7. The polishing composition according to any one of Claims 1 to 6, wherein the fumed silica has a mean primary particle size of from 5 to 80 nm.

5 8. A polishing composition comprising colloidal silica and water, of which the specific electric conductivity is from 30 to 5,000 $\mu\text{S}/\text{cm}$.

9. The polishing composition according to Claim 8, which also contains a basic potassium compound.

10 10. The polishing composition according to Claim 9, wherein the basic potassium compound is selected from the group consisting of a hydroxide, a phosphate, a pyrophosphate, a phosphite, a carbonate, a silicate, a borate, a hypochlorite, a hypobromite and a carboxylate.

15 11. The polishing composition according to Claim 9 or 10, wherein, based on the total amount of the polishing composition, the basic potassium compound is in an amount of at most 1.5 wt%.

12. A polishing composition comprising colloidal silica,
20 a nitrogen-containing basic compound and water, of which the specific electric conductivity is from 30 to 1,500 $\mu\text{S}/\text{cm}$.

13. The polishing composition according to Claim 12, wherein the nitrogen-containing basic compound is
25 selected from the group consisting of an ammonium hydroxide, an ammonium phosphate, an ammonium carbonate, an ammonium silicate, an ammonium borate, an ammonium



hypochlorite, an ammonium hypobromite, an ammonium carboxylate and an amine compound.

14. The polishing composition according to Claim 12 or 13, wherein, based on the total amount of the polishing
5 composition, the nitrogen-containing basic compound is in an amount of from 0.01 to 0.5 wt%.

15. The polishing composition according to any one of Claims 8 to 14, wherein the colloidal silica has a mean primary particle size of from 5 to 200 nm.

10 16. Use of the polishing composition as defined in claim 1, 4, 8 or 12 as a composition for polishing a silicon dioxide film.


17. A method for polishing a silicon dioxide film, wherein the polishing composition as defined in Claim 1,
15 4, 8 or 12 is used as a composition for polishing the silicon dioxide film.

THIS SHEET HAS BEEN
REPLACED

ABSTRACT

A polishing composition comprising fumed silica, a basic potassium compound and water, of which the specific electric conductivity is from 100 to 5,500 $\mu\text{S}/\text{cm}$.

This Sheet Has Been Replaced




- 1 -

REPLACEMENT SHEETS		SG
☒	Description	: paged 1. to paged 7.
☐	Claim(s)	: paged to paged
☐	Drawing(s)	: paged to paged
☒	Abstract	: paged 4. to paged 7.
DATE OF RECEIPT 28/1/98		

POLISHING COMPOSITION

The present invention relates to a polishing composition useful for polishing semiconductors, photomasks, various substrates for memory hard disks and various industrial products such as synthetic resins, or parts thereof. Particularly, it relates to a polishing composition suitable for use for planarization polishing of the surface of device wafers in the semiconductor industries. More particularly, the present invention relates to a polishing composition which provides a high efficiency and is capable of forming an excellent polished surface in polishing silicon dioxide as an interlayer dielectric, to which a CMP technique (described in detail below) has heretofore been applied, and particularly to a polishing composition wherein a rate of polishing a silicon dioxide film is less deteriorated even when recycled for use, and which is excellent in processing stability.

The progress in so-called high technology products including computers has been remarkable in recent years,

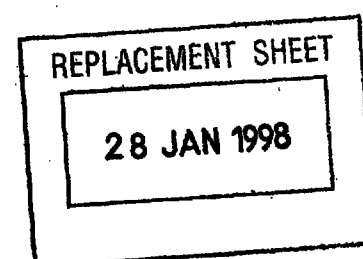

POLISHING COMPOSITION

ABSTRACT

A polishing composition comprising fumed silica, a basic potassium compound and water, of which the specific electric conductivity is from 100 to 5,500 $\mu\text{S}/\text{cm}$.

9704210-5

28 JAN 1998