

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
21 November 2024 (21.11.2024)



(10) International Publication Number
WO 2024/238081 A1

(51) International Patent Classification:

G01R 31/3835 (2019.01) G01R 31/396 (2019.01)
G01R 31/392 (2019.01)

(21) International Application Number:

PCT/US2024/025075

(22) International Filing Date:

18 April 2024 (18.04.2024)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

202311034433 17 May 2023 (17.05.2023) IN

(71) Applicant: **CATERPILLAR INC.** [US/US]; 100 NE
Adams Street, Peoria, Illinois 61629-6450 (US).

(72) Inventors: **KANNIAPPAN, Gopalakrishnan**; 1-28, Pud-
hu Street, Mazhavangkarana, Vandavasi, Tiruvannamalai

604408 (IN). **SHANAVAZ, Aswak**; 2, Asiya Manzil, NP
Nagar, Kangayam Road, Tiruppur (IN). **VARADHARA-
JAN, Sudarshan**; 301, A3 Block, Mahaveer Ranches,
Sri Sai Layout, Naganathapura, Bangalore 560100 (IN).
RAMKUMAR, Chandana; 6A, Nehru Nagar, Shanthi
Medu, Press Colony Post, Coimbatore 641019 (IN). **KU-
MAR, Gowtham**; Plot: 5-A 12th Cross, Bharathi Nagar,
Lawspet, Puducherry 605008 (IN).

(74) Agent: **GAHLINGS, Steven A.** et al.; Caterpillar Inc., 100
NE Adams Street - AB6450, Peoria, Illinois 61629-6450
(US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,

(54) Title: VOLTAGE MONITORING DEVICE

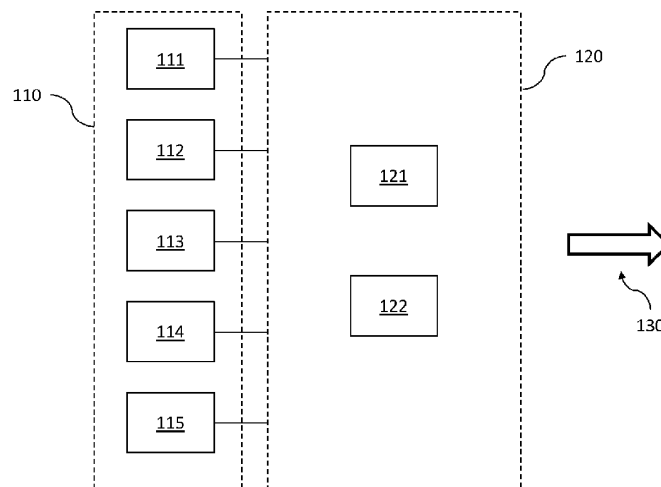


Fig. 1

(57) Abstract: A voltage monitoring device for monitoring voltages of more than one battery, wherein the voltage monitoring device comprises a voltage sensor configured to measure a voltage value of a battery. The voltage sensor is connected to one battery at a given time. The voltage monitoring device is configured to connect to terminals of more than one battery. Each battery is electrically connected to a voltage sensor and a voltage value of the battery connected to the voltage sensor is measured, wherein during the measurement the battery being measured is electrically connected only to the voltage monitoring device. The voltage value of each battery is recorded against a battery identifier and a time stamp. The recorded voltage values are output. In an event that a recorded voltage value is below a threshold voltage, a low voltage notification is not provided.

[Continued on next page]

WO 2024/238081 A1

MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, CV,
GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST,
SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ,
RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ,
DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE,
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*