

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2007 (11.10.2007)

PCT

(10) International Publication Number
WO 2007/113829 A2

(51) International Patent Classification:
B65D 1/22 (2006.01)

(74) Agent: **FRIEDMAN, Mark**; 7 Jabotinsky Street, 52520
Ramat Gan (IL).

(21) International Application Number:
PCT/IL2007/000435

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 10 April 2007 (10.04.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
174853 6 April 2006 (06.04.2006) IL
178370 28 September 2006 (28.09.2006) IL

(71) Applicant (*for all designated States except US*): **POLY-MER LOGISTICS B.V.** [NL/NL]; V. Konijnenburgweg 99A, V. KONIJNENBURGWEG 99A, NL-4612 PL Bergen Op Zoom (NL).


(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **HADAR, Nir** [IL/IL]; 60990 Shafayim (IL).

[Continued on next page]

(54) Title: FOLDING CONTAINER WITH ELASTICALLY SUSPENDED FLOOR

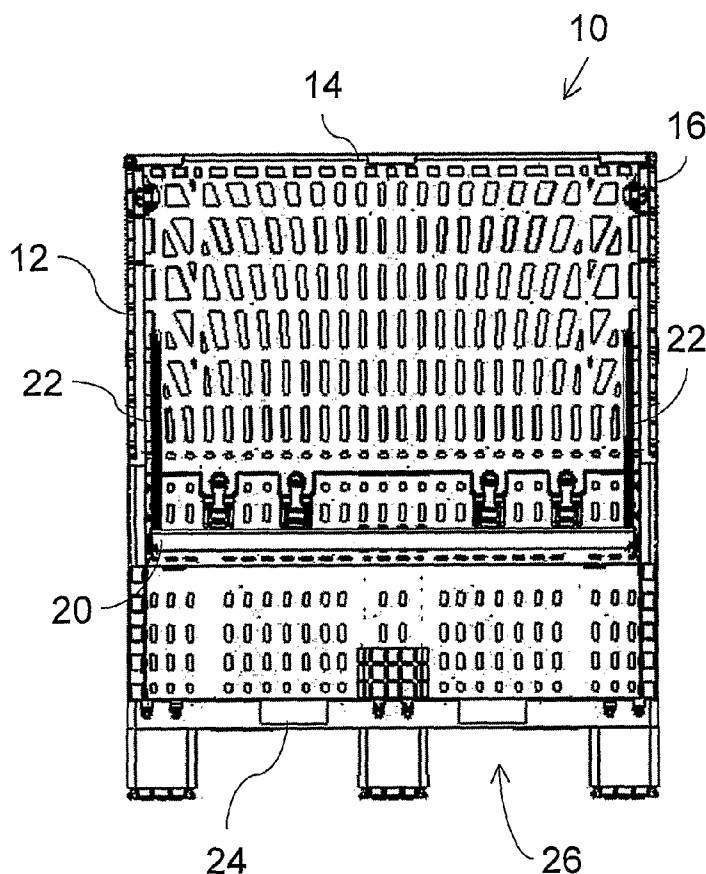

(57) Abstract: A container (10, 30) has a floor (20) for supporting produce suspended via elastic suspension elements (22) from the walls (12, 14, 16, 18) of the container so as to automatically adjust the height of the floor, and hence of the produce, as a function of the weight of the produce within the container. Optionally, an adjustment mechanism (32) is provided to allow adjustment of an effective length of the elastic suspension elements (22).

**Published:**

- *without international search report and to be republished upon receipt of that report*
- *the filing date of the international application is within two months from the date of expiration of the priority period*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.