

2003009313

07/02/03



162162

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number
WO 02/18822 A3

- (51) International Patent Classification⁷: **F16K 11/10**, 17/04, 15/02 (74) Agents: **KING, Timothy, J.** et al.; Mykrolis Corporation, One Patriots Park, Bedford, MA 01730 (US).
- (21) International Application Number: PCT/US01/26719 (81) Designated States (*national*): JP, KR, SG, US.
- (22) International Filing Date: 28 August 2001 (28.08.2001) (84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/229,213 31 August 2000 (31.08.2000) US
- (71) Applicant (*for all designated States except US*): **MYKROLIS CORPORATION** [US/US]; One Patriots Park, Bedford, MA 01730 (US).
- (72) Inventor; and (75) Inventor/Applicant (*for US only*): **GASHGAE, Ira** [IR/US]; 5 High Rock Circle, Waltham, MA 02451 (US).
- (88) Date of publication of the international search report: 23 May 2002
- Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: MODULAR TWO WAY CHECK VALVE CONSTRUCTION

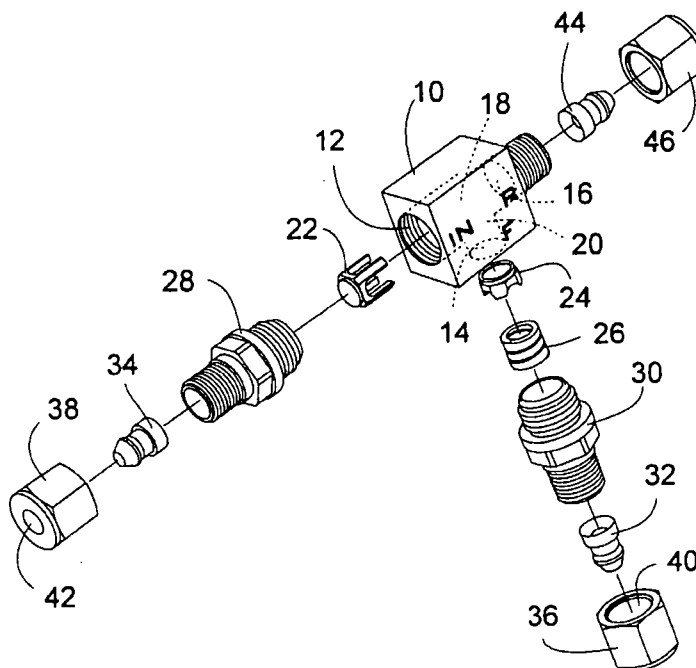

(57) Abstract: A check valve construction is provided which includes a housing having a first flow path and a second flow path. Liquid flow is controlled within the first and second flow path by movable plungers (22, 24) having a sealing surface and a plurality of prongs that control the length of movement of the plunger within the housing. One of the plungers permits liquid flow while the other of the plungers prevents liquid flow in response to pressure change within the flow paths.

WO 02/18822 A3



ACTION