



(51) International Patent Classification:
F28D 7/16 (2006.01) *F28F 9/22* (2006.01)
F28F 9/013 (2006.01)

(21) International Application Number:
PCT/US2009/006093

(22) International Filing Date:
12 November 2009 (12.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/269,193 12 November 2008 (12.11.2008) US

(71) Applicant (for all designated States except US):
**EXXONMOBIL RESEARCH AND ENGINEERING
COMPANY** [US/US]; 1545 Route 22 East, P.O. Box
900, Annandale, NJ 08801-0900 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WANNI, Amar, S.**
[US/BE]; Riemstraat 16, Bus 1031, B-2000 Antwerpen
(BE).

(74) Agents: **PURWIN, Paul, E.** et al.; Exxonmobil Research
And Engineering Company, 1545 Route 22 East, P.O.
Box 900, Annandale, NJ 08801-0900 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT,
TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DISPLACEABLE BAFFLE FOR A HEAT EXCHANGER AND METHOD FOR REDUCING VIBRATION OF THE SAME

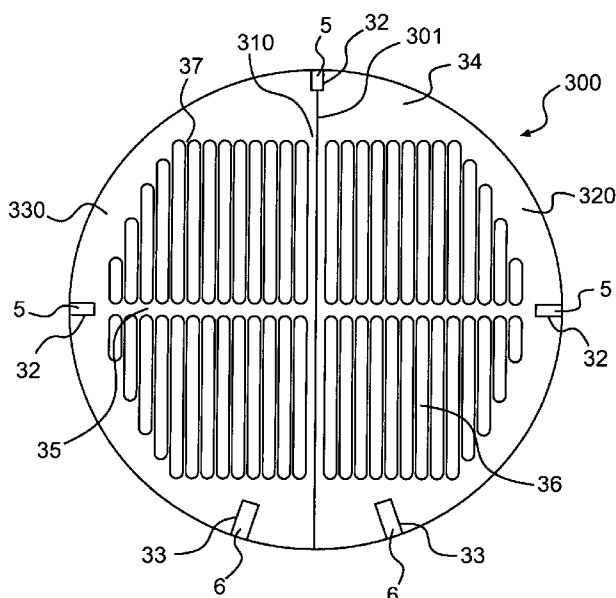


FIG. 2

(57) Abstract: A tube bundle device having at least one displaceable baffle which supports the tubes in the bundle device is disclosed in order to reduce tube vibration. The displaceable baffle includes at least two displaceable portions, which can be moved to installed position such that tubes in a tube bundle are deflected.



Published:

— *with international search report (Art. 21(3))*

— *with amended claims (Art. 19(1))*