

AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING EXTENDED DATA SERVICES

5 The present invention relates to the processing of
auxiliary video information that may be present in a video signal
during vertical blanking and overscan intervals. A video signal
typically includes vertical display intervals, or fields, having a
plurality of horizontal line intervals, e.g. 262.5 lines per field in
10 NTSC video systems. The beginning of each vertical and horizontal
interval is identified by respective vertical and horizontal sync
pulses that are included in a composite video signal. A portion of
each vertical interval is a vertical blanking interval that is not
normally intended for display. In addition, several line intervals
15 adjacent to the vertical blanking period may be within an
overscan region of a video display and will not be visible.

 The lack of image information intended for display
during blanking and overscan intervals makes it possible to insert
an auxiliary information component, e.g. teletext or closed caption
20 (CC) data, into these intervals. Closed caption data represents
speech or other sounds in the audio portion of the video program.
The closed caption data is displayed in a portion of the video
display simultaneously with the corresponding video program
display to serve as an aid for hearing impaired viewers.
25 Standards such as Federal Communications Commissions (FCC)
Regulations define the format for each type of auxiliary
information including the location of the information within a
vertical interval. For example, the present closed captioning
standard (see e.g. 47 CFR §§ 15.119 and 73.682) specifies a closed
30 caption signal must occur during line 21 of field 1 in the format
shown in Figure 1.

 Referring to Figure 1, the closed caption signal includes
a run-in clock (RIC) signal that occurs during the first half of line
21. The RIC signal is used as described below to facilitate the
35 extraction of the closed caption data that occurs during a data
interval in the last half of line 21. A signal transition at the

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 2 -

beginning of a "start bit" interval shown in Figure.1 indicates the beginning of the data interval. The start bit interval is followed by a signal during the remainder of the data interval that represents 16 bits of binary information. Each of the start bit and binary bit intervals is approximately 2 μ s in duration. The 16 binary bits represent two 8-bit character codes in the case of closed caption data. Each character code includes a 7-bit ASCII code and a parity bit.

The FCC standard further specifies that the closed caption signal may include two "channels" of closed caption data designated C1 and C2, and two "channels" of text data designated T1 and T2. Whether data in the closed caption signal is associated with C1, C2, T1, or T2 is determined by control codes that are included in the data. These control codes are listed at 47 CFR §15.119. Two channels of closed caption data make it possible to provide closed captioning in two languages. For example, captioning in English is on C1 and captioning in Spanish is on C2. Because speech is not continuous in a video program, the second language information can be inserted into the closed caption signal during intervals when speech is not occurring. The T1 and T2 text channels provide similar dual-language capability for the display of text that may be unrelated to the audio portion of the video program.

United States law requires that all television receivers 13 inches and larger in size that are sold in the U.S. after 1 July 1993 must be capable of decoding a closed caption signal (see 47 CFR §15.119). This requirement adds to the cost and complexity of most televisions. Many television users, particularly individuals who are not hearing impaired, may not wish to utilize the closed caption capability. Thus, television manufacturers must invest in the development of a feature that is of value to only a limited number of individuals who purchase televisions. In addition, many individuals will be compelled to pay for a feature that is of little or no value to them.

The embodiment of the present invention concerns a system for processing auxiliary video signals that provides for

This Sheet Has Been Replaced

SUBSTITUTE SHEET

- 3 -

decoding an extended data services (EDS) signal in line 21 of field 2. The EDS signal is transmitted in addition to closed caption information. Extended data services provide a general purpose video system information and control capability. Extended data services information is arranged in packets of data. Each packet provides information regarding current or future video programs, the source of the video program, and miscellaneous information such as time of day. The extended data services data may be decoded to control the operation of a video system including a videocassette recorder (VCR) and a television receiver.

The invention may be better understood by referring to the drawing, in which:

Figure 1 shows an example of an auxiliary video data signal such as a closed caption or extended data services signal:

Figure 2 shows, in block diagram form, a portion of a video signal processing system incorporating a closed caption/extended data services decoder constructed in accordance with an aspect of the invention;

Figure 3 shows a flowchart illustrating the operation of the system shown in Figure 2;

Figure 4 shows an example of the interleaving of closed caption and extended data services data; and

Figure 5 shows, in block diagram form, a portion of a video signal processing system for generating a video signal including extended data services information.

An extended data services (EDS) signal exhibits the same format as the closed caption (CC) signal format that is shown in Figure 1 and described above. However, an EDS signal occurs during line 21 of each field 2 interval. EDS data provides a variety of information in addition to closed caption information. For example, EDS data may identify a particular current or future program and provide information such as the duration, title, and content of the program. This information may be captured by the video receiver and displayed in response to activation by a user.

As an example, a user selecting a program that is in progress may identify the program by causing the title that is extracted from

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 4 -

EDS data to be displayed. Alternatively, the a video recorder can be programmed with EDS data to record a particular program.

A decoder shown in Figure 2 decodes CC and EDS data from a video signal. The decoder may be part of a video signal processing integrated circuit. In Figure 2, composite video signal VIDEO is input to data slicer 200. Data slicer 200 converts closed caption and extended data services information in analog signal VIDEO into serial digital data in signal SERDAT. Data slicer 200 may be implemented, for example, using a comparator that compares the level of signal VIDEO to a threshold level during the data interval in the last half of the line 21 interval (see Figure 1). The threshold level in data slicer 200 is referred to as the slicing level. Logic 0 and logic 1 levels in signal SERDAT represent levels of signal VIDEO that are less than and exceed, respectively, the slicing level.

The accuracy of data slicing is improved if the slicing level is approximately 50% of the amplitude of the data signal in the last half of the line 21 interval. The run-in clock (RIC) signal in the first half of the line 21 interval (see Figure 1) may be used to adapt the slicing level to the data signal amplitude. For example, setting the slicing level to the average of the RIC signal amplitude provides an appropriate slicing level because FCC requirements specify that the amplitude of the RIC signal is the same as the data signal amplitude.

The CC or EDS data in signal SERDAT is clocked serially into shift register 210 by a clock signal SERCLK. Signal SERCLK is generated by timing signal generator 220 during the data interval within line 21, i.e., the latter portion of line 21 in which the information representing the 16 data bits occurs (see Figure 1). Generator 220 determines when line 21 is present in signal VIDEO by counting horizontal lines in the video signal as indicated by horizontal sync pulses in signal VIDEO. The horizontal line count is initialized at the beginning of a video field as indicated by the vertical blanking intervals in signal VIDEO. A sync separator is included in generator 220 to produce a separated sync signal from composite video signal VIDEO that provides the required

This Sheet Has Been Replaced

SUBSTITUTE SHEET

- 5 -

horizontal and vertical synchronization information.

Alternatively, as shown in Figure 2, signals VERT and HOR from deflection circuitry in a video system could be used for synchronization.

5 The 16 bits of data in register 210 are designated bits 0 to 15 in Figure 2. Bits 7-0 represent the first CC or EDS character, CHAR#1, and bits 15-8 represent the second character, CHAR#2. Bits 15 and 7 are the parity bits of the respective characters. The serial data in register 210 is converted to parallel data via 16
10 parallel outputs from register 210. The parallel data is output to other units in the video system such as an on-screen-display (OSD) processor (not shown in Figure 2) for generating signals to display closed captioning data and certain types of EDS data (e.g., program title). The parallel data in CHAR#1 and CHAR#2 is also
15 coupled to processing unit 230 for decoding of EDS information.

 The format of EDS information is explained in detail below. Briefly, EDS information is arranged in packets of information. Each packet includes a plurality of 8-bit characters from a plurality of occurrences of line 21 of field 2. Each packet
20 represents a complete piece of information that includes both control and data characters.

 The control characters identify a particular EDS control function (e.g., start packet, continue packet, or end packet) in a manner that distinguishes EDS information from closed caption
25 information. Because CC data is in line 21 of field 1 and EDS data is in line 21 of field 2, it would appear that distinguishing field 1 from field 2 is sufficient to distinguish CC data from EDS data. However, closed caption service may be improved in certain
30 instances by expanding closed caption data service to line 21 of both fields 1 and 2. For example, the bandwidth of channels C1 and C2 in line 21 of field 1 may be insufficient to provide dual language capability for very rapid speech. Additional bandwidth is provided by defining channels C3 and C4 of closed captioning in
35 line 21 of field 2. Similarly, additional text channels T3 and T4 may be defined in line 21 of field 2. If closed captioning can occur in line 21 of field 2, the EDS data must be distinguishable from

This Sheet Has Been Replaced

SUBSTITUTE SHEET

- 6 -

closed caption information. This is accomplished as described below by the choice of EDS control characters.

EDS control characters also indicate the class and type of information included in a packet. Packet class designations indicate general classifications of the information included in a packet. For example, a packet class indicates whether the packet contains information pertaining to a future program, the current program, the source of a program (e.g., the broadcast network), or miscellaneous information (e.g., time of day). Each packet class encompasses a plurality of specific types of information. In addition to packet class, EDS control characters also identify the particular type of information in a packet. For example, a packet type of "program title" within the "current program" class indicates that the data characters in the packet represent the title of the current program.

EDS packets may be transmitted repeatedly by the video signal source by making use of all occurrences of line 21 in field 2 that are not being used for other purposes such as closed caption or text data. For example, the current program title might be retransmitted every 2 minutes to ensure that a user can access current program title information with relatively little delay. Other information such as future program data might be transmitted at less frequent intervals or when changes to the program schedule occur.

In Figure 2, processor 230 includes decoder 233 for detecting and decoding EDS information. The decoding process in decoder 230 is controlled by control unit 233. When line 21 ends as indicated by signal LINE21 from timing generator 230, new character data is present in register 210. If the current video field is field 2, as indicated by signal FIELD from timing generator 230 being at logic 1, the new character data in register 210 may be EDS data. Control unit 233 responds to signals FIELD and LINE21 by generating signal EDCTRL to initiate the decoding process in decoder 235.

Decoder 235 first tests the CHAR #1 code to determine if the character data is EDS data. If CHAR #1 is an EDS control

This Sheet Has Been Replaced



SUBSTITUTE SHEET

code, decoder 235 proceeds to decode the EDS control information. If CHAR #1 is neither an EDS control code nor a closed caption control code, and the immediately preceding occurrence of line 21 in field 2 included EDS data, the current CHAR #1 code is

- 5 processed as EDS data. If CHAR #1 is neither an EDS control code nor a closed caption control code, and the immediately preceding occurrence of line 21 in field 2 included closed caption data, the current CHAR #1 code is processed as closed caption data.

- 10 If CHAR #1 is an EDS control code, CHAR #1 is decoded to establish the EDS packet function (i.e. start, continue, end) and packet class. As described below, if CHAR #1 indicates "packet start", the CHAR #2 code represents the packet type. The decoded function, class, and type information is communicated to control unit 233 from decoder 235 via signals PFUNC, PCLASS, and PTYPE.
15 respectively. EDS data characters follow "start", "type", and "continue" control characters. Control unit 233 causes the decoded packet control information and data characters to be stored in memory 237 until a complete packet is received as indicated by the EDS control code for the "end packet" function.

- 20 The "end packet" control code in CHAR #1 is followed in CHAR #2 by a "checksum" value that is tested in decoder 235 to evaluate whether the data in the packet is error free. If the packet data is error free, subsequent decoding and storage of the packet data that is indicated by the packet class and type
25 information is completed. If the checksum evaluation indicates that the packet data includes an error, the packet data is ignored and a subsequent retransmission of the packet will be captured to provide the correct data.

- Decoder 235 generates system control signals SYSCTRL
30 for controlling the aspects of the video system in response to the EDS information. For example, a video cassette recorder (VCR) may be activated to begin recording or set the correct time of day in response to control signal VCRCTRL from decoder 235. Similarly, a television may be controlled via signal TVCTRL to
35 modify the on-screen display (OSD) processor operation to display closed captioning in response to EDS data indicating the presence

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 8 -

of closed caption services. Processor 230 in Figure 2 also includes capability for detecting and decoding closed caption data. Thus, control signals SYSCTRL also include closed caption control signals coupled to the OSD processor that control the closed caption display.

Processor 230 in Figure 2 may be implemented using a microprocessor. For example, the sequence and control functions of unit 233 could be accomplished with a software control program. Data slicer 200, register 210, and timing signal generator 220 may also be included with the microprocessor function in a single integrated circuit. The operation of an embodiment of the system in Figure 2 including a microprocessor may be better understood by referring to a flowchart shown in Figure 3.

In Figure 3, processing begins at step 300 in Figure 3 when closed caption or EDS processing is enabled by events such as the receiver being turned on or activation of EDS capability by a user (e.g., via a remote control button). Operation pauses at step 310 until a line 21 interval is detected. This indication may be provided, for example, by signal LINE21 in Figure 2. At step 320 in Figure 3, serial data from line 21 is loaded into a data register (e.g., register 210 in Figure 2). Next, the current field is determined at step 325 by, e.g., testing signal FIELD in Figure 2. If the current field is field 1, the data in the data register cannot represent EDS data, and operation continues at step 335 where the register data is processed as closed caption data.

At step 325, if the current field is field 2, operation continues at step 330 where CHAR #1 is evaluated to determine if CHAR #1 is closed caption data in field 2. If CHAR #1 is closed caption data, step 335 is executed where the data is processed as closed caption data. For example, closed caption characters are transferred to an OSD processor for subsequent display. If CHAR #1 is not closed caption data at step 330, CHAR #1 is presumed to be EDS data and operation proceeds to step 340. At step 340, CHAR #1 is tested to determine if CHAR #1 represents an EDS control code. If CHAR #1 is not an EDS control character at step

This Sheet Has Been Replaced

SUBSTITUTE SHEET

- 9 -

340, the character is EDS data that is stored in memory at step 345.

Detection of an EDS control code at step 340 is followed by decoding of CHAR #1 at step 350 to determine the EDS packet function and packet class. Signals PFUNC and PCLASS in Figure 2 are generated at step 350. The packet function is tested further at step 360 to determine whether the packet function indicates the end of the packet. If the function is not "end packet", CHAR #2 is decoded at step 365 to determine the packet type. Signal PTYPE in Figure 2 is generated at step 365. If the end of the packet is detected at step 360, the checksum in CHAR #2 is tested at step 370 to detect errors in the packet data. The packet data is processed further at step 375 if no errors are detected by, for example, decoding control information in the packet data to generate control signals for the system or storing the packet data for later use, such as in the case of program title information. activated by a user.

Following steps 310, 335, 345, 365, 370, and 375 in Figure 3, operation continues at step 380 where the system checks to determine if auxiliary video information (i.e. CC or EDS data) processing remains enabled. If enabled, operation continues by searching for the next occurrence of line 21 at step 310. If disabled, the procedure in Figure 3 is exited at step 390.

The described system processes auxiliary video information formatted in a predetermined manner to facilitate determining whether the information in line 21 is closed caption or EDS information. An exemplary EDS data formatting specification suitable for use with the embodiment depicted in Figure 2 is described below.

30

1. General EDS Data Format Information

The encoding of information for the extended data services (EDS) follows the same general format as for closed caption data encoding. This scheme consists of pairs of characters transmitted in the same field. The characters can be either a

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-10-

control code pair or a data pair. The first byte of the pair determines whether the pair is a control pair or a data pair. If the first byte is in the range of 01h to 0Fh, the pair is a control pair. These values are not defined for captioning or text transmission.

- 5 Upon receiving such a control code pair, the decoder would recognize subsequent data as EDS data. This is the same scheme that is used when decoding a closed caption signal to differentiate between caption and text mode, and between operating channel 1 and operating channel 2 (i.e. C1 and C2) of the caption signal. All
10 characters are transmitted using odd parity. This is consistent with the closed caption conventions, and allows for simpler encoding/decoding hardware and software.

- There are four varieties of EDS characters: Control, Type, Data, and Checksum. These characters may be transmitted
15 in the combinations shown in Table 1.

Table 1

1 st Byte	2 nd Byte
Control	Type
Control	Data
Data	Data
Control	Checksum

- 20 As described above, the Control byte is in the range of 01h to 0Fh. The Type and Checksum bytes are in the range of 00h to 7Fh. The data byte is in the range of 10h to 7Fh for ASCII data, or in the range of 40h to 7Fh for Non-ASCII data. A Data byte of 00h is a null byte, and is always ignored.

- 30 A packet of EDS data is defined to be a collection of these pairs of bytes which conveys a complete piece of information. Each byte of EDS data is associated with a packet of data. A sub-packet is defined to be a control pair followed by some number, maybe zero, of data pairs. A data field is defined to be some number of bits within a Data byte. Each sub-packet may
35 be transmitted independently and surrounded by other information. Note that a full packet could be transmitted using

This Sheet Has Been Re



SUBSTITUTE SHEET

- 11 -

only control pairs, or by also using data pairs for more throughput when possible.

There are three categories of Control bytes: Start, Continue, and End. The Start code indicates the beginning of a new packet. The Continue code indicates the following data is part of the packet which began with the last Start code. The End code indicates the packet is finished. The Type byte always follows the Start code to indicate the type of data contained in the new packet. The Checksum byte always follows the End code and is used for error detection.

Once a packet has been started, the data for the packet can be sent one byte at a time by using a Continue code with each byte to create a separate sub-packet for each byte. Each subpacket occurs during a single instance of line 21. For higher throughput, both bytes during a particular line 21 interval may contain data. In this case, a sub-packet includes data from a plurality of line 21 intervals. The data in a particular line 21 interval belongs to the sub-packet which began with the last Start or Continue code. The transmission of data pairs can not be interrupted by any other information. If it is necessary to interrupt the transmission of data pairs, the transmission of the packet is reestablished by sending a Continue control pair. The example shown in Table 2 illustrates the described process.

Table 2

1 st Byte	2 nd Byte
... other ...	... other ...
Start	Type
Data	Data
... other ...	... other ...
Continue	Data
Data	Data
Data	Data
... other ...	... other ...
Continue	Data
... other ...	... other ...
End	Checksum
... other ...	... other ...

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 12 -

The described approach will allow broadcasters the flexibility to simultaneously use any combination of captions or text using either C1 or C2, and EDS. It also permits the efficient transmission of EDS information if it is the only service offered on field two of the video signal.

There are four classes of packets currently defined: Current, Future, Network, and Miscellaneous. The Current packet contains information describing the program currently being transmitted. The Future packet contains information about an upcoming program to be transmitted. The Network packet contains information about the source of the video signal, e.g the broadcasting network. The Miscellaneous packet contains a variety of other useful information. Table 3 shows the assignment of these packet classes to their respective control codes.

Table 3

Control Code	Function
01h	Current Start
02h	Current Continue
03h	Current End
04h	Future Start
05h	Future Continue
06h	Future End
07h	Network Start
08h	Network Continue
09h	Network End
0Ah	Misc. Start
0Bh	Misc. Continue
0Ch	Misc. End
0Dh	Reserved
0Eh	Reserved
0Fh	Reserved

The transmission of one class of packet may be interrupted by another class of packet because each of the four packet classes has its own group of control codes. As a result, higher priority information can interrupt lower priority information. For example, information about the current program is probably more time critical than is information regarding a future program. A complete packet of "current" information might be sent in the middle of transmitting a packet of "future"

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 13 -

information. Thus, single fields of lower priority information can be inserted when unused line 21 intervals are available.

However, a packet can only be interrupted by a packet of a different class. This ensures that packets can be "nested" without
5 confusion regarding which packet data is to be associated with when a "continue" control code is issued.

Each packet conveys one piece of information. The first byte of the control code pair that begins a packet (i.e. "start" control code) determines the packet class as shown in Table 3.

10 The type of information contained in the packet is determined by the Type code in byte two of the Start control code pair. The data bytes associated with a packet are held in temporary storage until the entire packet has been received and the checksum at the end of the packet has been validated. This prevents stored data from
15 being corrupted, and also permits a packet to be aborted in the middle by starting a new packet of the same class.

The data types included in Current and Future packet classes are identical, i.e. the Type designations for both packets is the same. The difference between the Current and Future classes
20 is the "object" of the data, i.e. "current" or "future" program. Any information regarding the current program which can be transmitted via EDS can also be sent in regard to a future program, and vice versa. The data contained in the Future packet always pertains to the "future" program that was most-recently
25 specified in the EDS information. The future program is specified by sending a program identifier as the Type code in a Future packet. This Type code indicates which future program all transmitted information is to pertain to until another program identifier Type code is sent. Similarly, the information in the
30 Current packet class always pertains to the program currently being transmitted. When a new program identifier is sent in a Current packet, the old program has finished and the newly specified program is beginning.

The data which constitutes the program identifier is
35 simply the scheduled broadcast time, date, and receiver channel number. This has the advantage of being a compact, simple to

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 14 -

calculate, and unique identifier for each program broadcast on a given channel per year. Even if the broadcast of a program is delayed, it should still carry its originally scheduled time as its program identifier data throughout its entire broadcast. This will allow the recording of programs which are delayed or run longer than expected. All time and date specifications, including current time and date, are always given as Greenwich Mean Time (GMT). Providing both the start time of a future program and the current program identifier as GMT ensures that the identification of a desired program will be independent of the viewer's time zone and "daylight saving" time status. This permits correct recording, e.g. in a video cassette recorder (VCR), even if the viewer does not tell his VCR what time zone he is in. The only purpose for specifying the viewer's time zone and daylight saving status is to display the correct local time given the broadcast time as GMT.

2. Current and Future Packet Classes

Table 4 shows the assignment of Type codes in the Current and Future packet classes.

Table 4

Type Code	Function
00h	Unidentify Program
01h	Program Identifier
02h	Erase Program
03h	Stop Time
04h	Program Title
05h	Program Audience
06h	Program Type
07h	Audio Services
08h	Caption Services
09h	-undefined-
0Ah	-undefined-
78h	Description 8
7Fh	Description 1

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 15 -

2.1 "Unidentify Program" Packet Type

This packet contains zero bytes, but indicates the program is to be unidentified. It has the opposite effect of the program identifier packet. When received, all subsequent packets of this class will be ignored until another program identifier is received. This could be used as a signal that the specified program information has all been sent.

2.2 "Program Identifier" Packet Type

This packet contains either four or six bytes which define a program start time and date, relative to Greenwich Mean Time, and receiver channel number. The format of each byte is shown in Table 5. Note that bit #6 in each byte is always set to logic 1 because the information in each byte is not ASCII data. Also, note that the bit #7 (bit b7) is not shown in Table 5, or other tables below, because bit #7 of each byte is a parity bit.

Table 5

Data	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
minute	1	m ₅	m ₄	m ₃	m ₂	m ₁	m ₀
hour	1	T	h ₄	h ₃	h ₂	h ₁	h ₀
day	1	D	d ₄	d ₃	d ₂	d ₁	d ₀
month	1	Z	L	m ₃	m ₂	m ₁	m ₀
channel	1	c ₅	c ₄	c ₃	c ₂	c ₁	c ₀
channel	1	s ₁	s ₀	--	--	c ₇	c ₆

The minute data field has a valid range from 0 to 59, the hour field from 0 to 23, the day field from 1 to 31, and the month field from 1 to 12. The "D" bit determines if daylight saving time is currently being observed throughout the country. The "L" bit determines if the current year is a leap year. The "Z" bit determines if the current time in seconds should be reset to zero. The "D", "L", and "Z" bits are ignored by the decoder when processing this packet (see the description of the "time of day"

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 16 -

Type code assignment in the section below that pertains to the Miscellaneous packet class). The "T" bit is processed as part of the program identifier packet to determine if the program is subject to a local tape delay. Even if the broadcast of a program is delayed, it should still carry its originally scheduled time as its program identifier data throughout its entire broadcast.

The "channel" data field is an optional two-byte field having a valid range from 0 to 255. If the channel field is omitted, the receiver channel will default to the currently tuned channel. The channel field allows one channel to specify information for another channel. The channel data field contains a two bit subfield which specifies the source input. The source subfield has a valid range from 1 ($S_1S_0 = 00$) to 4 ($S_1S_0 = 11$) that can be used in a multi-wire cable system to specify the cable line.

2.3 "Erase Program" Packet Type

This packet contains zero bytes, but indicates the specified program data is to be completely deleted. This will be most useful for the Future packet class.

2.4 "Stop Time" Packet Type

This packet contains either zero or four bytes which define a program stop time and date relative to Greenwich Mean Time. If the packet contains zero bytes, the existing stop time will be erased. The format of the bytes is the same as for the "program identifier" packet described above in section 2.2 except that no channel data is needed. The "D", "L", and "Z" bits are also ignored by the decoder when processing this packet as described in section 2.2.

2.5 "Program Title" Packet Type

This packet contains a variable number, 0 to 32, of bytes which define a program title. If the packet contains zero

This Sheet Has Been Replaced

SUBSTITUTE SHEET

- 17 -

bytes, the existing program title will be erased. Each byte is an ASCII character in the range of 20h to 7Fh. The variable size of this packet allows for efficient transmission of titles of any length. No "size" indicator byte is needed because the End control code pair is used to terminate the packet.

2.6 "Program Audience" Packet Type

This packet contains a variable number of bytes, namely zero to three, which define the intended audience for the program. If the packet contains zero bytes, the existing program audience will be erased. For any data bytes in this packet, bit #6 is set to logic 1 because the data is not ASCII data. The format of the data bytes is shown in Table 6.

Table 6

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	M	W	S	A	T	C
1	D	--	V	L	N	A
1	q_2	q_1	q_0	r_2	r_1	r_0

The data bytes in this packet must be sent in the order shown in Table 6. Table 7 defines the function of the bits for bytes one and two shown in Table 6.

Table 7

Byte One		Byte Two	
C	Children	A	Adult Situations
T	Teens	N	Nudity
A	Adults	L	Language
S	Seniors	V	Violence
W	Women	--	undefined
M	Men	D	Data Services

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-18-

Bit definitions may be selected from the list in Table 7 in any combination that is needed to communicate the desired information. Byte one indicates the target audience. For example, to specify a program as suitable for the entire family, all bits in byte one would be set. Byte two indicates why the target audience may have been restricted from the entire family.

Byte three in Table 6 contains data fields representing program quality and rating information for movies. The format for byte three is shown in Table 8.

Table 8

q_2 q_1 q_0	Quality	r_2 r_1 r_0	Rating
0 0 0	Unknown	0 0 0	Unknown
0 0 1	*	0 0 1	G
0 1 0	$\frac{1}{2}$	0 1 0	PG
0 1 1	**	0 1 1	PG-13
1 0 0	** $\frac{1}{2}$	1 0 0	R
1 0 1	***	1 0 1	NC-17
1 1 0	*** $\frac{1}{2}$	1 1 0	X
1 1 1	****	1 1 1	None

2.7 "Program Type" Packet Type

This packet contains a variable number, 0 to N, of bytes which specifies the type of information included in a particular program. The information in this packet could be used by a viewer to selectively look for certain types of programs. If the packet contains zero bytes, the existing program type will be erased. The first two bytes are not ASCII data and, therefore, bit #6 is set to logic 1 in the first two bytes. The third through Nth bytes are ASCII characters in the range of 20h to 7Fh.

The format of the first two bytes is shown in Table 9.

Table 9

b_6 b_5 b_4 b_3 b_2 b_1 b_0
1 N S E E L C
1 f_1 f_0 t_1 t_0 s_1 s_0

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 19 -

The first two bytes must be sent in the order shown in Table 9.

The first byte defines the general category of the information in the program. The type of information indicated by the bits in the first byte is shown in Table 10.

Table 10

C	Classified
L	Life / Style
E	Education
E	Entertainment
S	Sports
N	News

A logic 1 in a bit position shown in Table 9 indicates that the program provides the corresponding type of information listed in Table 10. If necessary, multiple bits can be set to logic 1 to indicate that the program includes multiple categories of information. Byte two provides additional program information as shown in Table 11.

Table 11

t_1, t_0	Format	t_1, t_0	Time Slot	s_1, s_0	Status
0 0	Special	0 0	Once	0 0	Premiere
0 1	Series	0 1	Once Week	0 1	Live
1 0	Mini-Series	1 0	Weekdays	1 0	Tape Delay
1 1	Movie	1 1	Every Day	1 1	Re-Run

Bytes three to N provide additional information which can be used to further specify the type of programming. These bytes are sent as ASCII characters, but the character codes represent the words listed in Table 12.

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-20-

Table 12

Code	Qualifier	Code	Qualifier	Code	Qualifier
20h	Unknown	40h	Gymnastics	60h	Singing
21h	Action / Adventure	41h	Health	61h	Skating
22h	Amateur	42h	Hobby	62h	Skiing
23h	Animated	43h	Hockey	63h	Soap Opera
24h	Arts	44h	Home	64h	Soccer
25h	Auto	45h	Horror	65h	Special
26h	Awards	46h	Hunting / Fishing	66h	Talk
27h	Baseball	47h	Improvement	67h	Tennis
28h	Basketball	48h	Informational	68h	Text
29h	Bowling	49h	Instructional	69h	Track / Field
2Ah	Boxing	4Ah	Investment	6Ah	Travel
2Bh	Business	4Bh	Legal	6Bh	Variety
2Ch	Cartoon	4Ch	Local	6Ch	Video
2Dh	Classical	4Dh	Medical	6Dh	Volleyball
2Eh	Comedy	4Eh	Military	6Eh	War
2Fh	Commercial	4Fh	Musical	6Fh	Weather
30h	Computer	50h	Mystery / Suspense	70h	Western
31h	Concert	51h	National	71h	World
32h	Contemporary	52h	Nature	72h	Wrestling
33h	Criminal	53h	Opinion	73h	special 1
34h	Dancing	54h	Performing	74h	special 2
35h	Diving	55h	Personal	75h	special 3
36h	Documentary	56h	Political	76h	special 4
37h	Drama	57h	Professional	77h	special 5
38h	Erotica	58h	Public	78h	special 6
39h	Fantasy	59h	Racing	79h	special 7
3Ah	Fiction	5Ah	Religious	7Ah	special 8
3Bh	Financial	5Bh	Romance	7Bh	special 9
3Ch	Football	5Ch	Sales	7Ch	special 10
3Dh	Fund Raiser	5Dh	Science	7Dh	special 11
3Eh	Game / Quiz	5Eh	Service	7Eh	special 12
3Fh	Golf	5Fh	Shopping	7Fh	Other

The bytes listed in Table 12 may be used in whatever combination is necessary to specify the desired level of information regarding the type of programming. However, multiple bytes should be sent in proper grammatical order. In addition, it should be noted that receivers may impose limitations on the number of bytes that will be recognized.

The byte designated "Unknown" in Table 12 is the default value if no other bytes from Table 12 are included in the Program Type packet. The twelve "special" bytes listed in Table 12 may be defined by each network to best suit individual

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 21 -

programming needs (see the Type code assignments for "special qualifiers" in the section below that describes the Network packet class). The byte designated "Other" in Table 12 indicates that the type of programming is known and does not fit into any of the defined programming types. All twelve of the "special" bytes listed in Table 12 implicitly include the "Other" designation.

2.8 "Audio Services" Packet Type

This packet contains either zero or two bytes which define the contents of the main and second audio programs that are associated with the video signal. If the packet contains zero bytes, existing audio services information will be erased. Bit #6 is set to logic 1 in the data bytes in this packet because the data bytes are not ASCII data. The format of the bytes is shown in Table 13.

Table 13

Data	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
main	1	t ₂	t ₁	t ₀	t ₂	t ₁	t ₀
sap	1	t ₂	t ₁	t ₀	t ₂	t ₁	t ₀

Each of the two bytes listed in Table 13 contains two data fields: language and type. The language field of each byte represents the languages listed in Table 14.

Table 14

t ₂	t ₁	t ₀	Language
0	0	0	Unknown
0	0	1	English
0	1	0	Spanish
0	1	1	French
1	0	0	German
1	0	1	Japanese
1	1	0	Other
1	1	1	None

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-22-

The type field of each byte listed in Table 13 is encoded to represent the information shown in Table 15.

Table 15

Main Audio Program				Second Audio Program			
t_2	t_1	t_0	Type	t_2	t_1	t_0	Type
0	0	0	Unknown	0	0	0	Unknown
0	0	1	Mono	0	0	1	Mono
0	1	0	Simulated Stereo	0	1	0	Descriptive Video Service
0	1	1	True Stereo	0	1	1	Non-program Audio
1	0	0	Stereo Surround	1	0	0	Special Effects
1	0	1	Data Service	1	0	1	Data Service
1	1	0	Other	1	1	0	Other
1	1	1	None	1	1	1	None

2.9 "Caption Services" Packet Type

This packet contains a variable number, 0 to 8, of bytes which define the available forms of caption encoded data.

If the packet contains zero bytes, existing information regarding caption serves will be erased. One byte is included to specify each available service. Bit #6 is set to logic 1 in each byte because the data is not ASCII data. Each of the bytes is in the format shown in Table 16.

Table 16

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	l_2	l_1	l_0	F	C	T

The language data field (L_2 - L_0 in Table 16) is encoded using the same format as for the audio services packet described in section 2.8 above. The "F" bit determines if the data is in TV field one ("F" = 0), or in field two ("F" = 1). The "C" bit determines if the data is in channel C1 ("C" = 0), or in channel C2 ("C" = 1). The "T" bit determines if the data is captioning ("T" = 0), or text

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-23-

("T"=1). This information permits the broadcaster to completely specify the line 21 services that are available.

2.10. "Undefined" Packet Types

5

Type Codes 09h and 0Ah in Table 4 are undefined. These type codes may be defined in the future to further expand EDS capability. For example, one of the undefined type codes might be allocated to provide information regarding video

10 "scrambling". Various approaches are used for encoding, or scrambling, a video signal to prevent viewing by unauthorized users, e.g. "pay-per-view" programming. Information regarding the type of scrambling might be useful to permit authorized users to more effectively decode the scrambled signal.

15

Another possible use for the undefined codes is to provide information regarding the aspect ratio of the video image in a program. Aspect ratio information would permit the system to select only certain aspect ratio programs. Alternatively, the video receiver could use the aspect ratio information to adapt the

20 signal to the particular display screen aspect ratio of the video receiver.

2.11. "Description 'N'" Packet Type

25

These packets each contain a variable number, 0 to 32, of bytes which, when combined together, form a description of the program. If the packet contains zero bytes, the existing line of description information will be erased. Each byte is an ASCII character in the range of 20h to 7Fh. Each packet of this type

30 provides one line of a multiple line description of the program. The description can contain any information the service provider chooses including: episode title, date of release, cast of characters, brief story synopsis, etc. By varying the number of packets of Description "N" type, efficient transmission of program

35 descriptions of any length is possible.

This Sheet Has Been Replaced



SUBSTITUTE SHEET

3. Network Packet Class

Table 17 lists the assignment of Type codes for the Network packet class.

5

Table 17

10

Type Code	Function
00h	Unidentify Network
01h	Network Identifier
02h	Erase All Programs
03h	Network Name
04h	Call Letters
05h	Native Channel
06h	Tape Delay
07h	Special Qualifier 1
.	.
12h	Special Qualifier 12

15

3.1. "Unidentify Network" Packet Type

20

This packet contains zero bytes and indicates that the network is to be "unidentified". The effect is opposite to that of the "network identifier" packet (see section 3.2 below). After this packet is received, all subsequent packets of the Network class will be ignored until a network identifier packet is received. This packet type can be used as a signal that all network information has been sent.

25

3.2. "Network Identifier" Packet Type

30

This packet contains either zero or two bytes which define a receiver channel number for which network information is to be specified. The format of the bytes is the same as for the channel data field shown in Table 5 in section 2.2 above. The two byte channel field is optional. The receiver channel will default to the currently tuned channel if not specified. This field allows one channel to specify information for another channel.

35

This Sheet Has Been Replaced



3.3. "Erase All Programs" Packet Type

5 This packet contains zero bytes, but indicates all of the program information for the specified network is to be completely deleted.

3.4. "Network Name" Packet Type

10 This packet contains a variable number, 0 to 32, of bytes which define the name of the broadcasting network. If the packet contains zero bytes, the existing network name is erased. Each byte is an ASCII character in the range of 20h to 7Fh. Each network should use a single unique name so that receivers can
15 access information regarding the network that is stored internal to the receiver, e.g. a network logo that can be displayed when a network is selected.

3.5. "Call Letters" Packet Type

20 This packet contains a variable number, 0 to 32, of bytes which define the "call" letters of the local broadcasting station. If the packet contains zero bytes, the existing call letters are erased. Each byte is an ASCII character in the range of 20h to
25 7Fh.

3.6. "Native Channel" Packet Type

30 This packet contains either zero or two bytes which define the "native" channel number, i.e. local "over-the-air" broadcast channel number, that is assigned to a station. This information is useful if a cable channel number assigned to a station differs from the station's over-the-air broadcast channel number. If the packet contains zero bytes, the existing native
35 channel number is erased. The format of the bytes is the same as for the channel field listed in Table 5 in section 2.2 above.



3.7. "Tape Delay" Packet Type

This packet contains either zero or one byte which defines the number of half hours the local station routinely tape delays network programs. If the packet contains zero bytes, the existing tape delay information is erased. The data is not ASCII data so bit #6 is always set to logic 1. The format of the data byte in this packet is shown in Table 18.

Table 18

b ₇	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
1	S	d ₄	d ₃	d ₂	d ₁	d ₀	

The delay field (d₄-d₀ in Table 18) has a valid range from 0 to 31, which represents time values from 0 hours and 0 minutes to 15 hours and 30 minutes in 30 minute increments.

The "S" bit is a sign bit, and determines if the delay value is to be added to the expected program start time ("S" = 0) or subtracted from it ("S" = 1). This delay would apply to all programs on the channel which have the "T" bit set in their program identifier information (see Table 5 in section 2.2 above). The delay value defaults to zero if not specified.

3.8. "Special Qualifier 'N'" Packet Type

These packets each contain a variable number, 0 to 32, of bytes which define the text to be associated with the "special" bytes listed in Table 12 that may be used for specifying program information. If the packet contains zero bytes, the text associated with a "special" byte is erased. Each byte in this packet type is an ASCII character in the range of 20h to 7Fh. Each packet provides text for one network specific "special" program information byte. For example, a station which offers mostly sports may define its



first five "special" bytes to represent sports such as: Poker, SCUBA, Hang Gliding, Americas Cup, and Olympics. However, a station which offers mostly music may define its first five "special" bytes to represent types of music such as: Heavy Metal, Rap, Pop, Country, and Disco. The meaning of the "special" bytes can be redefined by the network at any time. If no text is received to define a "special" byte, the byte will default to a single blank space.

10 4. Miscellaneous Packet Class

Table 19 lists the assignment of Type codes for the Miscellaneous packet class.

15

Table 19

20

Type Code	Function
01h	Time of Day
02h	Time Zone
03h	Line Number
04h	No EDS
05h	Single EDS
06h	Directory EDS
07h	Program Pause
08h	Program Resume
09h	Impulse Capture

25 4.1. "Time of Day" Packet Type

This packet contains four data bytes which define the current time of day and date relative to Greenwich Mean Time. The format of the bytes is the same as that shown in Table 5 for the "program identifier" packet (see section 2.2 above), except that no channel data is needed. The "D" bit is used to determine if daylight savings time is currently being observed throughout the country. This information, along with the viewer's specified time zone and whether daylight savings time is locally observed, is used to determine the correct local time. Local time is only used

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-28-

to display the local time for the viewer. All internal timers and clocks should be kept in Greenwich Mean Time.

The "L" bit is used to determine if the current year is a leap year. This is needed to determine if the local day is February 28th or 29th when it is March 1st Greenwich Mean Time. The "Z" bit is used to determine if the current time in seconds should be reset to zero. This allows the time of day to be correct without transmitting the full six bits of data to specify the current number of seconds. The "T" bit is used to determine if the program is subject to a local tape delay. If this bit is set, the time of day clock should not be updated.

4.2. "Time Zone" Packet Type

This packet contains one byte which defines the viewer's time zone and daylight savings status. The data is not ASCII data so bit #6 is always set. The format of the single data byte is shown in Table 20.

20

Table 20

b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
1	D	h ₄	h ₃	h ₂	h ₁	h ₀

25

The hour data field (bits h₄-h₀ in Table 20) has a valid range from 0 to 23 and represents the nominal delay in hours relative to GMT. The "D" bit determines if daylight savings time is to be observed. This packet should only be sent when all possible viewers reside in the same time zone.

30

4.3. "Line Number" Packet Type

This packet contains one byte which defines the current line number and field for the tuned channel. This data is

35

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 29 -

not ASCII data so bit #6 is always set. The format of the byte is shown in Table 21.

5

Table 21

b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
1	F	L ₄	L ₃	L ₂	L ₁	L ₀

10

The "line" field (bits L₄-L₀ in Table 21) has a valid range from 7 to 31. The "F" bit determines if the data is in TV field one ("F" = 0) or in field two ("F" = 1).

15 4.4. "No EDS" Packet Type

This packet contains zero bytes and indicates that the tuned channel has no extended data services information available.

20

4.5. "Single EDS" Packet Type

This packet contains zero bytes and indicates that the tuned channel has extended data services information available for a single channel.

25

4.6. "Directory EDS" Packet Type

This packet contains zero bytes and indicates that the tuned channel has extended data services information available for multiple channels. This information would be used to identify a station which provides a continuous directory of information about other channels.

35

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-30-

4.7. "Program Pause" Packet Type

5 This packet contains zero bytes and indicates that the current program on the tuned channel has been interrupted. It will need to be retransmitted at least once per minute to maintain a pause. This is because receivers will time-out after one minute even if no program resume packet is sent.

4.8. "Program Resume" Packet Type

10

This packet contains zero bytes and indicates that the current program on the tuned channel has resumed. It is used to immediately end a program pause. Receivers should perform an automatic program resume if one has not been received within
15 the last minute following a program pause.

4.9. "Impulse Capture" Packet Type

20 This packet contains either zero, eight, or ten bytes which define a program stop time and date, and start time and date, all relative to Greenwich Mean Time, and receiver channel number. If the packet contains zero bytes, existing information regarding impulse capture is erased. The format of the bytes is the same as for the "stop time" (see section 2.4) followed by the
25 "program identifier" (see section 2.2). This packet provides all the information needed to permit a program to be easily recorded. The program identifier bytes follow the stop time bytes because the program identifier contains a variable number of bytes. The "D", "L", and "Z" bits are ignored by the decoder when processing
30 this packet. The receiver channel will default to the currently tuned channel if not specified.

35 The signal format described above may be better understood by referring to Figure 4 which shows an example of the interleaving of CC and EDS data, and the nesting of EDS packets. In Figure 4, the first and second occurrences of line 21 in

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 31 -

field 2 (lines labeled "1" and "2" on the left side of Figure 4) include closed caption or text data. In the third occurrence of line 21 in field 2, packet "A" of EDS data begins with a control code (CHAR #1) and a type code (CHAR #2). The fourth occurrence of line 21 includes EDS data that is part of packet "A". The fifth, sixth, and seventh occurrences of line 21 in field 2 are closed caption data. Because the EDS data at the start of packet A acts as a break in the CC data, the CC data at line 5 in Figure 4 begins with a "resume closed caption" control code to distinguish the closed caption data from the EDS data.

A second EDS packet, labeled packet "B" in Figure 4, begins at the eighth occurrence of line 21 and ends at the tenth occurrence of line 21. Packet "B" is nested within packet "A" which continues at the eleventh occurrence of line 21 with a "continue" control code. Packet "A" ends at the thirteenth occurrence of line 21. The end of packet "A" could be followed by another EDS packet, closed caption data, or "null" characters, i.e., no data.

A video signal including EDS information in the format described above can be generated using the exemplary system shown in Figure 5. Referring to Figure 5, video signal source 510 providing signal SOURCE may be a video tape recorder or video camera. Signals LINE21 and FIELD from unit 510 correspond to signals of the same name in Figure 2 and synchronize the operation of the system in Figure 5 to signal VIDEO. Microprocessor 520 receives EDS and CC input data identified as EDS INPUT and CC INPUT, respectively, in Figure 5 and formats it into serial data signal SERIAL DATA. The CC and EDS input data may be generated, for example, by someone typing CC and/or EDS information such as a program title at a keyboard.

MUX 530 selectively couples either signal SOURCE or signal SERIAL DATA to transmitter 540 in response to signal SELECT from microprocessor 520. Transmitter 540 transmits signal VIDEO over cable or by broadcasting. Output signal VIDEO in Figure 5 corresponds to signal VIDEO in Figure 2. CC and EDS data is inserted into signal VIDEO in Figure 5 by the operation of

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-32-

MUX 530. When CC or EDS data is to be inserted, microprocessor 520 detects an occurrence of line 21 in the appropriate field via signals LINE21 and FIELD and generates signal SELECT to cause MUX 530 to couple signal SERIAL DATA to transmitter 540.

- 5 Microprocessor 520 then outputs the CC or EDS data on signal SERIAL DATA causing the CC or EDS data to be included in signal VIDEO via transmitter 540.

- Microprocessor 540 controls the priority of insertion of CC and EDS data. For example, CC data has higher priority than
10 EDS data because a closed caption display should be synchronized with the actual speech in the video signal. The CC data must be transmitted as required to maintain the desired synchronization. EDS data, however, may be transmitted whenever line 21 intervals are not being used for CC data.

- 15 Various modifications of the features described above are possible. For example, future modifications of FCC requirements may permit EDS data to be included in video lines other than line 21 of field 2. In addition, packet classes and types in addition to those described above may be defined. For
20 example, the "reserved" control codes in Table 4 and the "undefined" type codes may be defined in the future. These and other modifications are intended to be within the scope of the following claims.

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 33 -

Claims

1. A television system comprising:
means for receiving a television signal partitioned into
5 line intervals which are organized in successive fields; said
television signal including auxiliary information in the form of a
predetermined number of data words occurring in at one line of at
least some of said fields; at least some of said data words
representing alphanumeric characters and at least some of said
10 data words representing control information;
means for extracting said data from said television
signal; and
means for examining said extracted data words to
determine when one of said extracted data words represent a
15 class of information as well as control information, thereafter
when one of said extracted data words represents a subclass of
information of said class of information, and thereafter decoding
said data words to obtain said information pertaining to said
subclass.
20
2. The television system defined in claim 1, wherein:
two data words occur in sequence in a predetermined
one of said line intervals; and
said means for examining examines the first of said
25 two data words which occur in said predetermined line to
determine if it represents a class of information as well as control
information, and examines the second of said two data words
which occur in said predetermined line to determine if it
represents a subclass of information.
30
3. The television system defined in claim 2, wherein:
said data words representing alphanumeric characters
are encoded in ASCII format.

This Sheet Has Been Replaced



* C L M S *

SUBSTITUTE SHEET



4. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus

5 comprising:

means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal;

means coupled to said extracting means for converting
10 said extracted auxiliary information component from said predetermined line interval into binary data, said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data service information and being
15 organized by packets of binary data, a packet of binary data being associated with a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class;

means coupled to to said converting means for
20 decoding said binary data of said first field intervals to produce text display signals; and

means coupled to said converting means for decoding said control code data of said second field interval to identify said particular class of auxiliary information.

25

5. The apparatus of claim 4 wherein said video signal provides video program information from one of a plurality of video channels and said plurality of auxiliary information classes comprises:

30 a current program class including auxiliary information concerning a video program currently provided via one of said video channels; and

a future program class including auxiliary information concerning a video program that will be provided via one of said
35 video channels at a future time.



-35-

6. The apparatus of claim 5 wherein said plurality of auxiliary information classes further comprises a source class including auxiliary information concerning the source of said video signal.

7. The apparatus of claim 5 wherein said plurality of auxiliary information classes further comprises a miscellaneous class including auxiliary information not included in said current program class and said future program class.

8. The apparatus of claim 5 wherein
said predetermined line interval within said second
field intervals is a twenty-first line interval;
said binary data comprise first and second binary
bytes; and
said decoding means decodes said first binary byte to
identify said particular class of auxiliary information.

9. The apparatus of claim 8 wherein said first and
second bytes occur successively during said predetermined line
interval.

This Sheet Has Been Replaced



SUBSTITUTE SHEET



-36-

10. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus
5 comprising:

means for extracting an auxiliary information component occurring during a predetermined interval within said first and second field intervals from said video signal;

means coupled to said extracting means for converting
10 said extracted auxiliary information component from said predetermined line interval into binary data, said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data services information and being
15 organized by packets of binary data, a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class, a plurality of type data identifying respective subclasses of said particular class, and
20 information data corresponding to said subclasses;

means coupled to said converting means for decoding said binary data of said first field intervals to produce text display signals; and

means coupled to said converting means for decoding
25 said control code data and said type data of said second field to decode said information data.

11. The apparatus of claim 10 wherein one of said plurality of type data corresponds to program identification
30 information.

12. The apparatus of claim 11 wherein said program identification information comprises a time of day and a date at which said program will start.

35



SUBSTITUTE SHEET

-37-

13. The apparatus of claim 10 wherein said video signal provides video program information from one of a plurality of video channels and said plurality of auxiliary information classes comprises:

- 5 a current program class including auxiliary information pertaining to a program currently provided via one of said video channels; and
- a future program class including auxiliary information pertaining to a program that will be provided via one of said
- 10 video channels at a future time.

14. The apparatus of claim 13 wherein the data packet corresponding to said current program class and said future program class each include respective program

15 identification type data.

15. The apparatus of claim 10 wherein one of said plurality of type data corresponds to a program title.

20 16. The apparatus of claim 10 wherein one of said plurality of type data corresponds to caption service information.

 17. The apparatus of claim 10 wherein one of said plurality of type data corresponds to program description

25 information.

 18. The apparatus of claim 10 wherein one of said plurality of type data corresponds to network identification information.

30

 19. The apparatus of claim 10 wherein one of said plurality of type data corresponds to network name information.

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-38-

20. The apparatus of claim 10 wherein said plurality of type data corresponds to line number information indicating which one of said plurality of horizontal line intervals in said first and second field intervals includes auxiliary information.

21. The apparatus of claim 10 wherein one of said plurality of type data corresponds to information indicating that extended data services information corresponding to other ones of said type data is not available in said video signal.

22. The apparatus of claim 10 wherein said video signal corresponds to a currently tuned one of a plurality of video channels and one of said plurality of type data corresponds to information indicating that said extended data services information concerns only one of said plurality of video channels.

23. The apparatus of claim 10 wherein said video signal corresponds to a currently tuned one of a plurality of video channels and one of said plurality of type data corresponds to information indicating that said extended data services information concerns at least one of said plurality of video channels.

24. The apparatus of claim 10 wherein said predetermined line interval within said second field interval is a twenty-first line interval;

said binary data comprises first and second binary words; and

said decoding means decodes said second binary word to identify said particular type of auxiliary information.

25. The apparatus of claim 24 wherein said first and second bytes occur successively during said predetermined line interval.

This Sheet Has Been Replaced



SUBSTITUTE SHEET

- 39 -

26. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus comprising:

means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal; and

a microprocessor coupled to said extracting means for processing said extracted auxiliary information component in accordance with a sequence of instructions included in a control program; wherein

said control program includes a first portion causing said microprocessor to convert said extracted auxiliary information component from said predetermined line interval into binary data;

said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data services information and being organized by packets of binary data, a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class;

said control program including a second portion causing said microprocessor to decode said binary data of said first field intervals to produce text display signals; and

said control program including a third portion causing said microprocessor to decode said control code data to identify said particular class of auxiliary information.

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-40-

27. The apparatus of claim 26 wherein
said predetermined line interval within said second
field interval is a twenty-first line interval;

5 said binary data comprise first and second binary
words; and

said microprocessor decodes said first binary word to
determine said particular class of auxiliary information and
decodes said second binary word to identify said particular type
of auxilliary information.

10

28. The apparatus of claim 27 wherein said first and
second bytes occur successively during said predetermined line
interval.

This Sheet Has Been Replaced



* C L M S *

SUBSTITUTE SHEET

- 41 -

29. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus
5 comprising:

means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal; and

10 a microprocessor coupled to said extracting means for processing said extracted auxiliary information component in accordance with a sequence of instructions included in a control program; wherein

15 said control program includes a first portion causing said microprocessor to convert said extracted auxiliary information component from said predetermined line interval into binary data;

20 said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data services information and being organized by packets of binary data, a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class, a plurality of type data identifying respective
25 subclasses of said particular class, and information data corresponding to said subclasses;

30 said control program including a second portion causing said microprocessor to decode said binary data of said first field intervals to produce text display signals; and

35 said control program including a third portion causing said microprocessor to decode said control code data and said type data of said second field intervals to decode said information data.

This Sheet Has Been Replaced



SUBSTITUTE SHEET

-42-

30. The apparatus of claim 29 wherein
said binary data comprise first and second binary
words; and

5 said third portion of said control program causes said
microprocessor to 1) decode said first binary word to determine if
said binary codes represent said extended data services signal, 2)
further decode said first binary word of said binary codes
representing said extended data services signal to determine said
particular class of auxiliary information, and 3) decode said
10 second binary word to identify said particular type of auxiliary
information.

31. In a television system including means for
receiving television signals organized in successive field intervals.
15 each of said fields including a plurality of line intervals, auxiliary
data corresponding to closed caption information occurring in at
least one of said line intervals of at least some of said field
intervals, apparatus comprising:

means responsive to a selected one of said television
20 signals for extracting said data from said television signal; and
means responsive to said extracted data for
determining whether or not it corresponds to a control code
within a first control code range corresponding to closed caption
information or within a second code range corresponding to
25 extended data service information; said means being responsive to
said extracted data following the detection of a control code within
said first code range for processing said extracted data to produce
text representative display signals associated with a program
corresponding to a currently selected television signal; and said
30 means being responsive to said extracted data following the
detection of a control code within said second control code range
for determining the type of information represented by said
extracted data.

This Sheet Has Been Replaced



SUBSTITUTE SHEET



32. The apparatus recited in claim 31, wherein:
data corresponding to said closed caption information
and data corresponding to said extended data service information
comprises first and second bytes which occur successively during
5 the same predetermined line interval of alternating first and
second types of fields; and
said means responsive to said extracted data is
responsive to first byte occurring during said predetermined line
interval to determine if it represents a control code within said
10 first control code range or a control code in said second control
code range; said means being responsive to said second byte
occurring during said predetermined line interval following a
determination that said first byte represents a control code within
said first control code range for processing said second byte to
15 produce text representative display signals associated with a
program corresponding to a currently selected television signal;
said means being responsive to said second byte occurring during
said predetermined line interval following a determination that
said first byte represents a control code within said second control
20 code range for determining the type of information represented
by said second byte.

33. The apparatus recited in claim 31, wherein:
said television signals are organized in alternating first
25 and second types of fields, data corresponding to said closed
caption information occurring in said first type of fields and data
corresponding to said extended data service information occurring
in said second type of fields;
means responsive to said selected television signal for
30 generating a field type indicating signal indicating the occurrence
of said first and second types of fields is additionally provided;
and
said means responsive to said extracted data is also
responsive to said field type indicating signal for determining if
35 a control code is within said first or second control code range.





34. The apparatus recited in claim 31, wherein:
said television signals are organized in alternating first
and second types of fields, data corresponding to said closed
caption information and data corresponding to said extended data
service information occurring during the same predetermined line
interval in said first and in said second type of fields;

means responsive to said selected television signal for
generating a line indicating signal indicating the occurrence of said
predetermined line during each of said first and second types of
fields is additionally provided; and

said means for extracting said data is also responsive
to said line indicating signal.

35. The apparatus recited in claim 34, wherein:
means responsive to said selected television signal for
generating a field type indicating signal indicating the occurrence
of said first and second types of fields is additionally provided;
and

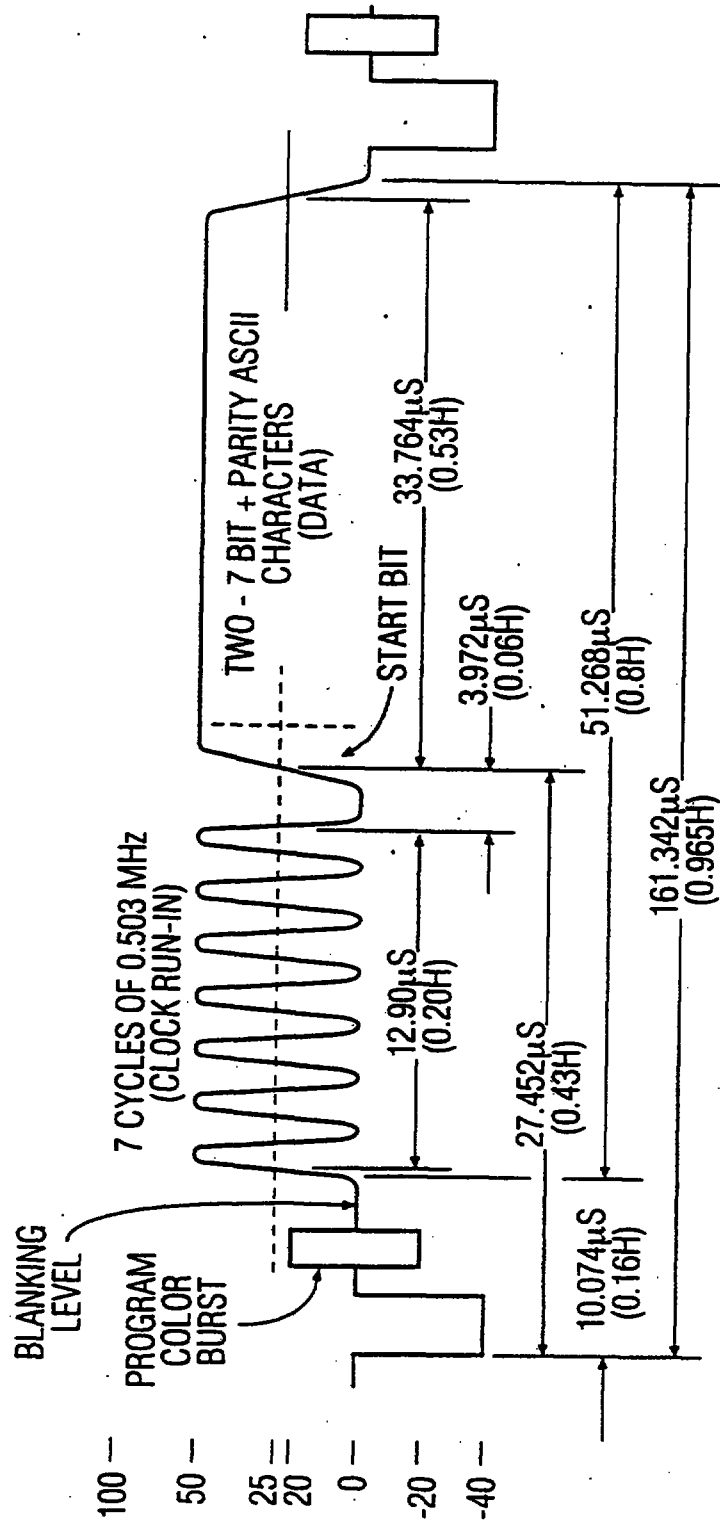
said means responsive to said extracted data is also
responsive to said field type indicating signal.

36. The apparatus recited in claim 31, wherein:
at least some of said control codes within said second
control code range identify respective classes of information and
are included in respective packets of data, each packet also
including a plurality of type codes identifying respective ones of a
plurality of subclasses of information, said type codes being
followed by respective data words representing information
associated with respective subclasses.

37. The apparatus recited in claim 36, wherein:
said control codes within said second control code
range also indicating whether a new packet has been started, a
previously identified packet is continuing or a previously
identified packet is terminating.



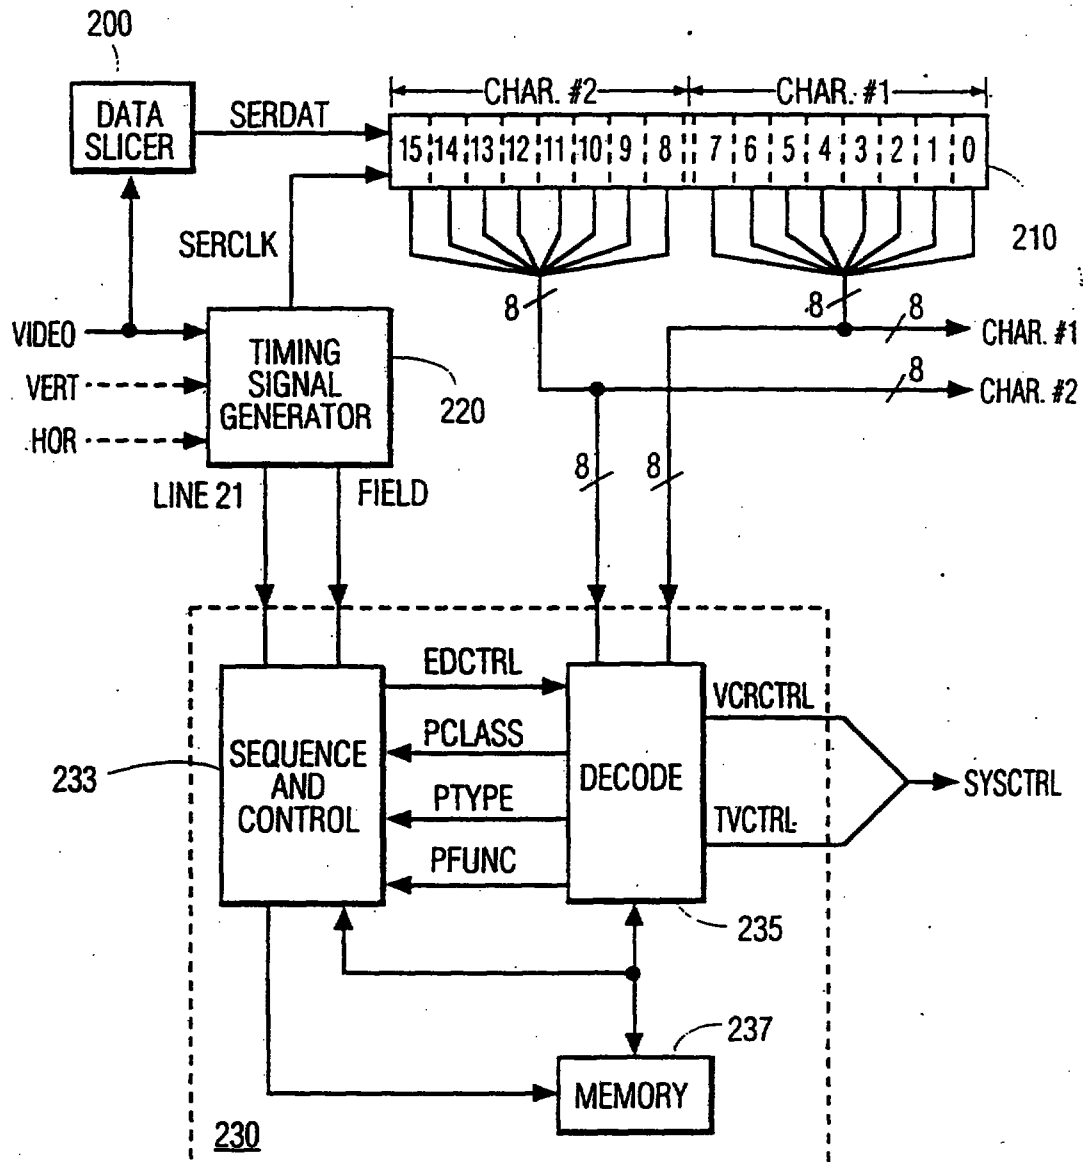
1/5

**FIG. 1**

This Sheet Has Been Replaced



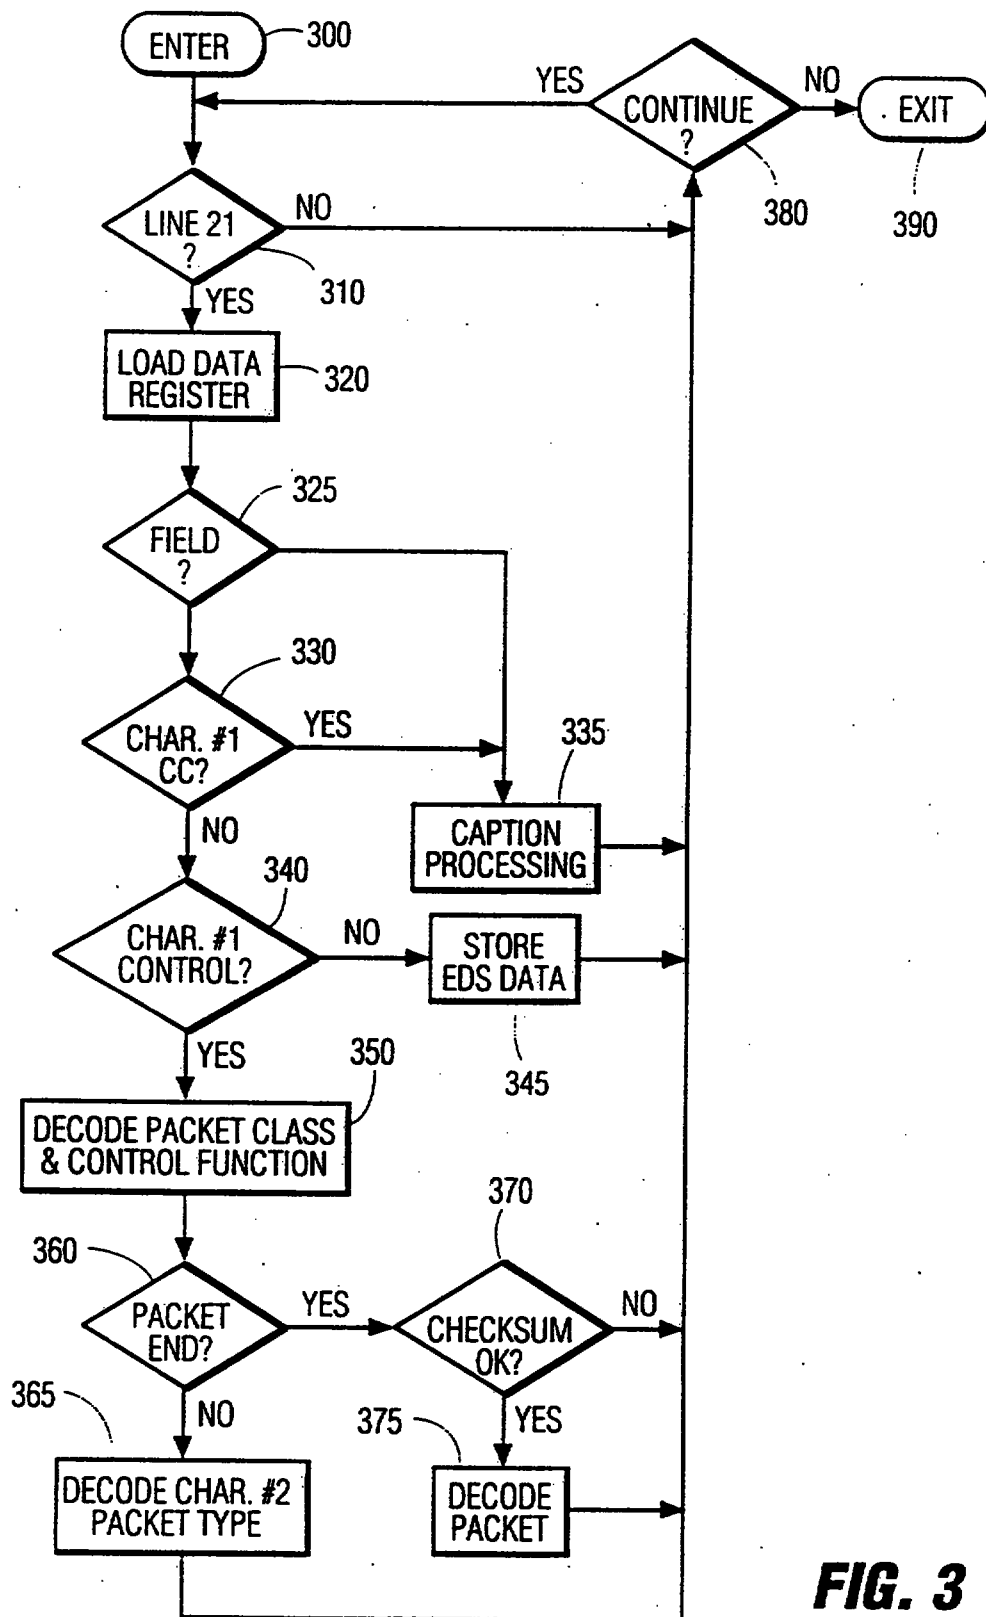
2/5

**FIG. 2**

This Sheet Has Been Replaced



3/5

**FIG. 3**

This Sheet Has Been Replaced



4/5

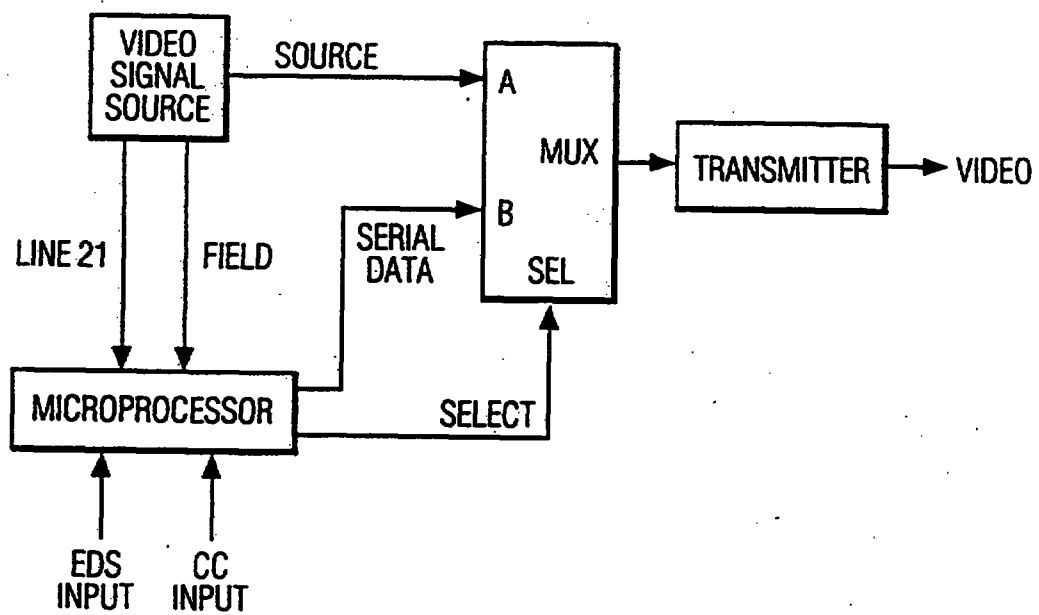
OCCURRENCE OF LINE 21, FIELD 2	CHAR #1	CHAR #2	EDS PACKET
1	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
2	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
3	04h = EDS CONTROL CODE FUNCTION: START PACKET CLASS: FUTURE PROGRAM	01h = EDS TYPE CODE TYPE: PROGRAM IDENTIFIER	START A
4	04h = EDS DATA: MINUTE = 0	48h = EDS DATA: HOUR = 8	A
5	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
6	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
7	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
8	01h = EDS CONTROL CODE FUNCTION: START PACKET CLASS: CURRENT PROGRAM	08h = EDS TYPE CODE TYPE: CAPTION SERVICES	START B
9	4Ch = EDS DATA ENGLISH CAPTIONING AVAILABLE IN CHANNEL 1 OF FIELD 2	48h = EDS DATA ENGLISH TEXT AVAILABLE IN CHANNEL 2 OF FIELD 1	B
10	03h = EDS CONTROL CODE FUNCTION: END PACKET CLASS: CURRENT PROGRAM	CHECKSUM	END B
11	05h = EDS CONTROL CODE FUNCTION: CONTINUE PACKET CLASS: FUTURE PROGRAM	42h = EDS DATA: DAY = 2 (CONTINUATION OF PROGRAM IDENTIFIER INFORMATION)	A
12	46h = EDS DATA: MONTH = 6 (CONTINUATION OF PROGRAM IDENTIFIER INFORMATION)	00h = NULL (NO DATA)	A
13	06h = EDS CONTROL CODE FUNCTION: END PACKET CLASS: FUTURE PROGRAM	CHECKSUM	END A

FIG. 4

This Sheet Has Been Replaced



5/5

**FIG. 5**

This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997

- 1 -

AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING EXTENDED DATA SERVICES

5 The present invention relates to the processing of
auxiliary video information that may be present in a video signal
during vertical blanking and overscan intervals. A video signal
typically includes vertical display intervals, or fields, having a
plurality of horizontal line intervals, e.g. 262.5 lines per field in
10 NTSC video systems. The beginning of each vertical and horizontal
interval is identified by respective vertical and horizontal sync
pulses that are included in a composite video signal. A portion of
each vertical interval is a vertical blanking interval that is not
normally intended for display. In addition, several line intervals
15 adjacent to the vertical blanking period may be within an
overscan region of a video display and will not be visible.

The lack of image information intended for display
during blanking and overscan intervals makes it possible to insert
an auxiliary information component, e.g. teletext or closed caption
20 (CC) data, into these intervals. Closed caption data represents
speech or other sounds in the audio portion of the video program.
The closed caption data is displayed in a portion of the video
display simultaneously with the corresponding video program
display to serve as an aid for hearing impaired viewers.
25 Standards such as Federal Communications Commissions (FCC)
Regulations define the format for each type of auxiliary
information including the location of the information within a
vertical interval. For example, the present closed captioning
standard (see e.g. 47 CFR §§ 15.119 and 73.682) specifies a closed
30 caption signal must occur during line 21 of field 1 in the format
shown in Figure 1.

Referring to Figure 1, the closed caption signal includes
a run-in clock (RIC) signal that occurs during the first half of line
21. The RIC signal is used as described below to facilitate the
35 extraction of the closed caption data that occurs during a data
interval in the last half of line 21. A signal transition at the

REPLACED SHEETS	SG
☐ Description : paged to paged	
☒ Claim(s) : paged <u>33</u> to paged <u>41</u>	
☐ Drawing(s) : paged to paged	
☒ Abstract : paged <u>45</u> to paged <u>5</u>	
DATE OF RECEIPT	

REPLACEMENT SHEETS	SG
☒ Description : paged <u>1</u> to paged <u>24</u>	
☒ Claim(s) : paged <u>3</u> to paged <u>41</u>	
☒ Drawing(s) : paged <u>5</u> to paged <u>35</u>	
☒ Abstract : paged <u>45</u> to paged <u>5</u>	
DATE OF RECEIPT <u>24/3/97</u>	

beginning of a "start bit" interval shown in Figure 1 indicates the beginning of the data interval. The start bit interval is followed by a signal during the remainder of the data interval that represents 16 bits of binary information. Each of the start bit and
5 binary bit intervals is approximately 2 μ s in duration. The 16 binary bits represent two 8-bit character codes in the case of closed caption data. Each character code includes a 7-bit ASCII code and a parity bit.

The FCC standard further specifies that the closed
10 caption signal may include two "channels" of closed caption data designated C1 and C2, and two "channels" of text data designated T1 and T2. Whether data in the closed caption signal is associated with C1, C2, T1, or T2 is determined by control codes that are included in the data. These control codes are listed at 47 CFR
15 §15.119. Two channels of closed caption data make it possible to provide closed captioning in two languages. For example, captioning in English is on C1 and captioning in Spanish is on C2. Because speech is not continuous in a video program, the second language information can be inserted into the closed caption signal
20 during intervals when speech is not occurring. The T1 and T2 text channels provide similar dual-language capability for the display of text that may be unrelated to the audio portion of the video program.

United States law requires that all television receivers
25 13 inches and larger in size that are sold in the U.S. after 1 July 1993 must be capable of decoding a closed caption signal (see 47 CFR §15.119). This requirement adds to the cost and complexity of most televisions. Many television users, particularly individuals who are not hearing impaired, may not wish to utilize
30 the closed caption capability. Thus, television manufacturers must invest in the development of a feature that is of value to only a limited number of individuals who purchase televisions. In addition, many individuals will be compelled to pay for a feature that is of little or no value to them.

35 The embodiment of the present invention concerns a system for processing auxiliary video signals that provides for

This is the replacement sheet

Date: 24 MAR 1997

decoding an extended data services (EDS) signal in line 21 of field 2. The EDS signal is transmitted in addition to closed caption information. Extended data services provide a general purpose video system information and control capability. Extended data services information is arranged in packets of data. Each packet provides information regarding current or future video programs, the source of the video program, and miscellaneous information such as time of day. The extended data services data may be decoded to control the operation of a video system including a videocassette recorder (VCR) and a television receiver.

The invention may be better understood by referring to the drawing, in which:

Figure 1 shows an example of an auxiliary video data signal such as a closed caption or extended data services signal:

Figure 2 shows, in block diagram form, a portion of a video signal processing system incorporating a closed caption/extended data services decoder constructed in accordance with an aspect of the invention;

Figure 3 shows a flowchart illustrating the operation of the system shown in Figure 2;

Figure 4 shows an example of the interleaving of closed caption and extended data services data; and

Figure 5 shows, in block diagram form, a portion of a video signal processing system for generating a video signal including extended data services information.

An extended data services (EDS) signal exhibits the same format as the closed caption (CC) signal format that is shown in Figure 1 and described above. However, an EDS signal occurs during line 21 of each field 2 interval. EDS data provides a variety of information in addition to closed caption information. For example, EDS data may identify a particular current or future program and provide information such as the duration, time, and content of the program. This information may be captured by the video receiver and displayed in response to activation by a user.

As an example, a user selecting a program that is in progress may identify the program by causing the title that is extracted from

EDS data to be displayed. Alternatively, the a video recorder can be programmed with EDS data to record a particular program.

A decoder shown in Figure 2 decodes CC and EDS data from a video signal. The decoder may be part of a video signal processing integrated circuit. In Figure 2, composite video signal VIDEO is input to data slicer 200. Data slicer 200 converts closed caption and extended data services information in analog signal VIDEO into serial digital data in signal SERDAT. Data slicer 200 may be implemented, for example, using a comparator that compares the level of signal VIDEO to a threshold level during the data interval in the last half of the line 21 interval (see Figure 1). The threshold level in data slicer 200 is referred to as the slicing level. Logic 0 and logic 1 levels in signal SERDAT represent levels of signal VIDEO that are less than and exceed, respectively, the slicing level.

The accuracy of data slicing is improved if the slicing level is approximately 50% of the amplitude of the data signal in the last half of the line 21 interval. The run-in clock (RIC) signal in the first half of the line 21 interval (see Figure 1) may be used to adapt the slicing level to the data signal amplitude. For example, setting the slicing level to the average of the RIC signal amplitude provides an appropriate slicing level because FCC requirements specify that the amplitude of the RIC signal is the same as the data signal amplitude.

The CC or EDS data in signal SERDAT is clocked serially into shift register 210 by a clock signal SERCLK. Signal SERCLK is generated by timing signal generator 220 during the data interval within line 21, i.e., the latter portion of line 21 in which the information representing the 16 data bits occurs (see Figure 1). Generator 220 determines when line 21 is present in signal VIDEO by counting horizontal lines in the video signal as indicated by horizontal sync pulses in signal VIDEO. The horizontal line count is initialized at the beginning of a video field as indicated by the vertical blanking intervals in signal VIDEO. A sync separator is included in generator 220 to produce a separated sync signal from composite video signal VIDEO that provides the required

This is the replacement sheet

Date: 24 MAR 1997

horizontal and vertical synchronization information.

Alternatively, as shown in Figure 2, signals VERT and HOR from deflection circuitry in a video system could be used for synchronization.

5 The 16 bits of data in register 210 are designated bits 0 to 15 in Figure 2. Bits 7-0 represent the first CC or EDS character, CHAR#1, and bits 15-8 represent the second character, CHAR#2. Bits 15 and 7 are the parity bits of the respective characters. The serial data in register 210 is converted to parallel data via 16
10 parallel outputs from register 210. The parallel data is output to other units in the video system such as an on-screen-display (OSD) processor (not shown in Figure 2) for generating signals to display closed captioning data and certain types of EDS data (e.g., program title). The parallel data in CHAR#1 and CHAR#2 is also
15 coupled to processing unit 230 for decoding of EDS information.

 The format of EDS information is explained in detail below. Briefly, EDS information is arranged in packets of information. Each packet includes a plurality of 8-bit characters from a plurality of occurrences of line 21 of field 2. Each packet
20 represents a complete piece of information that includes both control and data characters.

 The control characters identify a particular EDS control function (e.g., start packet, continue packet, or end packet) in a manner that distinguishes EDS information from closed caption
25 information. Because CC data is in line 21 of field 1 and EDS data is in line 21 of field 2, it would appear that distinguishing field 1 from field 2 is sufficient to distinguish CC data from EDS data. However, closed caption service may be improved in certain instances by expanding closed caption data service to line 21 of
30 both fields 1 and 2. For example, the bandwidth of channels C1 and C2 in line 21 of field 1 may be insufficient to provide dual language capability for very rapid speech. Additional bandwidth is provided by defining channels C3 and C4 of closed captioning in line 21 of field 2. Similarly, additional text channels T3 and T4
35 may be defined in line 21 of field 2. If closed captioning can occur in line 21 of field 2, the EDS data must be distinguishable from

This is the replacement sheet

Date: 24 MAR 1997

closed caption information. This is accomplished as described below by the choice of EDS control characters.

EDS control characters also indicate the class and type of information included in a packet. Packet class designations
5 indicate general classifications of the information included in a packet. For example, a packet class indicates whether the packet contains information pertaining to a future program, the current program, the source of a program (e.g., the broadcast network), or miscellaneous information (e.g., time of day). Each packet class
10 encompasses a plurality of specific types of information. In addition to packet class, EDS control characters also identify the particular type of information in a packet. For example, a packet type of "program title" within the "current program" class indicates that the data characters in the packet represent the title
15 of the current program.

EDS packets may be transmitted repeatedly by the video signal source by making use of all occurrences of line 21 in field 2 that are not being used for other purposes such as closed caption or text data. For example, the current program title might
20 be retransmitted every 2 minutes to ensure that a user can access current program title information with relatively little delay. Other information such as future program data might be transmitted at less frequent intervals or when changes to the program schedule occur.

25 In Figure 2, processor 230 includes decoder 233 for detecting and decoding EDS information. The decoding process in decoder 230 is controlled by control unit 233. When line 21 ends as indicated by signal LINE21 from timing generator 230, new character data is present in register 210. If the current video
30 field is field 2, as indicated by signal FIELD from timing generator 230 being at logic 1, the new character data in register 210 may be EDS data. Control unit 233 responds to signals FIELD and LINE21 by generating signal EDCTRL to initiate the decoding process in decoder 235.

35 Decoder 235 first tests the CHAR #1 code to determine if the character data is EDS data. If CHAR #1 is an EDS control

code, decoder 235 proceeds to decode the EDS control information. If CHAR #1 is neither an EDS control code nor a closed caption control code, and the immediately preceding occurrence of line 21 in field 2 included EDS data, the current CHAR #1 code is

- 5 processed as EDS data. If CHAR #1 is neither an EDS control code nor a closed caption control code, and the immediately preceding occurrence of line 21 in field 2 included closed caption data, the current CHAR #1 code is processed as closed caption data.

- 10 If CHAR #1 is an EDS control code, CHAR #1 is decoded to establish the EDS packet function (i.e. start, continue, end) and packet class. As described below, if CHAR #1 indicates "packet start", the CHAR #2 code represents the packet type. The decoded function, class, and type information is communicated to control unit 233 from decoder 235 via signals PFUNC, PCLASS, and PTYPE.
15 respectively. EDS data characters follow. "start", "type", and "continue" control characters. Control unit 233 causes the decoded packet control information and data characters to be stored in memory 237 until a complete packet is received as indicated by the EDS control code for the "end packet" function.

- 20 The "end packet" control code in CHAR #1 is followed in CHAR #2 by a "checksum" value that is tested in decoder 235 to evaluate whether the data in the packet is error free. If the packet data is error free, subsequent decoding and storage of the packet data that is indicated by the packet class and type
25 information is completed. If the checksum evaluation indicates that the packet data includes an error, the packet data is ignored and a subsequent retransmission of the packet will be captured to provide the correct data.

- Decoder 235 generates system control signals SYSCTRL
30 for controlling the aspects of the video system in response to the EDS information. For example, a video cassette recorder (VCR) may be activated to begin recording or set the correct time of day in response to control signal VCRCTRL from decoder 235. Similarly, a television may be controlled via signal TVCTRL to
35 modify the on-screen display (OSD) processor operation to display closed captioning in response to EDS data indicating the presence

This is the replacement sheet

Date: 24 MAR 1997

of closed caption services. Processor 230 in Figure 2 also includes capability for detecting and decoding closed caption data. Thus, control signals SYSCTRL also include closed caption control signals coupled to the OSD processor that control the closed caption display.

Processor 230 in Figure 2 may be implemented using a microprocessor. For example, the sequence and control functions of unit 233 could be accomplished with a software control program. Data slicer 200, register 210, and timing signal generator 220 may also be included with the microprocessor function in a single integrated circuit. The operation of an embodiment of the system in Figure 2 including a microprocessor may be better understood by referring to a flowchart shown in Figure 3.

In Figure 3, processing begins at step 300 in Figure 3 when closed caption or EDS processing is enabled by events such as the receiver being turned on or activation of EDS capability by a user (e.g., via a remote control button). Operation pauses at step 310 until a line 21 interval is detected. This indication may be provided, for example, by signal LINE21 in Figure 2. At step 320 in Figure 3, serial data from line 21 is loaded into a data register (e.g., register 210 in Figure 2). Next, the current field is determined at step 325 by, e.g., testing signal FIELD in Figure 2. If the current field is field 1, the data in the data register cannot represent EDS data, and operation continues at step 335 where the register data is processed as closed caption data.

At step 325, if the current field is field 2, operation continues at step 330 where CHAR #1 is evaluated to determine if CHAR #1 is closed caption data in field 2. If CHAR #1 is closed caption data, step 335 is executed where the data is processed as closed caption data. For example, closed caption characters are transferred to an OSD processor for subsequent display. If CHAR #1 is not closed caption data at step 330, CHAR #1 is presumed to be EDS data and operation proceeds to step 340. At step 340, CHAR #1 is tested to determine if CHAR #1 represents an EDS control code. If CHAR #1 is not an EDS control character at step

340. the character is EDS data that is stored in memory at step 345.

Detection of an EDS control code at step 340 is followed by decoding of CHAR #1 at step 350 to determine the EDS packet function and packet class. Signals PFUNC and PCLASS in Figure 2 are generated at step 350. The packet function is tested further at step 360 to determine whether the packet function indicates the end of the packet. If the function is not "end packet", CHAR #2 is decoded at step 365 to determine the packet type. Signal PTYPE in Figure 2 is generated at step 365. If the end of the packet is detected at step 360, the checksum in CHAR #2 is tested at step 370 to detect errors in the packet data. The packet data is processed further at step 375 if no errors are detected by, for example, decoding control information in the packet data to generate control signals for the system or storing the packet data for later use, such as in the case of program title information, activated by a user.

Following steps 310, 335, 345, 365, 370, and 375 in Figure 3, operation continues at step 380 where the system checks to determine if auxiliary video information (i.e. CC or EDS data) processing remains enabled. If enabled, operation continues by searching for the next occurrence of line 21 at step 310. If disabled, the procedure in Figure 3 is exited at step 390.

The described system processes auxiliary video information formatted in a predetermined manner to facilitate determining whether the information in line 21 is closed caption or EDS information. An exemplary EDS data formatting specification suitable for use with the embodiment depicted in Figure 2 is described below.

30

1. General EDS Data Format Information

The encoding of information for the extended data services (EDS) follows the same general format as for closed caption data encoding. This scheme consists of pairs of characters transmitted in the same field. The characters can be either a

35

This is the replacement sheet

Date: 24 MAR 1997

control code pair or a data pair. The first byte of the pair determines whether the pair is a control pair or a data pair. If the first byte is in the range of 01h to 0Fh, the pair is a control pair. These values are not defined for captioning or text transmission.

5 Upon receiving such a control code pair, the decoder would recognize subsequent data as EDS data. This is the same scheme that is used when decoding a closed caption signal to differentiate between caption and text mode, and between operating channel 1 and operating channel 2 (i.e. C1 and C2) of the caption signal. All
10 characters are transmitted using odd parity. This is consistent with the closed caption conventions, and allows for simpler encoding/decoding hardware and software.

There are four varieties of EDS characters: Control, Type, Data, and Checksum. These characters may be transmitted
15 in the combinations shown in Table 1.

Table 1

1 st Byte	2 nd Byte
Control	Type
Control	Data
Data	Data
Control	Checksum

20 As described above, the Control byte is in the range of 01h to 0Fh. The Type and Checksum bytes are in the range of 00h to 7Fh. The data byte is in the range of 10h to 7Fh for ASCII data, or in the range of 40h to 7Fh for Non-ASCII data. A Data byte of 00h is a null byte, and is always ignored.

30 A packet of EDS data is defined to be a collection of these pairs of bytes which conveys a complete piece of information. Each byte of EDS data is associated with a packet of data. A sub-packet is defined to be a control pair followed by some number, maybe zero, of data pairs. A data field is defined to be some number of bits within a Data byte. Each sub-packet may
35 be transmitted independently and surrounded by other information. Note that a full packet could be transmitted using

This is the replacement sheet

Date: 24 MAR 1997

only control pairs, or by also using data pairs for more throughput when possible.

There are three categories of Control bytes: Start, Continue, and End. The Start code indicates the beginning of a new packet. The Continue code indicates the following data is part of the packet which began with the last Start code. The End code indicates the packet is finished. The Type byte always follows the Start code to indicate the type of data contained in the new packet. The Checksum byte always follows the End code and is used for error detection.

Once a packet has been started, the data for the packet can be sent one byte at a time by using a Continue code with each byte to create a separate sub-packet for each byte. Each subpacket occurs during a single instance of line 21. For higher throughput, both bytes during a particular line 21 interval may contain data. In this case, a sub-packet includes data from a plurality of line 21 intervals. The data in a particular line 21 interval belongs to the sub-packet which began with the last Start or Continue code. The transmission of data pairs can not be interrupted by any other information. If it is necessary to interrupt the transmission of data pairs, the transmission of the packet is reestablished by sending a Continue control pair. The example shown in Table 2 illustrates the described process.

Table 2

1 st Byte	2 nd Byte
... other ...	... other ...
Start	Type
Data	Data
... other ...	... other ...
Continue	Data
Data	Data
Data	Data
... other ...	... other ...
Continue	Data
... other ...	... other ...
End	Checksum
... other ...	... other ...

This is the replacement sheet

Date: 24 MAR 1997

The described approach will allow broadcasters the flexibility to simultaneously use any combination of captions or text using either C1 or C2, and EDS. It also permits the efficient transmission of EDS information if it is the only service offered on field two of the video signal.

There are four classes of packets currently defined: Current, Future, Network, and Miscellaneous. The Current packet contains information describing the program currently being transmitted. The Future packet contains information about an upcoming program to be transmitted. The Network packet contains information about the source of the video signal, e.g the broadcasting network. The Miscellaneous packet contains a variety of other useful information. Table 3 shows the assignment of these packet classes to their respective control codes.

Table 3

Control Code	Function
01h	Current Start
02h	Current Continue
03h	Current End
04h	Future Start
05h	Future Continue
06h	Future End
07h	Network Start
08h	Network Continue
09h	Network End
0Ah	Misc. Start
0Bh	Misc. Continue
0Ch	Misc. End
0Dh	Reserved
0Eh	Reserved
0Fh	Reserved

The transmission of one class of packet may be interrupted by another class of packet because each of the four packet classes has its own group of control codes. As a result, higher priority information can interrupt lower priority information. For example, information about the current program is probably more time critical than is information regarding a future program. A complete packet of "current" information might be sent in the middle of transmitting a packet of "future"

information. Thus, single fields of lower priority information can be inserted when unused line 21 intervals are available.

However, a packet can only be interrupted by a packet of a different class. This ensures that packets can be "nested" without
5 confusion regarding which packet data is to be associated with when a "continue" control code is issued.

Each packet conveys one piece of information. The first byte of the control code pair that begins a packet (i.e. "start" control code) determines the packet class as shown in Table 3.

10 The type of information contained in the packet is determined by the Type code in byte two of the Start control code pair. The data bytes associated with a packet are held in temporary storage until the entire packet has been received and the checksum at the end of the packet has been validated. This prevents stored data from
15 being corrupted, and also permits a packet to be aborted in the middle by starting a new packet of the same class.

The data types included in Current and Future packet classes are identical, i.e. the Type designations for both packets is the same. The difference between the Current and Future classes
20 is the "object" of the data, i.e. "current" or "future" program. Any information regarding the current program which can be transmitted via EDS can also be sent in regard to a future program, and vice versa. The data contained in the Future packet always pertains to the "future" program that was most-recently
25 specified in the EDS information. The future program is specified by sending a program identifier as the Type code in a Future packet. This Type code indicates which future program all transmitted information is to pertain to until another program identifier Type code is sent. Similarly, the information in the
30 Current packet class always pertains to the program currently being transmitted. When a new program identifier is sent in a Current packet, the old program has finished and the newly specified program is beginning.

The data which constitutes the program identifier is
35 simply the scheduled broadcast time, date, and receiver channel number. This has the advantage of being a compact, simple to

calculate, and unique identifier for each program broadcast on a given channel per year. Even if the broadcast of a program is delayed, it should still carry its originally scheduled time as its program identifier data throughout its entire broadcast. This will allow the recording of programs which are delayed or run longer than expected. All time and date specifications, including current time and date, are always given as Greenwich Mean Time (GMT). Providing both the start time of a future program and the current program identifier as GMT ensures that the identification of a desired program will be independent of the viewer's time zone and "daylight saving" time status. This permits correct recording, e.g. in a video cassette recorder (VCR), even if the viewer does not tell his VCR what time zone he is in. The only purpose for specifying the viewer's time zone and daylight saving status is to display the correct local time given the broadcast time as GMT.

2. Current and Future Packet Classes

Table 4 shows the assignment of Type codes in the Current and Future packet classes.

Table 4

Type Code	Function
00h	Unidentify Program
01h	Program Identifier
02h	Erase Program
03h	Stop Time
04h	Program Title
05h	Program Audience
06h	Program Type
07h	Audio Services
08h	Caption Services
09h	-undefined-
0Ah	-undefined-
78h	Description 8
7Fh	Description 1

This is the replacement sheet

Date: 24 MAR 1997

2.1 "Unidentify Program" Packet Type

This packet contains zero bytes, but indicates the program is to be unidentified. It has the opposite effect of the program identifier packet. When received, all subsequent packets of this class will be ignored until another program identifier is received. This could be used as a signal that the specified program information has all been sent.

2.2 "Program Identifier" Packet Type

This packet contains either four or six bytes which define a program start time and date, relative to Greenwich Mean Time, and receiver channel number. The format of each byte is shown in Table 5. Note that bit #6 in each byte is always set to logic 1 because the information in each byte is not ASCII data. Also, note that the bit #7 (bit b7) is not shown in Table 5, or other tables below, because bit #7 of each byte is a parity bit.

Table 5

Data	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
minute	1	m ₃	m ₄	m ₃	m ₂	m ₁	m ₀
hour	1	T	h ₄	h ₃	h ₂	h ₁	h ₀
day	1	D	d ₄	d ₃	d ₂	d ₁	d ₀
month	1	Z	L	m ₃	m ₂	m ₁	m ₀
channel	1	c ₅	c ₄	c ₃	c ₂	c ₁	c ₀
channel	1	s ₁	s ₀	--	--	c ₇	c ₆

The minute data field has a valid range from 0 to 59. the hour field from 0 to 23, the day field from 1 to 31, and the month field from 1 to 12. The "D" bit determines if daylight saving time is currently being observed throughout the country. The "L" bit determines if the current year is a leap year. The "Z" bit determines if the current time in seconds should be reset to zero. The "D", "L", and "Z" bits are ignored by the decoder when processing this packet (see the description of the "time of day"

This is the replacement sheet

Date: 24 MAR 1997

Type code assignment in the section below that pertains to the Miscellaneous packet class). The "T" bit is processed as part of the program identifier packet to determine if the program is subject to a local tape delay. Even if the broadcast of a program is
5 delayed, it should still carry its originally scheduled time as its program identifier data throughout its entire broadcast.

The "channel" data field is an optional two-byte field having a valid range from 0 to 255. If the channel field is omitted, the receiver channel will default to the currently tuned
10 channel. The channel field allows one channel to specify information for another channel. The channel data field contains a two bit subfield which specifies the source input. The source subfield has a valid range from 1 ($S_1S_0 = 00$) to 4 ($S_1S_0 = 11$) that can be used in a multi-wire cable system to specify the cable line.

15

2.3 "Erase Program" Packet Type

This packet contains zero bytes, but indicates the specified program data is to be completely deleted. This will be
20 most useful for the Future packet class.

2.4 "Stop Time" Packet Type

This packet contains either zero or four bytes which
25 define a program stop time and date relative to Greenwich Mean Time. If the packet contains zero bytes, the existing stop time will be erased. The format of the bytes is the same as for the "program identifier" packet described above in section 2.2 except that no channel data is needed. The "D", "L", and "Z" bits are also
30 ignored by the decoder when processing this packet as described in section 2.2.

2.5 "Program Title" Packet Type

35 This packet contains a variable number, 0 to 32, of bytes which define a program title. If the packet contains zero

This is the replacement sheet

Date: 24 MAR 1997

bytes. the existing program title will be erased. Each byte is an ASCII character in the range of 20h to 7Fh. The variable size of this packet allows for efficient transmission of titles of any length. No "size" indicator byte is needed because the End control code pair is used to terminate the packet.

2.6 "Program Audience" Packet Type

This packet contains a variable number of bytes, namely zero to three, which define the intended audience for the program. If the packet contains zero bytes, the existing program audience will be erased. For any data bytes in this packet, bit #6 is set to logic 1 because the data is not ASCII data. The format of the data bytes is shown in Table 6.

Table 6

b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
1	M	W	S	A	T	C
1	D	--	V	L	N	A
1	q ₂	q ₁	q ₀	r ₂	r ₁	r ₀

The data bytes in this packet must be sent in the order shown in Table 6. Table 7 defines the function of the bits for bytes one and two shown in Table 6.

Table 7

Byte One		Byte Two	
C	Children	A	Adult Situations
T	Teens	N	Nudity
A	Adults	L	Language
S	Seniors	V	Violence
W	Women	--	undefined
M	Men	D	Data Services

Bit definitions may be selected from the list in Table 7 in any combination that is needed to communicate the desired information. Byte one indicates the target audience. For example, to specify a program as suitable for the entire family, all bits in byte one would be set. Byte two indicates why the target audience may have been restricted from the entire family.

Byte three in Table 6 contains data fields representing program quality and rating information for movies. The format for byte three is shown in Table 8.

Table 8

q_2, q_1, q_0	Quality	r_2, r_1, r_0	Rating
0 0 0	Unknown	0 0 0	Unknown
0 0 1	*	0 0 1	G
0 1 0	*½	0 1 0	PG
0 1 1	**	0 1 1	PG-13
1 0 0	**½	1 0 0	R
1 0 1	***	1 0 1	NC-17
1 1 0	***½	1 1 0	X
1 1 1	****	1 1 1	None

2.7 "Program Type" Packet Type

This packet contains a variable number, 0 to N, of bytes which specifies the type of information included in a particular program. The information in this packet could be used by a viewer to selectively look for certain types of programs. If the packet contains zero bytes, the existing program type will be erased. The first two bytes are not ASCII data and, therefore, bit #6 is set to logic 1 in the first two bytes. The third through Nth bytes are ASCII characters in the range of 20h to 7Fh.

The format of the first two bytes is shown in Table 9.

Table 9

$b_7, b_6, b_5, b_4, b_3, b_2, b_1, b_0$
1 N S E E L C
1 $t_7, t_6, t_5, t_4, t_3, s_2, s_1, s_0$

This is the replacement sheet

Date: 24 MAR 1997

The first two bytes must be sent in the order shown in Table 9.

The first byte defines the general category of the information in the program. The type of information indicated by the bits in the first byte is shown in Table 10.

Table 10

C	Classified
L	Life / Style
E	Education
E	Entertainment
S	Sports
N	News

A logic 1 in a bit position shown in Table 9 indicates that the program provides the corresponding type of information listed in Table 10. If necessary, multiple bits can be set to logic 1 to indicate that the program includes multiple categories of information. Byte two provides additional program information as shown in Table 11.

Table 11

t_1, t_0	Format	t_1, t_0	Time Slot	s_1, s_0	Status
0 0	Special	0 0	Once	0 0	Premiere
0 1	Series	0 1	Once Week	0 1	Live
1 0	Mini-Series	1 0	Weekdays	1 0	Tape Delay
1 1	Movie	1 1	Every Day	1 1	Re-Run

Bytes three to N provide additional information which can be used to further specify the type of programming. These bytes are sent as ASCII characters, but the character codes represent the words listed in Table 12.

This is the replacement sheet

Date: 24 MAR 1997

Table 12

	Code	Qualifier		Code	Qualifier		Code	Qualifier
	20h	Unknown		40h	Gymnastics		60h	Singing
	21h	Action / Adventure		41h	Health		61h	Skating
5	22h	Amatuer		42h	Hobby		62h	Skiing
	23h	Animated		43h	Hockey		63h	Soap Opera
	24h	Arts		44h	Home		64h	Soccer
	25h	Auto		45h	Horror		65h	Special
	26h	Awards		46h	Hunting / Fishing		66h	Talk
	27h	Baseball		47h	Improvement		67h	Tennis
	28h	Basketball		48h	Informational		68h	Text
10	29h	Bowling		49h	Instructional		69h	Track / Field
	2Ah	Boxing		4Ah	Investment		6Ah	Travel
	2Bh	Business		4Bh	Legal		6Bh	Variety
	2Ch	Cartoon		4Ch	Local		6Ch	Video
	2Dh	Classical		4Dh	Medical		6Dh	Volleyball
	2Eh	Comedy		4Eh	Military		6Eh	War
	2Fh	Commercial		4Fh	Musical		6Fh	Weather
15	30h	Computer		50h	Mystery / Suspense		70h	Western
	31h	Concert		51h	National		71h	World
	32h	Contemporary		52h	Nature		72h	Wrestling
	33h	Criminal		53h	Opinion		73h	<i>special 1</i>
	34h	Dancing		54h	Performing		74h	<i>special 2</i>
	35h	Diving		55h	Personal		75h	<i>special 3</i>
	36h	Documentary		56h	Political		76h	<i>special 4</i>
20	37h	Drama		57h	Professional		77h	<i>special 5</i>
	38h	Erotica		58h	Public		78h	<i>special 6</i>
	39h	Fantasy		59h	Racing		79h	<i>special 7</i>
	3Ah	Fiction		5Ah	Religious		7Ah	<i>special 8</i>
	3Bh	Financial		5Bh	Romance		7Bh	<i>special 9</i>
	3Ch	Football		5Ch	Sales		7Ch	<i>special 10</i>
	3Dh	Fund Raiser		5Dh	Science		7Dh	<i>special 11</i>
25	3Eh	Game / Quiz		5Eh	Service		7Eh	<i>special 12</i>
	3Fh	Golf		5Fh	Shopping		7Fh	Other

The bytes listed in Table 12 may be used in whatever combination is necessary to specify the desired level of information regarding the type of programming. However, multiple bytes should be sent in proper grammatical order. In addition, it should be noted that receivers may impose limitations on the number of bytes that will be recognized.

The byte designated "Unknown" in Table 12 is the default value if no other bytes from Table 12 are included in the Program Type packet. The twelve "special" bytes listed in Table 12 may be defined by each network to best suit individual

This is the replacement sheet

Date: 24 MAR 1997

programming needs (see the Type code assignments for "special qualifiers" in the section below that describes the Network packet class). The byte designated "Other" in Table 12 indicates that the type of programming is known and does not fit into any of the defined programming types. All twelve of the "special" bytes listed in Table 12 implicitly include the "Other" designation.

2.8 "Audio Services" Packet Type

This packet contains either zero or two bytes which define the contents of the main and second audio programs that are associated with the video signal. If the packet contains zero bytes, existing audio services information will be erased. Bit #6 is set to logic 1 in the data bytes in this packet because the data bytes are not ASCII data. The format of the bytes is shown in Table 13.

Table 13

Data	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
main	1	t ₂	t ₁	t ₀	t ₂	t ₁	t ₀
sap	1	t ₂	t ₁	t ₀	t ₂	t ₁	t ₀

Each of the two bytes listed in Table 13 contains two data fields: language and type. The language field of each byte represents the languages listed in Table 14.

Table 14

t ₂	t ₁	t ₀	Language
0	0	0	Unknown
0	0	1	English
0	1	0	Spanish
0	1	1	French
1	0	0	German
1	0	1	Japanese
1	1	0	Other
1	1	1	None

This is the replacement sheet

Date: 24 MAR 1997

The type field of each byte listed in Table 13 is encoded to represent the information shown in Table 15.

Table 15

Main Audio Program				Second Audio Program			
t_2	t_1	t_0	Type	t_2	t_1	t_0	Type
0	0	0	Unknown	0	0	0	Unknown
0	0	1	Mono	0	0	1	Mono
0	1	0	Simulated Stereo	0	1	0	Descriptive Video Service
0	1	1	True Stereo	0	1	1	Non-program Audio
1	0	0	Stereo Surround	1	0	0	Special Effects
1	0	1	Data Service	1	0	1	Data Service
1	1	0	Other	1	1	0	Other
1	1	1	None	1	1	1	None

2.9 "Caption Services" Packet Type

This packet contains a variable number, 0 to 8, of bytes which define the available forms of caption encoded data.

If the packet contains zero bytes, existing information regarding caption serves will be erased. One byte is included to specify each available service. Bit #6 is set to logic 1 in each byte because the data is not ASCII data. Each of the bytes is in the format shown in Table 16.

Table 16

b_6	b_5	b_4	b_3	b_2	b_1	b_0
1	L_2	L_1	L_0	F	C	T

The language data field (L_2 - L_0 in Table 16) is encoded using the same format as for the audio services packet described in section 2.8 above. The "F" bit determines if the data is in TV field one ("F" = 0), or in field two ("F" = 1). The "C" bit determines if the data is in channel C1 ("C" = 0), or in channel C2 ("C" = 1). The "T" bit determines if the data is captioning ("T" = 0), or text

This is the replacement sheet

Date: 24 MAR 1997

("T"=1). This information permits the broadcaster to completely specify the line 21 services that are available.

2.10. "Undefined" Packet Types

5

Type Codes 09h and 0Ah in Table 4 are undefined. These type codes may be defined in the future to further expand EDS capability. For example, one of the undefined type codes might be allocated to provide information regarding video

10 "scrambling". Various approaches are used for encoding, or scrambling, a video signal to prevent viewing by unauthorized users, e.g. "pay-per-view" programming. Information regarding the type of scrambling might be useful to permit authorized users to more effectively decode the scrambled signal.

15

Another possible use for the undefined codes is to provide information regarding the aspect ratio of the video image in a program. Aspect ratio information would permit the system to select only certain aspect ratio programs. Alternatively, the video receiver could use the aspect ratio information to adapt the

20 signal to the particular display screen aspect ratio of the video receiver.

2.11. "Description 'N'" Packet Type

25

These packets each contain a variable number, 0 to 32, of bytes which, when combined together, form a description of the program. If the packet contains zero bytes, the existing line of description information will be erased. Each byte is an ASCII character in the range of 20h to 7Fh. Each packet of this type

30 provides one line of a multiple line description of the program. The description can contain any information the service provider chooses including: episode title, date of release, cast of characters, brief story synopsis, etc. By varying the number of packets of Description "N" type, efficient transmission of program

35 descriptions of any length is possible.

This is the replacement sheet

Date: 24 MAR 1987

3. Network Packet Class

Table 17 lists the assignment of Type codes for the Network packet class.

Table 17

Type Code	Function
00h	Unidentify Network
01h	Network Identifier
02h	Erase All Programs
03h	Network Name
04h	Call Letters
05h	Native Channel
06h	Tape Delay
07h	Special Qualifier 1
.	.
12h	Special Qualifier 12

3.1. "Unidentify Network" Packet Type

This packet contains zero bytes and indicates that the network is to be "unidentified". The effect is opposite to that of the "network identifier" packet (see section 3.2 below). After this packet is received, all subsequent packets of the Network class will be ignored until a network identifier packet is received. This packet type can be used as a signal that all network information has been sent.

3.2. "Network Identifier" Packet Type

This packet contains either zero or two bytes which define a receiver channel number for which network information is to be specified. The format of the bytes is the same as for the channel data field shown in Table 5 in section 2.2 above. The two byte channel field is optional. The receiver channel will default to the currently tuned channel if not specified. This field allows one channel to specify information for another channel.

This is the replacement sheet

Date: 24 MAR 1997

3.3. "Erase All Programs" Packet Type

5 This packet contains zero bytes, but indicates all of the program information for the specified network is to be completely deleted.

3.4. "Network Name" Packet Type

10 This packet contains a variable number, 0 to 32, of bytes which define the name of the broadcasting network. If the packet contains zero bytes, the existing network name is erased. Each byte is an ASCII character in the range of 20h to 7Fh. Each network should use a single unique name so that receivers can
15 access information regarding the network that is stored internal to the receiver, e.g. a network logo that can be displayed when a network is selected.

3.5. "Call Letters" Packet Type

20 This packet contains a variable number, 0 to 32, of bytes which define the "call" letters of the local broadcasting station. If the packet contains zero bytes, the existing call letters are erased. Each byte is an ASCII character in the range of 20h to
25 7Fh.

3.6. "Native Channel" Packet Type

30 This packet contains either zero or two bytes which define the "native" channel number, i.e. local "over-the-air" broadcast channel number, that is assigned to a station. This information is useful if a cable channel number assigned to a station differs from the station's over-the-air broadcast channel number. If the packet contains zero bytes, the existing native
35 channel number is erased. The format of the bytes is the same as for the channel field listed in Table 5 in section 2.2 above.

This is the replacement sheet

Date: 24 MAR 1997

3.7. "Tape Delay" Packet Type

5 This packet contains either zero or one byte which defines the number of half hours the local station routinely tape delays network programs. If the packet contains zero bytes, the existing tape delay information is erased. The data is not ASCII data so bit #6 is always set to logic 1. The format of the data byte in this packet is shown in Table 18.

10

Table 18

b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
1	S	d ₄	d ₃	d ₂	d ₁	d ₀

15

The delay field (d₄-d₀ in Table 18) has a valid range from 0 to 31, which represents time values from 0 hours and 0 minutes to 15 hours and 30 minutes in 30 minute increments.

20 The "S" bit is a sign bit, and determines if the delay value is to be added to the expected program start time ("S" = 0) or subtracted from it ("S" = 1). This delay would apply to all programs on the channel which have the "T" bit set in their program identifier information (see Table 5 in section 2.2 above). The delay value

25 defaults to zero if not specified.

3.8. "Special Qualifier 'N'" Packet Type

These packets each contain a variable number, 0 to 32, of bytes which define the text to be associated with the "special" bytes listed in Table 12 that may be used for specifying program information. If the packet contains zero bytes, the text associated with a "special" byte is erased. Each byte in this packet type is an ASCII character in the range of 20h to 7Fh. Each packet provides

30 text for one network specific "special" program information byte. For example, a station which offers mostly sports may define its

35

This is the replacement sheet

Date: 24 MAR 1997

first five "special" bytes to represent sports such as: Poker, SCUBA, Hang Gliding, Americas Cup, and Olympics. However, a station which offers mostly music may define its first five "special" bytes to represent types of music such as: Heavy Metal, Rap, Pop, Country, and Disco. The meaning of the "special" bytes can be redefined by the network at any time. If no text is received to define a "special" byte, the byte will default to a single blank space.

4. Miscellaneous Packet Class

Table 19 lists the assignment of Type codes for the Miscellaneous packet class.

Table 19

Type Code	Function
01h	Time of Day
02h	Time Zone
03h	Line Number
04h	No EDS
05h	Single EDS
06h	Directory EDS
07h	Program Pause
08h	Program Resume
09h	Impulse Capture

4.1. "Time of Day" Packet Type

This packet contains four data bytes which define the current time of day and date relative to Greenwich Mean Time. The format of the bytes is the same as that shown in Table 5 for the "program identifier" packet (see section 2.2 above), except that no channel data is needed. The "D" bit is used to determine if daylight savings time is currently being observed throughout the country. This information, along with the viewer's specified time zone and whether daylight savings time is locally observed, is used to determine the correct local time. Local time is only used

This is the replacement sheet

Date: 24 MAR 1997

to display the local time for the viewer. All internal timers and clocks should be kept in Greenwich Mean Time.

The "L" bit is used to determine if the current year is a leap year. This is needed to determine if the local day is February 28th or 29th when it is March 1st Greenwich Mean Time. The "Z" bit is used to determine if the current time in seconds should be reset to zero. This allows the time of day to be correct without transmitting the full six bits of data to specify the current number of seconds. The "T" bit is used to determine if the program is subject to a local tape delay. If this bit is set, the time of day clock should not be updated.

4.2. "Time Zone" Packet Type

This packet contains one byte which defines the viewer's time zone and daylight savings status. The data is not ASCII data so bit #6 is always set. The format of the single data byte is shown in Table 20.

Table 20

b ₇	b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
1	D	h ₄	h ₃	h ₂	h ₁	h ₀	

The hour data field (bits h₄-h₀ in Table 20) has a valid range from 0 to 23 and represents the nominal delay in hours relative to GMT. The "D" bit determines if daylight savings time is to be observed. This packet should only be sent when all possible viewers reside in the same time zone.

4.3. "Line Number" Packet Type

This packet contains one byte which defines the current line number and field for the tuned channel. This data is

This is the replacement sheet

Date: 24 MAR 1997

not ASCII data so bit #6 is always set. The format of the byte is shown in Table 21.

5

Table 21

b ₆	b ₅	b ₄	b ₃	b ₂	b ₁	b ₀
1	F	L ₄	L ₃	L ₂	L ₁	L ₀

10

The "line" field (bits L₄-L₀ in Table 21) has a valid range from 7 to 31. The "F" bit determines if the data is in TV field one ("F" = 0) or in field two ("F" = 1).

15 4.4. "No EDS" Packet Type

This packet contains zero bytes and indicates that the tuned channel has no extended data services information available.

20

4.5. "Single EDS" Packet Type

This packet contains zero bytes and indicates that the tuned channel has extended data services information available for a single channel.

25

4.6. "Directory EDS" Packet Type

This packet contains zero bytes and indicates that the tuned channel has extended data services information available for multiple channels. This information would be used to identify a station which provides a continuous directory of information about other channels.

30

35

This is the replacement sheet

Date: 24 MAR 1997

4.7. "Program Pause" Packet Type

5 This packet contains zero bytes and indicates that the current program on the tuned channel has been interrupted. It will need to be retransmitted at least once per minute to maintain a pause. This is because receivers will time-out after one minute even if no program resume packet is sent.

10 4.8. "Program Resume" Packet Type

This packet contains zero bytes and indicates that the current program on the tuned channel has resumed. It is used to immediately end a program pause. Receivers should perform an automatic program resume if one has not been received within
15 the last minute following a program pause.

4.9. "Impulse Capture" Packet Type

20 This packet contains either zero, eight, or ten bytes which define a program stop time and date, and start time and date, all relative to Greenwich Mean Time, and receiver channel number. If the packet contains zero bytes, existing information regarding impulse capture is erased. The format of the bytes is the same as for the "stop time" (see section 2.4) followed by the
25 "program identifier" (see section 2.2). This packet provides all the information needed to permit a program to be easily recorded. The program identifier bytes follow the stop time bytes because the program identifier contains a variable number of bytes. The "D", "L", and "Z" bits are ignored by the decoder when processing
30 this packet. The receiver channel will default to the currently tuned channel if not specified.

35 The signal format described above may be better understood by referring to Figure 4 which shows an example of the interleaving of CC and EDS data, and the nesting of EDS packets. In Figure 4, the first and second occurrences of line 21 in

This is the replacement sheet

Date: 24 MAR 1997

field 2 (lines labeled "1" and "2" on the left side of Figure 4) include closed caption or text data. In the third occurrence of line 21 in field 2, packet "A" of EDS data begins with a control code (CHAR #1) and a type code (CHAR #2). The fourth occurrence of line 21 includes EDS data that is part of packet "A". The fifth, sixth, and seventh occurrences of line 21 in field 2 are closed caption data. Because the EDS data at the start of packet A acts as a break in the CC data, the CC data at line 5 in Figure 4 begins with a "resume closed caption" control code to distinguish the closed caption data from the EDS data.

A second EDS packet, labeled packet "B" in Figure 4, begins at the eighth occurrence of line 21 and ends at the tenth occurrence of line 21. Packet "B" is nested within packet "A" which continues at the eleventh occurrence of line 21 with a "continue" control code. Packet "A" ends at the thirteenth occurrence of line 21. The end of packet "A" could be followed by another EDS packet, closed caption data, or "null" characters, i.e., no data.

A video signal including EDS information in the format described above can be generated using the exemplary system shown in Figure 5. Referring to Figure 5, video signal source 510 providing signal SOURCE may be a video tape recorder or video camera. Signals LINE21 and FIELD from unit 510 correspond to signals of the same name in Figure 2 and synchronize the operation of the system in Figure 5 to signal VIDEO. Microprocessor 520 receives EDS and CC input data identified as EDS INPUT and CC INPUT, respectively, in Figure 5 and formats it into serial data signal SERIAL DATA. The CC and EDS input data may be generated, for example, by someone typing CC and/or EDS information such as a program title at a keyboard.

MUX 530 selectively couples either signal SOURCE or signal SERIAL DATA to transmitter 540 in response to signal SELECT from microprocessor 520. Transmitter 540 transmits signal VIDEO over cable or by broadcasting. Output signal VIDEO in Figure 5 corresponds to signal VIDEO in Figure 2. CC and EDS data is inserted into signal VIDEO in Figure 5 by the operation of

This is the replacement sheet

Date: 24 MAR 1997

MUX 530. When CC or EDS data is to be inserted, microprocessor 520 detects an occurrence of line 21 in the appropriate field via signals LINE21 and FIELD and generates signal SELECT to cause MUX 530 to couple signal SERIAL DATA to transmitter 540.

- 5 Microprocessor 520 then outputs the CC or EDS data on signal SERIAL DATA causing the CC or EDS data to be included in signal VIDEO via transmitter 540.

- Microprocessor 540 controls the priority of insertion of CC and EDS data. For example, CC data has higher priority than
10 EDS data because a closed caption display should be synchronized with the actual speech in the video signal. The CC data must be transmitted as required to maintain the desired synchronization. EDS data, however, may be transmitted whenever line 21 intervals are not being used for CC data.

- 15 Various modifications of the features described above are possible. For example, future modifications of FCC requirements may permit EDS data to be included in video lines other than line 21 of field 2. In addition, packet classes and types in addition to those described above may be defined. For
20 example, the "reserved" control codes in Table 4 and the "undefined" type codes may be defined in the future. These and other modifications are intended to be within the scope of the following claims.

Claims

1. A television system comprising:
means for receiving a television signal partitioned into
5 line intervals which are organized in successive fields; said
television signal including auxiliary information in the form of a
predetermined number of data words occurring in at one line of at
3.5 least some of said fields; at least some of said data words
representing alphanumeric characters and at least some of said
10 data words representing control information;

means for extracting said data from said television
signal; and

means for examining said extracted data words to
determine when one of said extracted data words represent a
15 class of information as well as control information, thereafter
when one of said extracted data words represents a subclass of
information of said class of information, and thereafter decoding
said data words to obtain said information pertaining to said
subclass.

20

2. The television system defined in claim 1, wherein:
two data words occur in sequence in a predetermined
one of said line intervals; and

said means for examining examines the first of said
25 two data words which occur in said predetermined line to
determine if it represents a class of information as well as control
information, and examines the second of said two data words
which occur in said predetermined line to determine if it
represents a subclass of information.

30

3. The television system defined in claim 2, wherein:
said data words representing alphanumeric characters
are encoded in ASCII format.

This is the replacement sheet

Date: 24 MAR 1997



* C L M S *



-34-

4. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus comprising:

- means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal;
- means coupled to said extracting means for converting said extracted auxiliary information component from said predetermined line interval into binary data, said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data service information and being organized by packets of binary data, a packet of binary data being associated with a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class;
- means coupled to said converting means for decoding said binary data of said first field intervals to produce text display signals; and
- means coupled to said converting means for decoding said control code data of said second field interval to identify said particular class of auxiliary information.

25

5. The apparatus of claim 4 wherein said video signal provides video program information from one of a plurality of video channels and said plurality of auxiliary information classes comprises:

- a current program class including auxiliary information concerning a video program currently provided via one of said video channels; and
- a future program class including auxiliary information concerning a video program that will be provided via one of said video channels at a future time.

35

This is the replacement sheet

Date: 24 MAR 1997



6. The apparatus of claim 5 wherein said plurality of auxiliary information classes further comprises a source class including auxiliary information concerning the source of said video signal.

5

7. The apparatus of claim 5 wherein said plurality of auxiliary information classes further comprises a miscellaneous class including auxiliary information not included in said current program class and said future program class.

10

8. The apparatus of claim 5 wherein
said predetermined line interval within said second field intervals is a twenty-first line interval;

15 said binary data comprise first and second binary bytes; and

said decoding means decodes said first binary byte to identify said particular class of auxiliary information.

20 9. The apparatus of claim 8 wherein said first and second bytes occur successively during said predetermined line interval.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997



* C L M S *

10. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals. apparatus
5 comprising:
 means for extracting an auxiliary information component occurring during a predetermined interval within said first and second field intervals from said video signal;
 means coupled to said extracting means for converting
10 said extracted auxiliary information component from said predetermined line interval into binary data, said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data services information and being
15 organized by packets of binary data, a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class, a plurality of type data identifying respective subclasses of said particular class, and
20 information data corresponding to said subclasses;
 means coupled to said converting means for decoding said binary data of said first field intervals to produce text display signals; and
 means coupled to said converting means for decoding
25 said control code data and said type data of said second field to decode said information data.

11. The apparatus of claim 10 wherein one of said plurality of type data corresponds to program identification
30 information.

12. The apparatus of claim 11 wherein said program identification information comprises a time of day and a date at which said program will start.
35

This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997



* C L M S *

13. The apparatus of claim 10 wherein said video signal provides video program information from one of a plurality of video channels and said plurality of auxiliary information classes comprises:

5 a current program class including auxiliary information pertaining to a program currently provided via one of said video channels; and

10 a future program class including auxiliary information pertaining to a program that will be provided via one of said video channels at a future time.

14. The apparatus of claim 13 wherein the data packet corresponding to said current program class and said future program class each include respective program
15 identification type data.

15. The apparatus of claim 10 wherein one of said plurality of type data corresponds to a program title.

20 16. The apparatus of claim 10 wherein one of said plurality of type data corresponds to caption service information.

25 17. The apparatus of claim 10 wherein one of said plurality of type data corresponds to program description information.

30 18. The apparatus of claim 10 wherein one of said plurality of type data corresponds to network identification information.

19. The apparatus of claim 10 wherein one of said plurality of type data corresponds to network name information.

35 This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997



* C L M S *



-38-

20. The apparatus of claim 10 wherein said plurality of type data corresponds to line number information indicating which one of said plurality of horizontal line intervals in said first and second field intervals includes auxiliary information.

5

21. The apparatus of claim 10 wherein one of said plurality of type data corresponds to information indicating that extended data services information corresponding to other ones of said type data is not available in said video signal.

10

22. The apparatus of claim 10 wherein said video signal corresponds to a currently tuned one of a plurality of video channels and one of said plurality of type data corresponds to information indicating that said extended data services
15 information concerns only one of said plurality of video channels.

23. The apparatus of claim 10 wherein said video signal corresponds to a currently tuned one of a plurality of video channels and one of said plurality of type data corresponds to
20 information indicating that said extended data services information concerns at least one of said plurality of video channels.

24. The apparatus of claim 10 wherein
25 said predetermined line interval within said second field interval is a twenty-first line interval;
said binary data comprises first and second binary words; and
said decoding means decodes said second binary word
30 to identify said particular type of auxiliary information.

25. The apparatus of claim 24 wherein said first and second bytes occur successively during said predetermined line interval.

35

This is the replacement sheet

Date: 24 MAR 1997



* C L H S *

26. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus
- 5 comprising:
- means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal; and
 - a microprocessor coupled to said extracting means for
- 10 processing said extracted auxiliary information component in accordance with a sequence of instructions included in a control program; wherein
- said control program includes a first portion causing said microprocessor to convert said extracted auxiliary
- 15 information component from said predetermined line interval into binary data;
- said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data
- 20 services information and being organized by packets of binary data. a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class;
- said control program including a second portion causing said microprocessor to decode said binary data of said first field intervals to produce text display signals; and
 - said control program including a third portion causing said microprocessor to decode said control code data to identify
- 30 said particular class of auxiliary information.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997



* C L M S *

27. The apparatus of claim 26 wherein
said predetermined line interval within said second
field interval is a twenty-first line interval;

5 said binary data comprise first and second binary
words; and

said microprocessor decodes said first binary word to
determine said particular class of auxiliary information and
decodes said second binary word to identify said particular type
of auxiliary information.

10

28. The apparatus of claim 27 wherein said first and
second bytes occur successively during said predetermined line
interval.

This Sheet Has Been Replaced



* C L M S *

This is the replacement sheet

Date: 24 MAR 1997

29. In a system for processing a video signal including first and a second field intervals within each of a plurality of frame intervals and including a plurality of horizontal line intervals within each of said field intervals, apparatus comprising:

means for extracting an auxiliary information component occurring during a predetermined line interval within said first and second field intervals from said video signal; and

a microprocessor coupled to said extracting means for processing said extracted auxiliary information component in accordance with a sequence of instructions included in a control program; wherein

said control program includes a first portion causing said microprocessor to convert said extracted auxiliary information component from said predetermined line interval into binary data;

said binary data of said first field intervals being associated with closed caption text information, said binary data of said second field intervals being associated with extended data services information and being organized by packets of binary data, a packet of binary data representing auxiliary information included in a particular one of a plurality of classes of auxiliary information and including control code data identifying said particular class, a plurality of type data identifying respective subclasses of said particular class, and information data corresponding to said subclasses;

said control program including a second portion causing said microprocessor to decode said binary data of said first field intervals to produce text display signals; and

said control program including a third portion causing said microprocessor to decode said control code data and said type data of said second field intervals to decode said information data.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997



* C L H S *

30. The apparatus of claim 29 wherein
said binary data comprise first and second binary
words; and

5 said third portion of said control program causes said
microprocessor to 1) decode said first binary word to determine if
said binary codes represent said extended data services signal, 2)
further decode said first binary word of said binary codes
representing said extended data services signal to determine said
particular class of auxiliary information, and 3) decode said
10 second binary word to identify said particular type of auxilliary
information.

31. In a television system including means for
receiving television signals organized in successive field intervals.
15 each of said fields including a plurality of line intervals. auxiliary
data corresponding to closed caption information occurring in at
least one of said line intervals of at least some of said field
intervals, apparatus comprising:

means responsive to a selected one of said television
20 signals for extracting said data from said television signal; and
means responsive to said extracted data for
determining whether or not it corresponds to a control code
within a first control code range corresponding to closed caption
information or within a second code range corresponding to
25 extended data service information; said means being responsive to
said extracted data following the detection of a control code within
said first code range for processing said extracted data to produce
text representative display signals associated with a program
corresponding to a currently selected television signal; and said
30 means being responsive to said extracted data following the
detection of a control code within said second control code range
for determining the type of information represented by said
extracted data.

35

This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997



* C L M S *



-43-

32. The apparatus recited in claim 31, wherein:
data corresponding to said closed caption information
and data corresponding to said extended data service information
comprises first and second bytes which occur successively during
the same predetermined line interval of alternating first and
5 second types of fields; and
said means responsive to said extracted data is
responsive to first byte occurring during said predetermined line
interval to determine if it represents a control code within said
10 first control code range or a control code in said second control
code range; said means being responsive to said second byte
occurring during said predetermined line interval following a
determination that said first byte represents a control code within
said first control code range for processing said second byte to
15 produce text representative display signals associated with a
program corresponding to a currently selected television signal;
said means being responsive to said second byte occurring during
said predetermined line interval following a determination that
said first byte represents a control code within said second control
20 code range for determining the type of information represented
by said second byte.

33. The apparatus recited in claim 31, wherein:
said television signals are organized in alternating first
25 and second types of fields, data corresponding to said closed
caption information occurring in said first type of fields and data
corresponding to said extended data service information occurring
in said second type of fields;

means responsive to said selected television signal for
30 generating a field type indicating signal indicating the occurrence
of said first and second types of fields is additionally provided;
and

said means responsive to said extracted data is also
responsive to said field type indicating signal for determining if
35 acontrol code is within said first or second control code range.

This is the replacement sheet

Date: 24 MAR 1997



* C L M S *

34. The apparatus recited in claim 31, wherein:
said television signals are organized in alternating first
and second types of fields, data corresponding to said closed
caption information and data corresponding to said extended data
5 service information occurring during the same predetermined line
interval in said first and in said second type of fields;

means responsive to said selected television signal for
generating a line indicating signal indicating the occurrence of said
predetermined line during each of said first and second types of
10 fields is additionally provided; and

said means for extracting said data is also responsive
to said line indicating signal.

35. The apparatus recited in claim 34, wherein:
15 means responsive to said selected television signal for
generating a field type indicating signal indicating the occurrence
of said first and second types of fields is additionally provided;
and

said means responsive to said extracted data is also
20 responsive to said field type indicating signal.

36. The apparatus recited in claim 31, wherein:
at least some of said control codes within said second
control code range identify respective classes of information and
25 are included in respective packets of data, each packet also
including a plurality of type codes identifying respective ones of a
plurality of subclasses of information, said type codes being
followed by respective data words representing information
associated with respective subclasses.

30

37. The apparatus recited in claim 36, wherein:
said control codes within said second control code
range also indicating whether a new packet has been started, a
previously identified packet is continuing or a previously
35 identified packet is terminating.

This Sheet Has Been Replaced



This is the replacement sheet

Date: 24 MAR 1997



* C L M S *

AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING EXTENDED DATA SERVICES

ABSTRACT

A system for processing auxiliary video signals provides for decoding an extended data services signal in line 21 of field 2. Extended data services provide a general purpose video system information and control capability in addition to basic closed caption operation. Extended data services information is arranged in packets of data. Each packet provides information regarding current of future video programs, the source of the video program, and miscellaneous information such as time of day. The extended data services data may be decoded to control the operation of a video system including a videocassette recorder (VCR) and a television receiver.

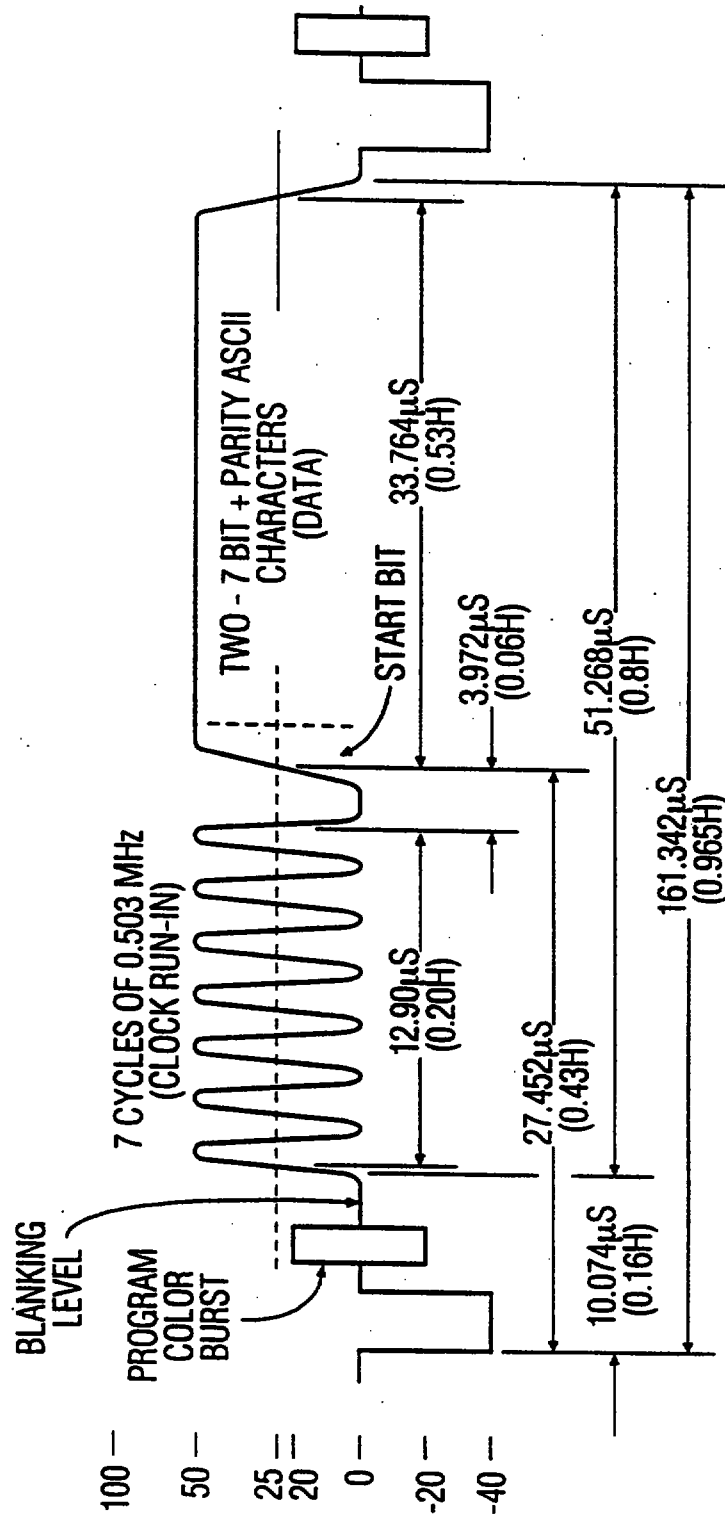
Figure 2

This Sheet Has Been Replaced



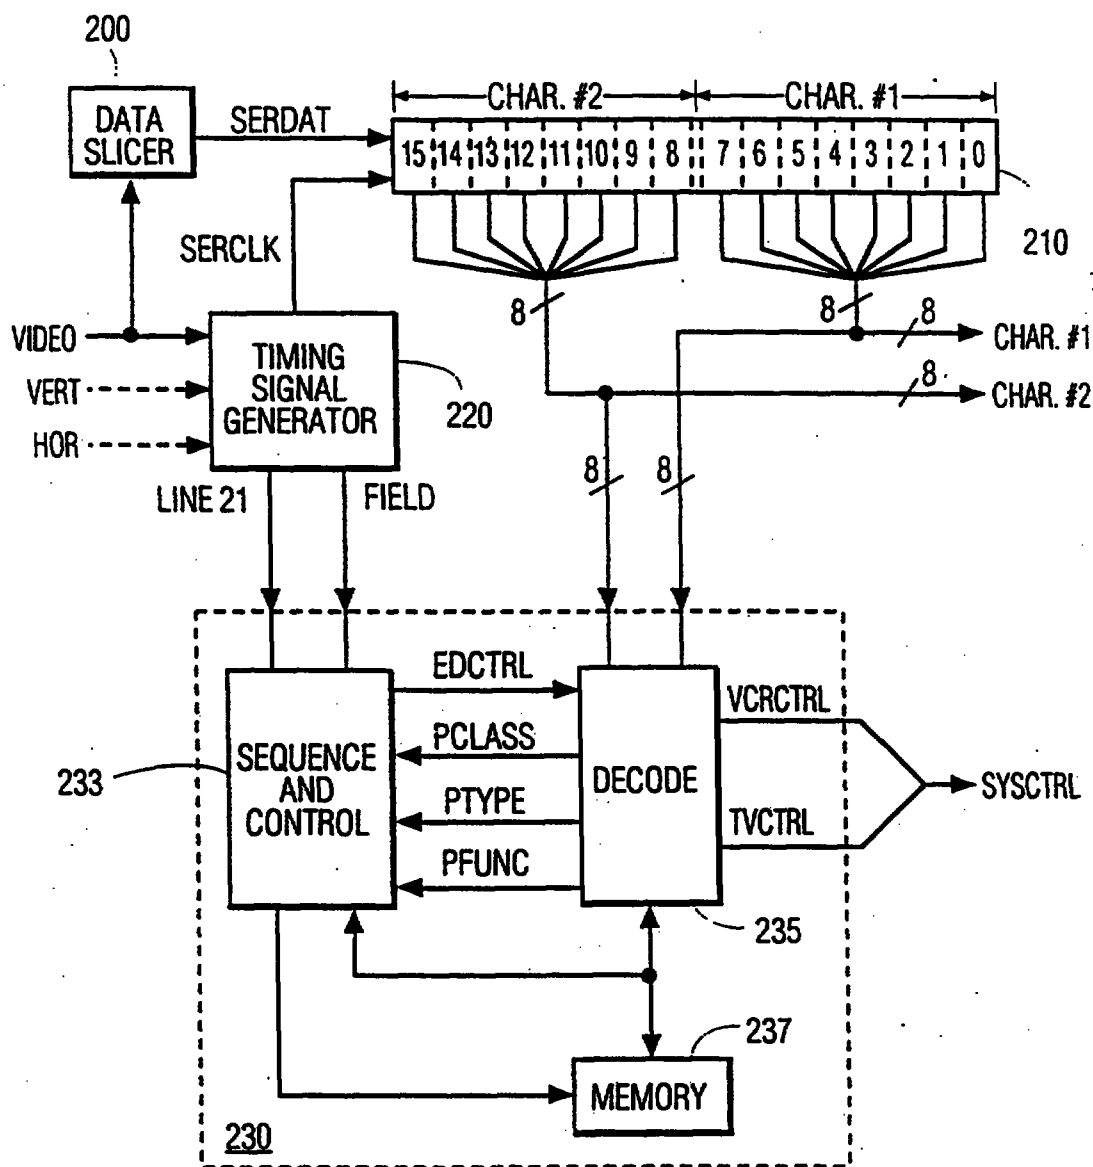
This is the replacement sheet

Date: 24 MAR 1997

**FIG. 1**

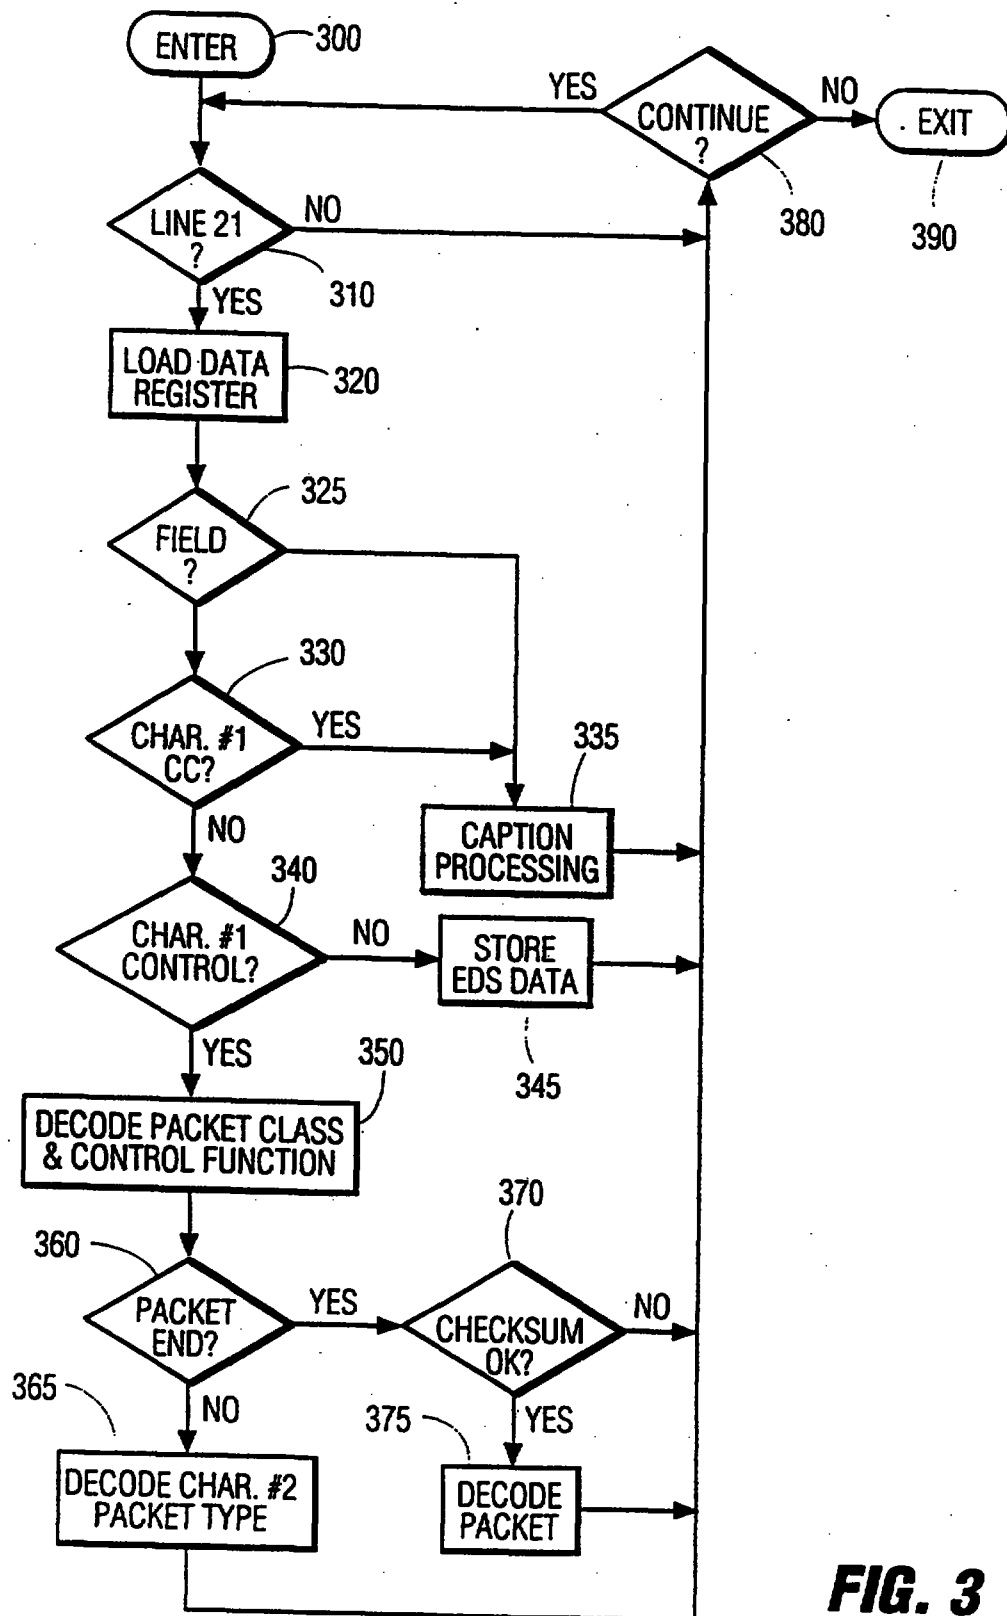
This is the replacement sheet

Date: 24 MAR 1997

**FIG. 2**

This is the replacement sheet

Date: 24 MAR 1997

**FIG. 3**

This is the replacement sheet

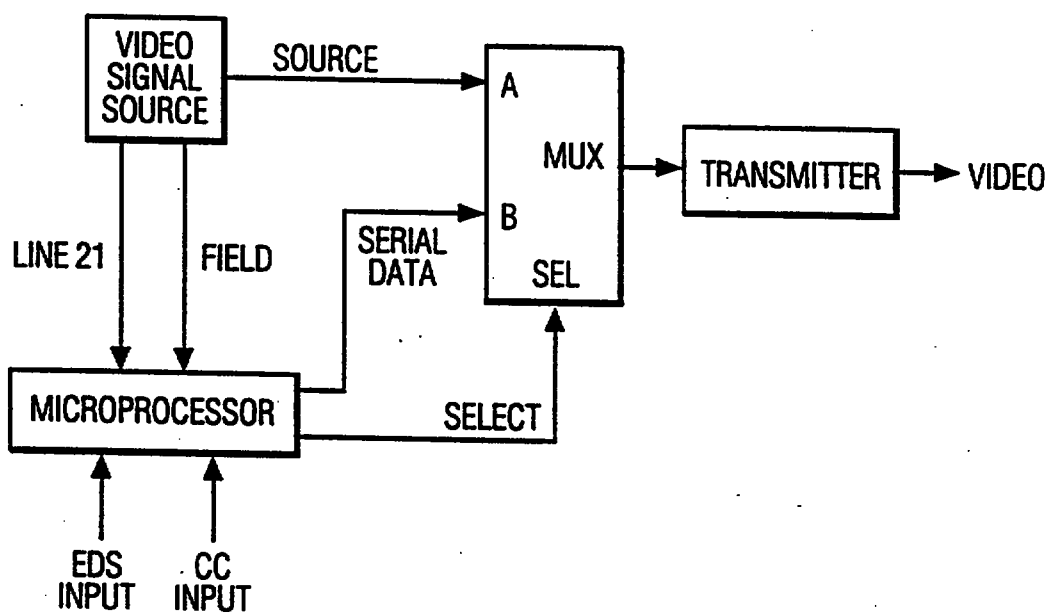
Date: 24 MAR 1997

OCCURRENCE OF LINE 21, FIELD 2	CHAR #1	CHAR #2	EDS PACKET
1	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
2	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
3	04h = EDS CONTROL CODE FUNCTION: START PACKET CLASS: FUTURE PROGRAM	01h = EDS TYPE CODE TYPE: PROGRAM IDENTIFIER	START A
4	04h = EDS DATA: MINUTE = 0	48h = EDS DATA: HOUR = 8	A
5	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
6	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
7	CC/TEXT INFORMATION	CC/TEXT INFORMATION	
8	01h = EDS CONTROL CODE FUNCTION: START PACKET CLASS: CURRENT PROGRAM	08h = EDS TYPE CODE TYPE: CAPTION SERVICES	START B
9	4Ch = EDS DATA ENGLISH CAPTIONING AVAILABLE IN CHANNEL 1 OF FIELD 2	48h = EDS DATA ENGLISH TEXT AVAILABLE IN CHANNEL 2 OF FIELD 1	B
10	03h = EDS CONTROL CODE FUNCTION: END PACKET CLASS: CURRENT PROGRAM	CHECKSUM	END B
11	05h = EDS CONTROL CODE FUNCTION: CONTINUE PACKET CLASS: FUTURE PROGRAM	42h = EDS DATA: DAY = 2 (CONTINUATION OF PROGRAM IDENTIFIER INFORMATION)	A
12	46h = EDS DATA: MONTH = 6 (CONTINUATION OF PROGRAM IDENTIFIER INFORMATION)	00h = NULL (NO DATA)	A
13	06h = EDS CONTROL CODE FUNCTION: END PACKET CLASS: FUTURE PROGRAM	CHECKSUM	END A

FIG. 4

This is the replacement sheet

Date: 24 MAR 1997

**FIG. 5**

This is the replacement sheet

Date: 24 MAR 1997

TEXT OF THE ABSTRACT

AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING EXTENDED DATA SERVICES

A system for processing auxiliary video signals provides for decoding an extended data services signal (210) in line 21 of field 2. Extended data services provide a general purpose video system information and control capability in addition to basic closed caption operation. Extended data services information is arranged in packets of data. Each packet provides information regarding current or future video programs, the source of the video program, and miscellaneous information such as time of day. The extended data services data may be decoded to control the operation of a video system including a videocassette recorder (VCR) and a television receiver.

Figure 2

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET
23 APR 1999

This Sheet Has Been Replaced



What is claimed :-

REPLACEMENT SHEETS		SG
☐	Description : paged	to paged
☒	Claim(s) : paged	to paged
☐	Drawing(s) : paged	to paged
☒	Abstract : paged	to paged
DATE OF RECEIPT		5/11/11

1. Television apparatus comprising:
 means for receiving a television signal including auxiliary information
 comprising data words; and
 means for processing a first one of said data words for determining
 control information for controlling processing of said data words and also for
 determining a class of information to be displayed on a display device; said processing
 means processing a second one of said data words for determining a subclass of said
 class of information to be displayed; and said processing means processing a third one
 of said data words to obtain said information pertaining to said subclass of said class of
 information to be displayed.

2. The television apparatus of claim 1 wherein
 said television signal includes television program information from one
 of a plurality of television channels; and
 said class of information determined from said first data word indicates
 an association of information represented by said third data word with a class of said
 television program information; one of said classes of information provided by said data
 words being a current program class of data for providing information relating to
 television program information currently being provided via one of said plurality of
 television channels.

3. The television apparatus of claim 2 wherein said class of information
 determined from said first data word is a future program class indicating that said third
 data word provides information concerning a television program that will be provided
 via one of said plurality of television channels at a future time.

4. The television apparatus of claim 3 wherein said first and second data
 words comprise respective first and second data bytes encoded in non-ASCII format
 and said third data word comprises a third data byte encoded in ASCII format for
 representing an alphanumeric character.

5. The television apparatus of claim 3 wherein said second data word
 represents a particular subclass of information and said particular subclass of
 information indicates that a television signal from a currently tuned one of said plurality
 of television channels includes no subclasses of auxiliary information other than said
 particular subclass.

This is the replacement sheet

Date: 5 AUG 1009



6. The television apparatus of claim 3 wherein said subclass determined from said second data word indicates that said auxiliary information included in said television signal provides information relating to only one of said plurality of television channels.

7. The television apparatus of claim 3 wherein said subclass determined from said second data word indicates that said auxiliary information included in said television signal provides information relating to more than one of said plurality of television channels.

8. The television apparatus of claim 3 wherein said television signal is partitioned into line intervals which are organized in successive fields; said first, second and third data words occurring successively in one of said line intervals in one of said fields.

9. Television apparatus comprising:

means for receiving a television signal including television program information and auxiliary information, said auxiliary information comprising data words; and

means for processing a first one of said data words for determining control information for controlling processing of said data words and also for determining a class of said television program information with which information represented by said data words is associated; said processing means processing a second one of said data words for determining a subclass of said class of television program information with which said information represented by said data words is associated; and said processing means processing a third one of said data words to obtain information pertaining to said subclass.

10. Television apparatus of claim 9 wherein said class of information determined from said first data word comprises one of a current program class and a future program class; said current program class indicating that information represented by said third data word relates to television program information currently included in said television signal; said future program class indicating that information represented by said third data word relates to television program information to be included in said television signal at a future time.



This is the replacement sheet

Date: 25 AUG 1989

11. The television apparatus of claim 10 wherein said information represented by said third data word comprises information regarding said television program information that is intended for display on a display device.

12. The television apparatus of claim 11 wherein said television signal is partitioned into line intervals which are organized in successive fields; said first and second data words occurring successively in one of said line intervals in one of said fields; said third data word occurring during another one of said line intervals during another one of said fields.

13. The television apparatus of claim 12 wherein each of said first, second and third data words comprises a respective one of first, second and third data bytes; said first and second data bytes being encoded in non-ASCII format and said third data byte being encoded in ASCII format for representing an alphanumeric character.

14. Television apparatus comprising:

means for receiving a television signal including television program information and including auxiliary information comprising a plurality of data words included in a data packet; said plurality of data words including first, second and third data words occurring successively in the order named in said data packet;

means for processing said first data word for determining control information for controlling processing of said third data word and also for determining a class of said television program information with which information represented by said third data word is associated; said processing means processing said second data word for determining a subclass of said class of television program information; and said processing means processing said third data word to obtain information pertaining to said subclass.

15. The television apparatus of claim 14 wherein said class of information determined from said first data word comprises one of a current program class and a future program class; said current program class indicating that information represented by said third data word relates to television program information currently included in said television signal; said future program class indicating that information represented by said third data word relates to television program information to be included in said television signal at a future time.



This is the replacement sheet

Date:

5 AUG 1999

16. The television apparatus of claim 15 wherein said information represented by said third data word comprises information regarding said television program information that is intended for display on a display device.

17. The television apparatus of claim 16 wherein said television signal is partitioned into line intervals which are organized in successive fields; said first and second data words occurring successively in one of said line intervals in one of said fields; said third data word occurring during another one of said line intervals during another one of said fields.

18. The television apparatus of claim 17 wherein each of said first, second and third data words comprises a respective one of first, second and third data bytes; said first and second data bytes being encoded in non-ASCII format and said third data byte being encoded in ASCII format for representing an alphanumeric character.

19. Television apparatus comprising:

means for receiving a television signal partitioned into line intervals which are organized in successive fields; said television signal including television program information and including auxiliary information comprising a plurality of data bytes organized in a data packet; said plurality of data bytes including first, second and third data bytes occurring successively in the order named in said data packet; said first and second data bytes occurring during one of said line intervals during one of said fields and said third data byte occurring during another one of said line intervals during another one of said fields; and

means for processing said first data byte for determining control information for controlling processing of said third data byte and also for determining a class of said television program information with which information included in said third data byte is associated; said processing means processing said second data byte for determining a subclass of said class of television program information; said processing means processing said third data byte to obtain information pertaining to said subclass.



This is the replacement sheet

Date: 5 AUG 1999

20. The television apparatus of claim 19 wherein said class of information determined from said first data byte comprises one of a current program class and a future program class; said current program class indicating that information represented by said third data byte relates to television program information currently included in said television signal; said future program class indicating that information represented by said third data byte relates to television program information to be included in said television signal at a future time.

21. The television apparatus of claim 20 wherein said information represented by said third data byte comprises information regarding said television program information that is intended for display on a display device.

22. The television apparatus of claim 21 wherein said television signal is partitioned into line intervals which are organized in successive fields; said first and second data bytes occurring successively in one of said line intervals in one of said fields; said third data byte occurring during another one of said line intervals during another one of said fields.

23. The television apparatus of claim 22 wherein each of said first, second and third data words comprises a respective one of first, second and third data bytes; said first and second data bytes being encoded in non-ASCII format and said third data byte being encoded in ASCII format for representing an alphanumeric character.

24. A method of processing a television signal including television program information and including auxiliary information comprising data words; said method comprising the steps of:

receiving said television signal;

processing a first one of said data words for determining control information for controlling processing of said data words;

determining from said first one of said data words a class of said television program information with which information included in said data words is associated;

processing a second one of said data words for determining a subclass of said class of television program information with which said information included in said data words is associated; and

decoding a third one of said data words to obtain decoded information pertaining to said subclass.



This is the replacement sheet

- 5 AUG 1999

Date:

25. The method of claim 24 wherein said class of information determined from said first data word comprises one of a current program class and a future program class; said current program class indicating that information represented by said third data word relates to television program information currently included in said television signal; said future program class indicating that information represented by said third data word relates to television program information to be included in said television signal at a future time.

26. The method of claim 25 further comprises the step of displaying the information decoded from said third data word on a display device.

27. The method of claim 26 wherein said television signal is partitioned into line intervals which are organized in successive fields; said first and second data words occur successively in one of said line intervals in one of said fields; said third data word occurs during another one of said line intervals during another one of said fields.

28. The method of claim 27 wherein each of said first, second and third data words comprises a respective one of first, second and third data bytes; said first and second data bytes being encoded in non-ASCII format and said third data byte being encoded in ASCII format for representing an alphanumeric character.



This is the replacement sheet

Date: - 5 AUG 1999

29. A method of processing a television signal including television program information and including auxiliary information comprising a plurality of data packets, each of said data packets including a plurality of data words; said method comprising the steps of:

receiving said television signal;

processing a first data word included in a first one of said plurality of data packets for determining control information for controlling processing of said plurality of data words included in said first data packet and also for determining a class of said television program information with which information included in said first data packet is associated;

processing a second data word included in said first data packet for determining a subclass of said class of television program information with which said information included in said first data packet is associated;

receiving a first data word of a second one of said plurality of data packets after processing said first and second data words of said first data packet and before completing processing of said first data packet;

interrupting processing of said first data packet in response to receiving a first data word of a second one of said plurality of data packets; and

processing said second data packet.

30. The method of claim 29 further comprising the steps of:

completing processing of said second data packet; and

resuming processing of said first data packet.

31. The method of claim 29 wherein the step of interrupting processing of said first data packet comprises the step of aborting processing of said first data packet.



This is the replacement sheet

Date: - 5 AUG 1999

32. A method of processing a television signal comprising the steps of:
 receiving a television signal including television program information
 and including auxiliary information arranged in packets of digital words;
 processing a digital control word included in a first data packet for
 determining control information;
 determining from said control word a class of said television program
 information with which a digital data word included in said first data packet is
 associated;
 decoding said data word included in said first data packet in response to
 said control information for determining information pertaining to said class of said
 television program information;
 storing information decoded from said data word in a memory:-
 erasing said decoded information stored in said memory in response to
 receiving a second packet comprising a digital control word and no data word.

33. The method of claim 32 wherein control information produced by
 processing said digital control word included in said first data packet is substantially the
 same as control information produced by processing said digital control word included
 in said second data packet.

34. The method of claim 33 wherein each of said digital control words
 comprises a respective pair of data bytes; a first data byte of said pair of data bytes
 included in said first data packet exhibits a binary value equal to a binary value of a
 first data byte of said pair of data bytes included in said second data packet; a second
 data byte of said pair of data bytes included in said first data packet exhibits a binary
 value equal to a binary value of a second data byte of said pair of data bytes included in
 said second data packet.



This is the replacement sheet

Date: 5 AUG 1999

35. Television apparatus comprising:

means for generating a signal representing television program information;

means for generating an auxiliary information signal comprising first, second and third data words; said first data word providing control information for controlling processing of said third data word and also indicating a class of said television program information; said second data word indicating a subclass of said class of said television program information; said third data word representing information pertaining to said subclass of said television program information;

means for combining said signal representing television program information and said auxiliary information signal to produce a television signal.

36. The apparatus of claim 35 wherein said class of information provided by said first data word comprises one of a current program class and a future program class; said current program class indicating that information represented by said third data word relates to television program information currently included in said television signal; said future program class indicating that information represented by said third data word relates to television program information to be included in said television signal at a future time.

37. The television apparatus of claim 36 wherein said television signal is partitioned into line intervals which are organized in successive fields; said first and second data words occur successively in one of said line intervals in one of said fields; said third data word occurs during another one of said line intervals during another one of said fields.



This is the replacement sheet

Date: 5 AUG 1999

38. Television apparatus comprising:

means for receiving a television signal including television program information and including auxiliary information comprising data words; and

means for processing a first one of said data words for determining whether said data word represents a control code within a first control code range or a control code within a second control code range; said processing means being responsive to said first data word representing said control code within said first control code range for processing said data words to produce information associated with television program information currently included in said television signal; said processing means being responsive to said first data word representing said control code within said second control code range for processing said first data word for determining a class of said television program information with which information included in said data words is associated; said processing means being responsive to said first data word representing said control code within said second control code range for processing a second one of said data words for determining a subclass of said class of television program information with which said information included in said data words is associated; said processing means being responsive to said first data word representing said control code within said second control code range for processing a third one of said data words to obtain information pertaining to said subclass.

39. Television apparatus of claim 38 wherein said class of information determined from said first data word in response to said first data word representing said control code in said second control code range comprises one of a current program class and a future program class; said current program class indicating that information represented by said third data word relates to television program information currently included in said television signal; said future program class indicating that information represented by said third data word relates to television program information to be included in said television signal at a future time.

40. The television apparatus of claim 39 wherein said first data word representing said control code in said first control code range indicates that data words occurring subsequent to said first data word represent closed caption information and said first control code representing said control code in said second control code range indicates that data words occurring subsequent to said first data word represent extended data services information.

This is the replacement sheet



Date: - 5 AUG 1999

AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING EXTENDED DATA SERVICES

ABSTRACT

A system for processing auxiliary video signals provides for decoding an extended data services signal in line 21 of field 2. Extended data services provide a general purpose video system information and control capability in addition to basic closed caption operation. Extended data services information is arranged in packets of data. Each packet provides information regarding current or future video programs, the source of the video program, and miscellaneous information such as time of day. The extended data services data may be decoded to control the operation of a video system including a videocassette recorder (VCR) and a television receiver.

Figure 2

This is the replacement sheet

Date: - 5 AUG 1999

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

International Patent Classification ⁵ :

H04N 7/087

A1

(11) International Publication Number:

WO 93/22876

(43) International Publication Date:

11 November 1993 (11.11.93)

(21) International Application Number: PCT/US93/03988

(22) International Filing Date: 28 April 1993 (28.04.93)

(30) Priority data:

9209147.9

28 April 1992 (28.04.92)

GB

(71) Applicant (for all designated States except US): THOMSON
CONSUMER ELECTRONICS, INC. [US/US]; 600
North Sherman Drive, Indianapolis, IN 46201 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LANDIS, Michael, David
[US/US]; 9966 Aegean Road, Fishers, IN 46038 (US).(74) Agents: TRIPOLI, Joseph, S. et al.; GE & RCA Licensing
Management Operation, Inc., CN 5312, Princeton, NJ
08540 (US).(81) Designated States: BR, CA, FI, JP, KR, US, European pa-
tent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE).

Published

With international search report.

Before the expiration of the time limit for amending the
claims and to be republished in the event of the receipt of
amendments.

REPLACED SHEETS SG

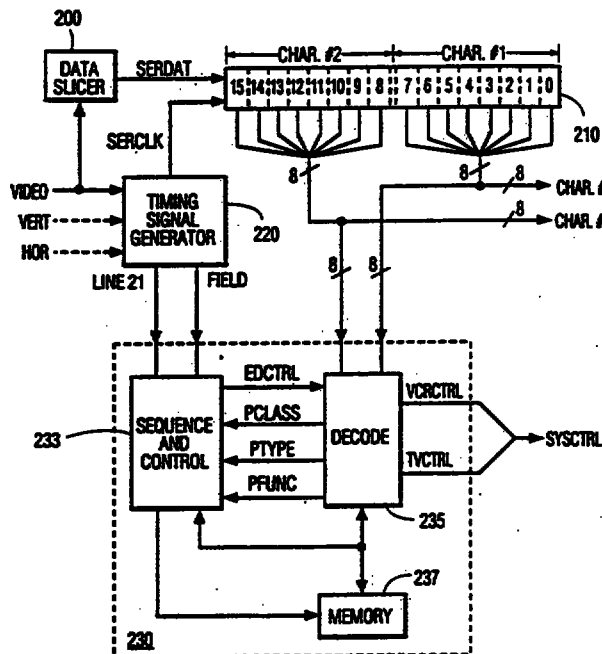
- ☒ Description : paged to paged
☒ Claim(s) : paged to paged
☒ Drawing(s) : paged to paged
☒ Abstract : paged to paged

DATE OF RECEIPT

This Sheet Has Been Replaced



(54) Title: AUXILIARY VIDEO INFORMATION SYSTEM INCLUDING EXTENDED DATA SERVICES



(57) Abstract

A system for processing auxiliary video signals provides for decoding an extended data services signal in line 21 of field 2. Extended data services provide a general purpose video system information and control capability in addition to basic closed caption operation. Extended data services information is arranged in packets of data. Each packet provides information regarding current or future video programs, the source of the video program, and miscellaneous information such as time of day. The extended data services data may be decoded to control the operation of a video system including a videocassette recorder (VCR) and a television receiver.