(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
13 September 2007 (13.09.2007)

PCT

(10) International Publication Number
WO 2007/103656 A1

(51) International Patent Classification:
E21B 23/02 (2006.01) *E21B 33/12* (2006.01)

(21) International Application Number:
PCT/US2007/062852

(22) International Filing Date:
27 February 2007 (27.02.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/365,709 1 March 2006 (01.03.2006) US

(71) Applicant *(for all designated States except US)*: **BAKER HUGHES INCORPORATED** [US/US]; P.O. Box 4740, Houston, TX 77027 (US).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **SORHUS, Atle, J.** [NO/US]; Gamleveien 2, N-4018 Stavanger (NO).


(74) Agent: **PORTER, Andre, J.**; Division Intellectual Property Counsel, Baker Oil Tools Division-Baker Hughes Incorporated, P.O. Box 4740, Houston, TX 77027 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: MILLABLE PRE-INSTALLED PLUG

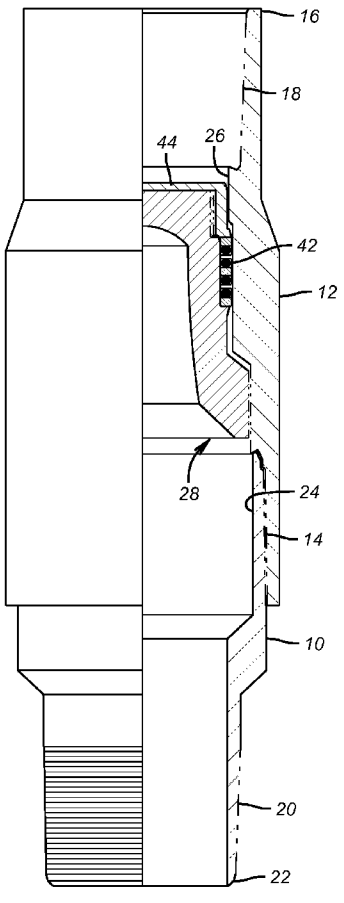

(57) Abstract: A tubing plug (28) is preinstalled in a premium connection that allows support for the plug outside the drift dimension of the tubulars above and below. The plug is supported in a rotationally locked manner to avoid turning when being milled out. The plug shape internally comprises gentle sloping walls rather than surfaces in alignment with the longitudinal axis of the tubular to allow smaller cuttings to be produced that can be caught on a magnetic sub or circulated to the surface. Because the plug is supported in a zone outside the drift dimension of the adjacent tubulars, milling out the plug does not reduce the drift of the tubular assembly in which the plug was initially mounted. Seals can be provided for bubble tight sealing around the plug.

WO 2007/103656 A1

RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.