

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 October 2004 (14.10.2004)


PCT

(10) International Publication Number
WO 2004/088381 A1

- (51) International Patent Classification⁷: **G02B 6/42**, H05K 9/00, H01R 23/68, 13/658
- (21) International Application Number: PCT/US2004/009494
- (22) International Filing Date: 30 March 2004 (30.03.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/459,093 31 March 2003 (31.03.2003) US
- (71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).
- (72) Inventors: **LLOYD, Brian, Keith**; 11 Hornrimme Court, Maumelle, AR 72113 (US). **CRANE, John, Reginald**; 19348 Crane Drive, Little Rock, AR 72206 (US).
- (74) Agent: **PAULIUS, Thomas, D.**; Molex Incorporated, 222 Wellington Court, Lisle, IL 60532 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,

[Continued on next page]

(54) Title: SHIELDING CAGE WITH MULTIPLE MODULE-RECEIVING BAYS

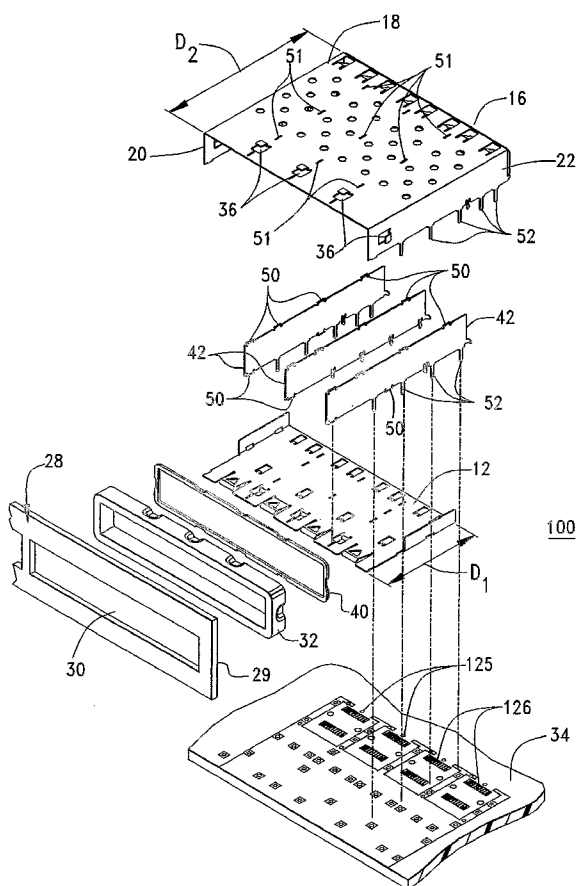

(57) Abstract: An electromagnetic interference (EMI) shielding cage for an electronic module is comprised an electrically-conductive bottom, an electrically-conductive rear panel electrically coupled to said bottom, an electrically-conductive, elongated cover electrically coupled to said bottom and first and second side walls that are electrically and mechanically coupled to said bottom, said rear panel and said elongated cover. Numerous ground lugs, electrically coupled to at least one of: said bottom; rear panel; and first and second side walls provide an electrical pathway for EMI signals to a reference potential. An electrically-conductive, compressible gasket encircling the bottom, top and side walls provides an electrical connection to a front panel, providing additional EMI suppression. Gasket engagement tabs in the top and bottom provide electrical connection between the gasket and panels.



TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*