



(51) International Patent Classification:
E21B 34/02 (2006.01) *E21B 33/068* (2006.01)

(21) International Application Number:
PCT/EP2011/052137

(22) International Filing Date:
14 February 2011 (14.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20100222 15 February 2010 (15.02.2010) NO

(71) Applicant (for all designated States except US):
Petroleum Technology Company AS [NO/NO]; Slettestrandveien 13, N-4032 Stavanger (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TVEITEN, Magnar** [NO/NO]; Bauneveien 7a, N-4328 Sandnes (NO). **KLEPPA, Erling** [NO/NO]; Klovsteinsveien 17, N-4100 Jørpeland (NO). **STOKKA, Øyvind** [NO/NO]; Veslefrikkvegen 11, N-4315 Sandnes (NO).

(74) Agents: **LANGAN, Hans** et al.; c/o ONSAGERS AS, P.O.Box 6963, N-0130 Oslo (NO).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VALVE DEVICE

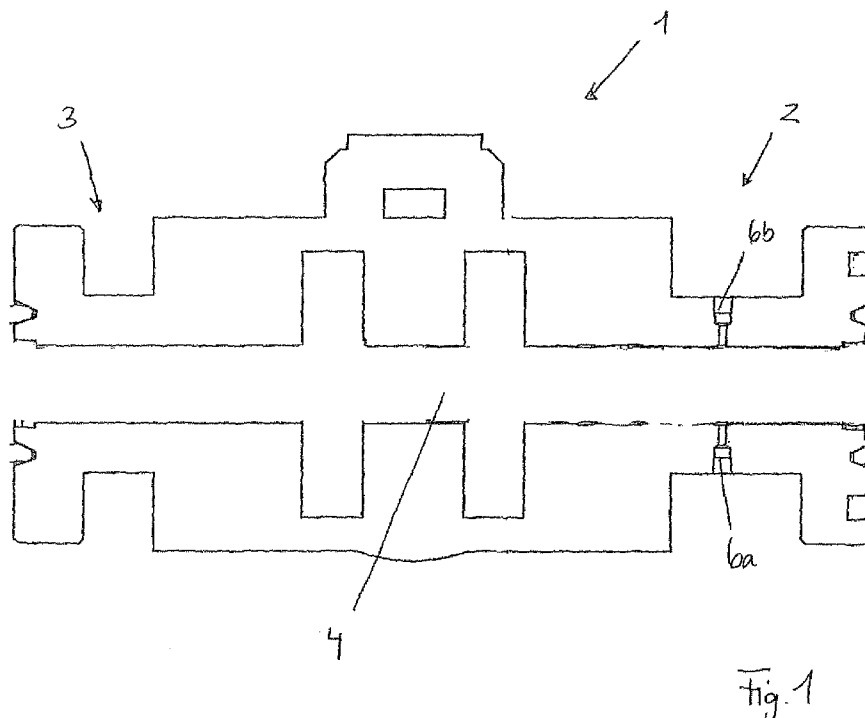

(57) Abstract: The present invention relates to a valve (1) comprising at least one flange portion (2, 3) for securing to a wellhead Christmas tree (5) for shutting off a pipe outlet (50) from the wellhead Christmas tree (5). According to the invention at least one of the flange portions (2) comprises integrated devices (6a, 6b, 6, 14, 15) for operation of a second unit (10) mounted outside the valve (1).