

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
10 October 2019 (10.10.2019)



(10) International Publication Number
WO 2019/194711 A1

(51) International Patent Classification:

H04L 1/18 (2006.01) *H04L 5/00* (2006.01)
H04W 52/14 (2009.01) *H04L 1/00* (2006.01)
H04W 52/32 (2009.01)

(21) International Application Number:

PCT/SE2018/050362

(22) International Filing Date:

06 April 2018 (06.04.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)** [SE/SE]; Torshamnsgatan 23, 164 83 Stockholm (SE).

(72) Inventor: **BALDEMAIR, Robert**; Honnörsgatan 16, SE-170 69 SOLNA (SE).

(74) Agent: **BOU FAICAL, Roger**; Ericsson AB, Patent Unit Kista RAN 1, SE- 164 80 Stockholm (SE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,

(54) Title: POWER CONTROL FOR FEEDBACK SIGNALING

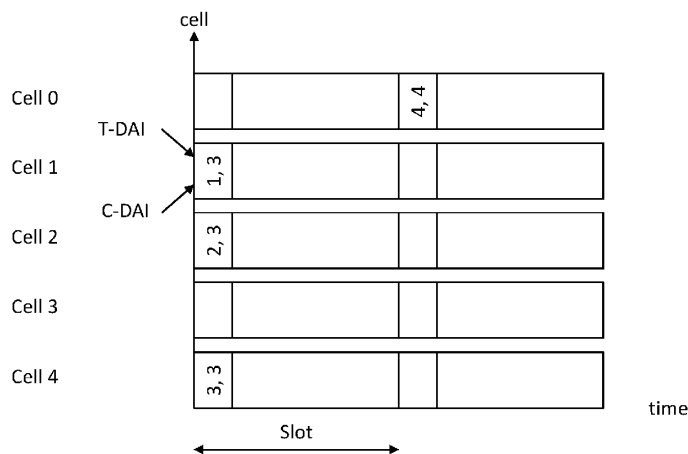


Fig. 1

(57) Abstract: A method of operating a user equipment (10) in a radio access network is disclosed. The method comprises transmitting feedback signaling pertaining to a plurality of cells, the feedback signaling being transmitted at a power level, the power level being based on a difference between a value V and a value U, the value V being indicative of the total number of scheduling assignments the user equipment (10) is expected to receive for the plurality of cells, and the value U being indicative of the 1395 total number of scheduling assignments for the plurality of cells received by the user equipment (10). The disclosure also pertains to related devices and methods.

[Continued on next page]

MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE*