

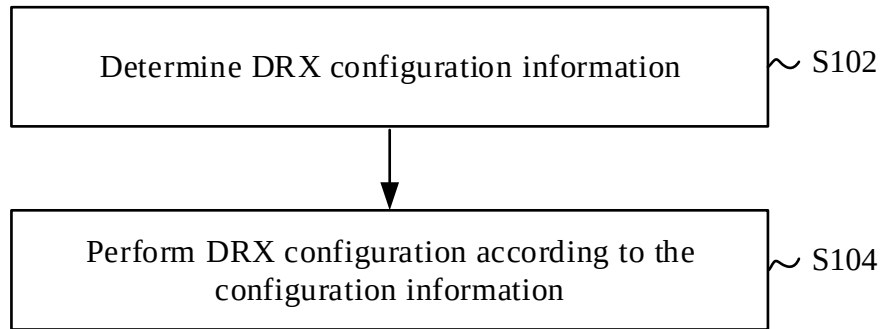
100

FIG. 1

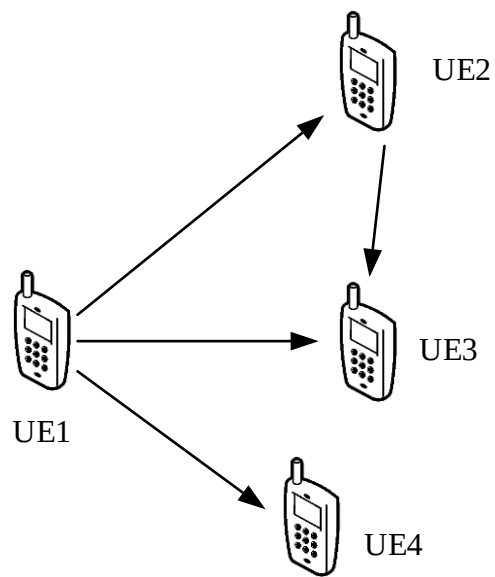


FIG. 2

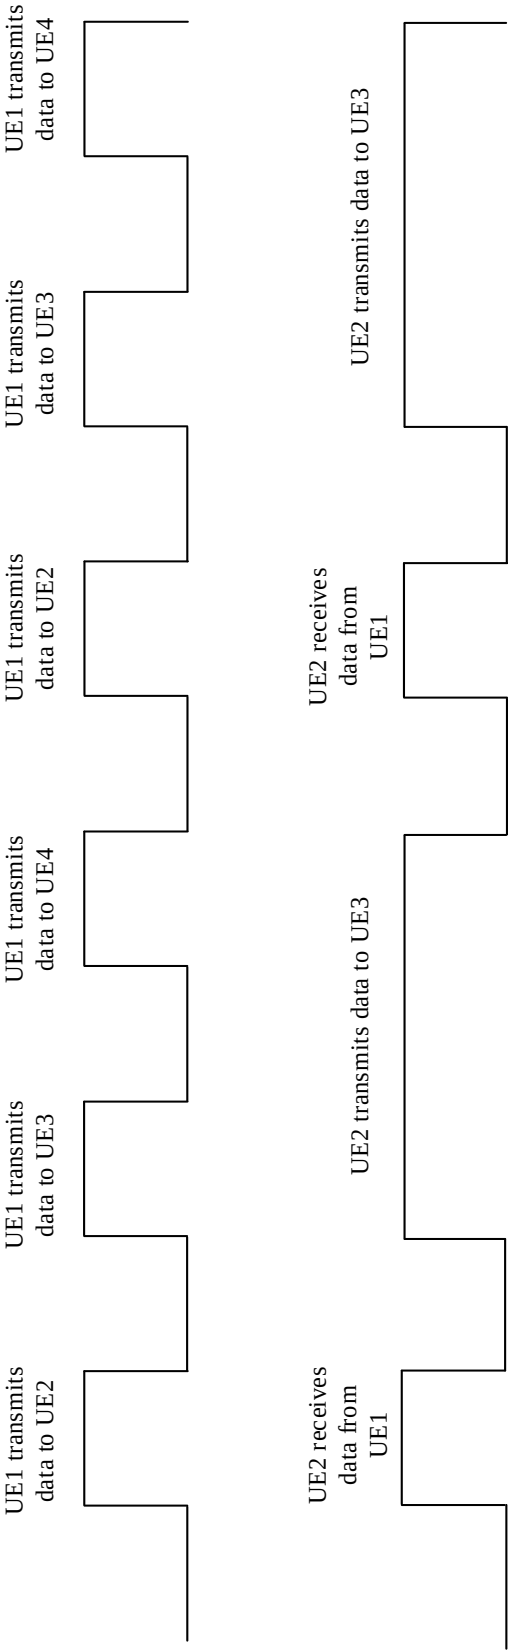


FIG. 3

FIG. 3

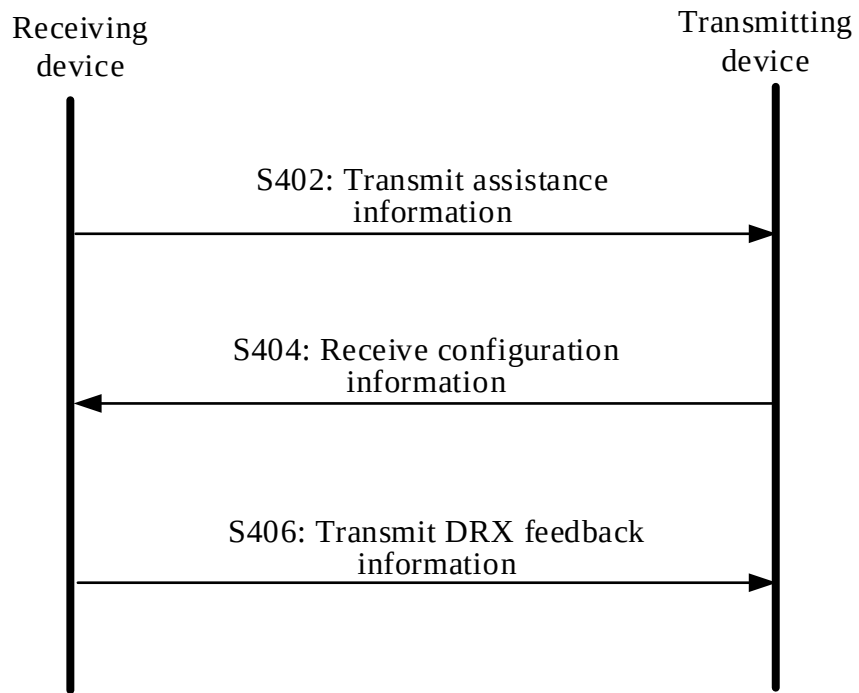


FIG. 4

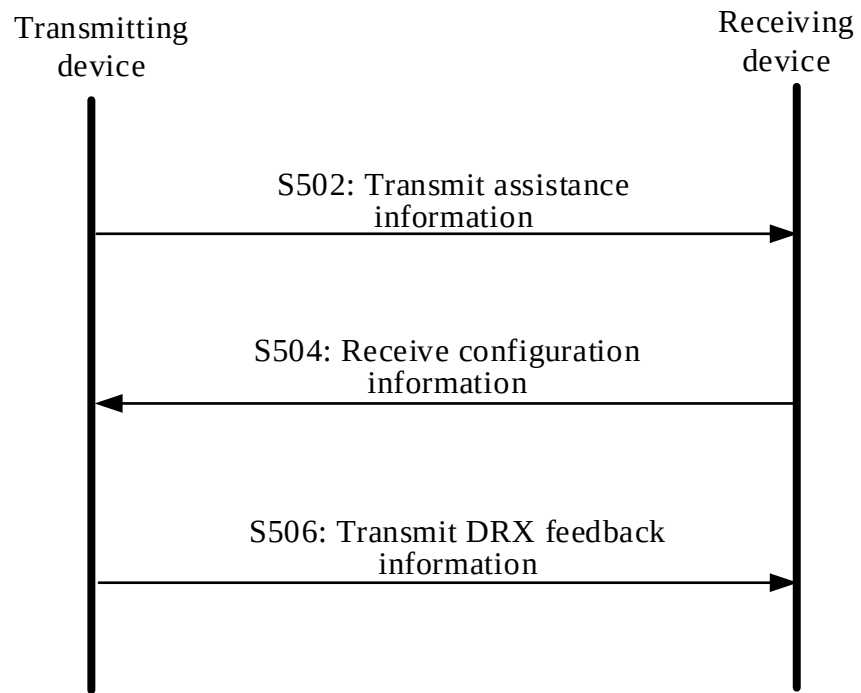


FIG. 5

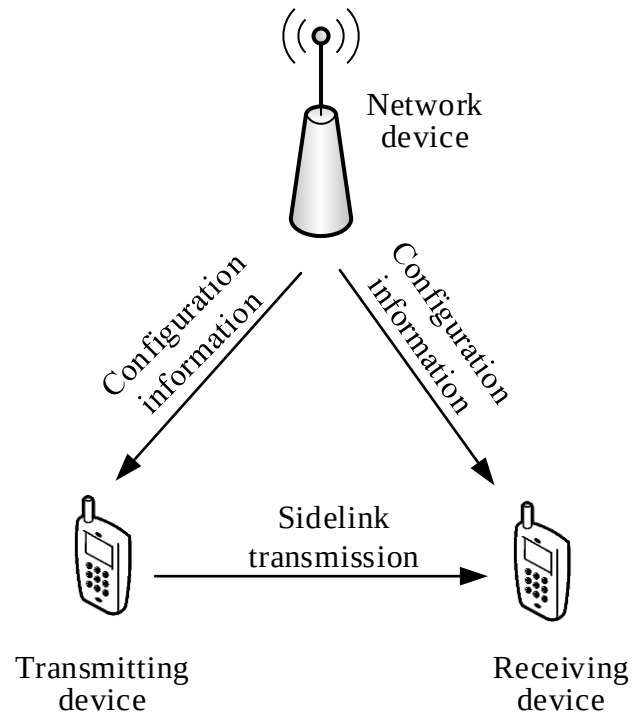


FIG. 6

700

Transmit DRX configuration information to a terminal device, where the configuration information is used for the terminal device to perform DRX configuration

~ S702

FIG. 7

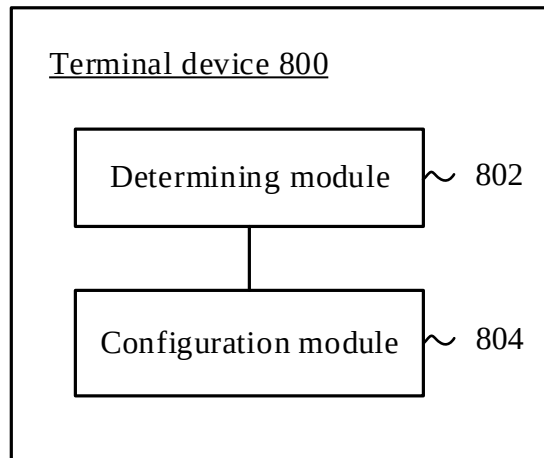


FIG. 8

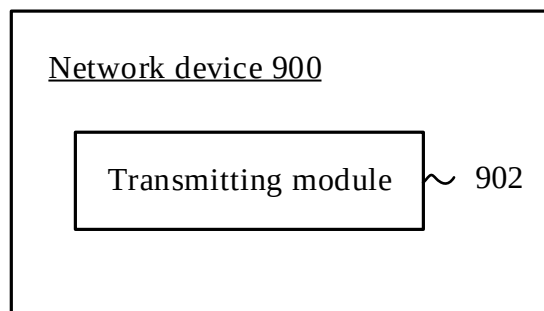


FIG. 9

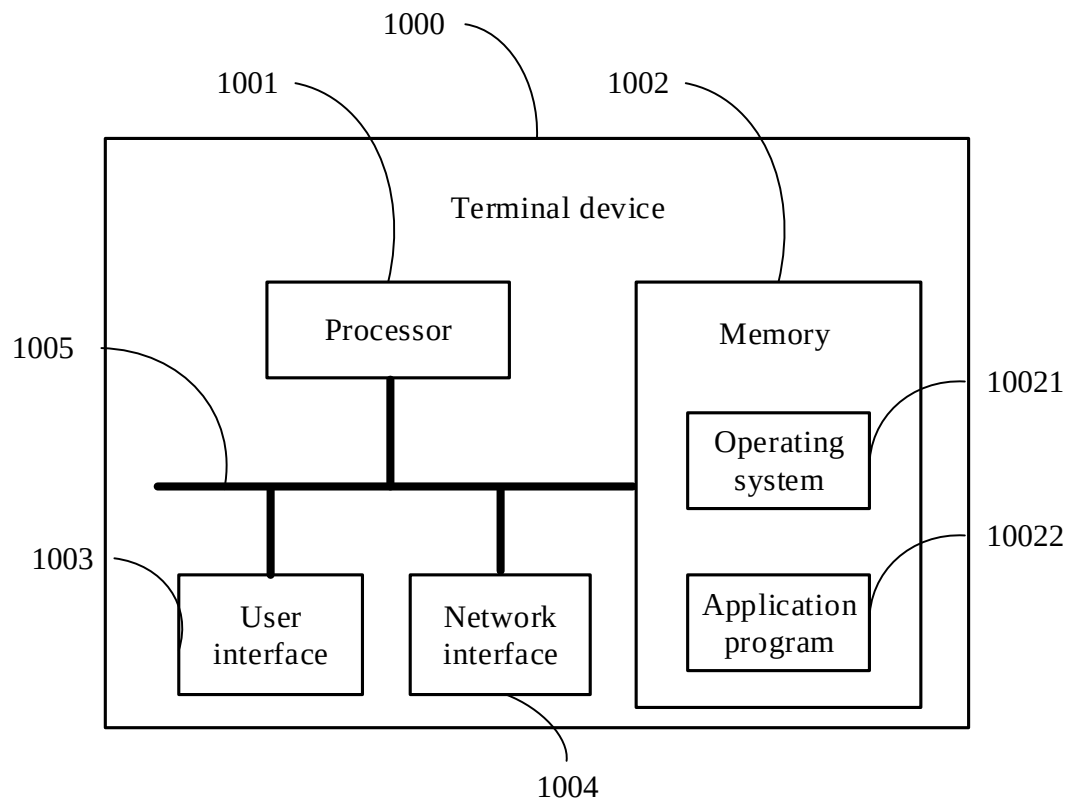


FIG. 10

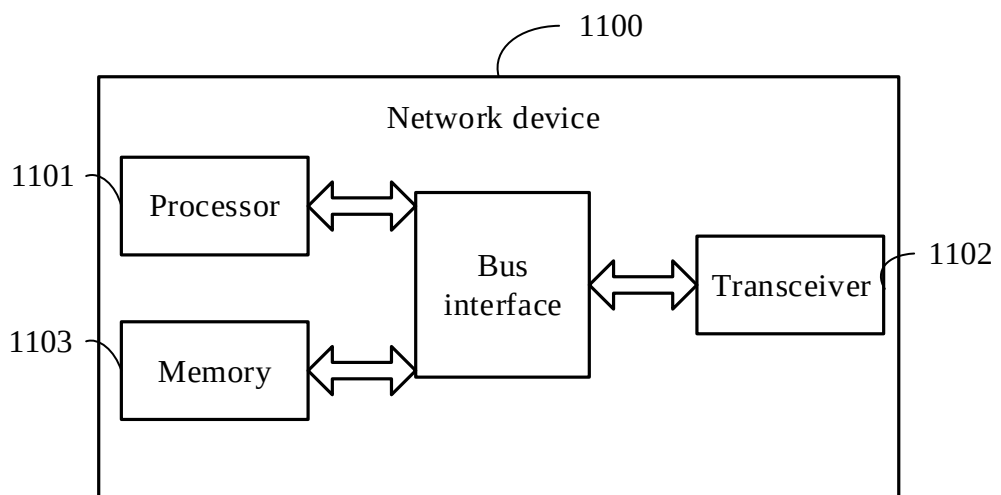


FIG. 11