



(51) International Patent Classification:
G08C 23/00 (2006.01) *H04B 10/24* (2006.01)
G08B 5/00 (2006.01)

(21) International Application Number:
PCT/MY2009/000215

(22) International Filing Date:
24 December 2009 (24.12.2009)

(25) Filing Language: English

(26) Publication Language: English

(72) Inventor; and

(71) Applicant : **TAI, Jiun Pink** [MY/MY]; No 15 Jalan Songkit 2, Taman Sentosa 80150, Johor Baru, Johor (MY).

(74) Agent: **SEOW & ASSOCIATES**; No 19 Jalan Songkit 5, Taman Sentosa 80150, Johor Baru, Johor (MY).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: A REMOTE CONTROL UNIT FOR CONTROLLING A PLURALITY OF DEVICES AND CORRESPONDING METHODS OF USING THE REMOTE CONTROL UNIT

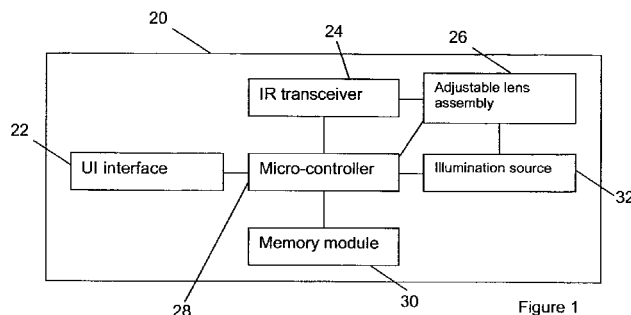


Figure 1

(57) Abstract: There are provided a remote control unit configurable to be used to control a plurality of devices together with corresponding methods to use the remote control. Advantageously, the transmission of both master IR signals and an illumination beam from the remote control unit is adjustable for varying a field of coverage of the master IR signals, with at least one of the plurality of devices within the field of coverage receiving the master IR signals allowing the at least one of the plurality of devices to be controlled.

