

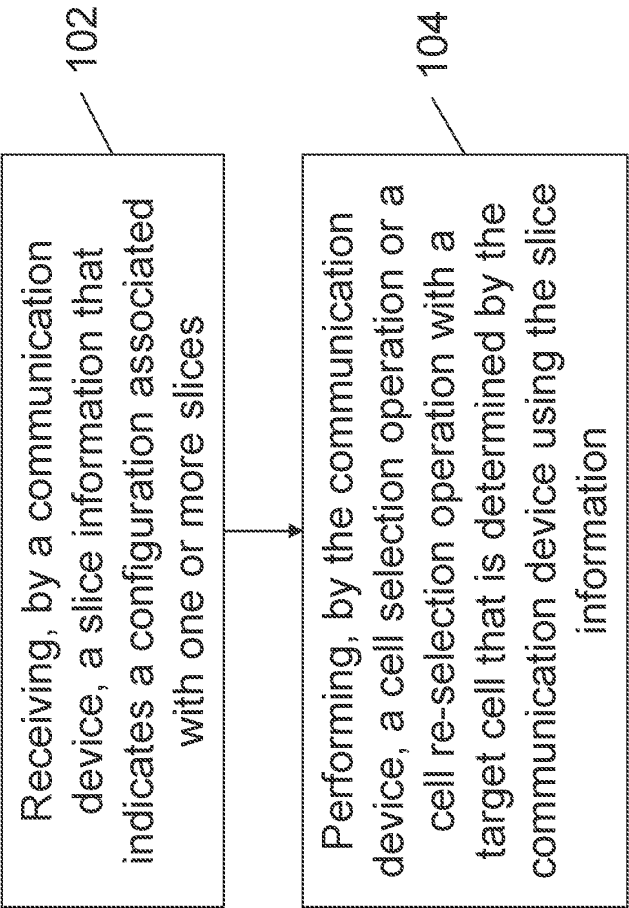


FIG. 1

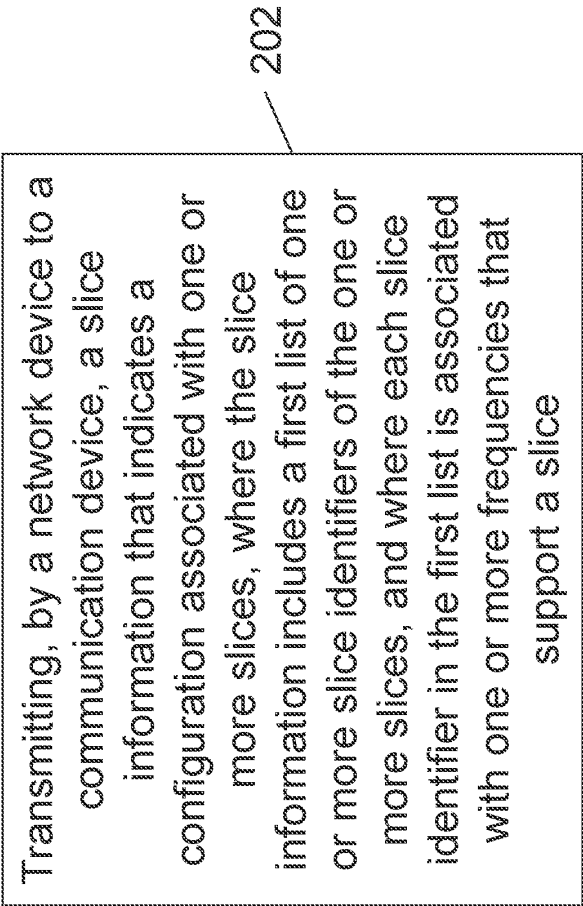


FIG. 2A

Transmitting, by a network device to a communication device, a slice information that indicates a configuration associated with one or more slices, where the slice information includes a second list of one or more slice group identifiers, where each slice group identifier in the second list is associated with one or more frequencies that support a slice group, and where each slice group indicated by the second list is associated with at least one slice

212

FIG. 2B

Transmitting, by a network device to a communication device, a slice information that indicates a configuration associated with one or more slices, where the slice information includes a third list of one or more access category identifiers associated with the one or more slices, and where each access category identifier in the third list is associated with one or more frequencies that support an access category

222

FIG. 2C

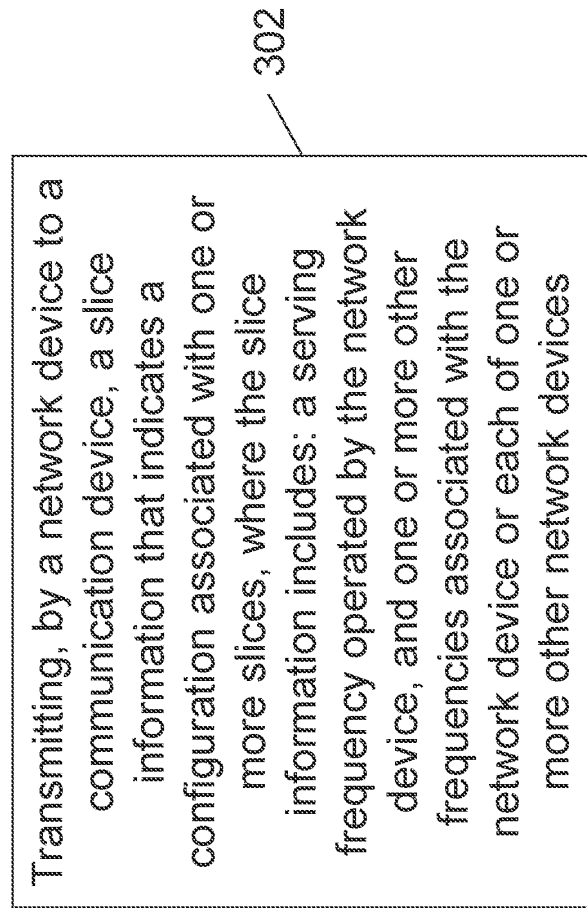


FIG. 3

400

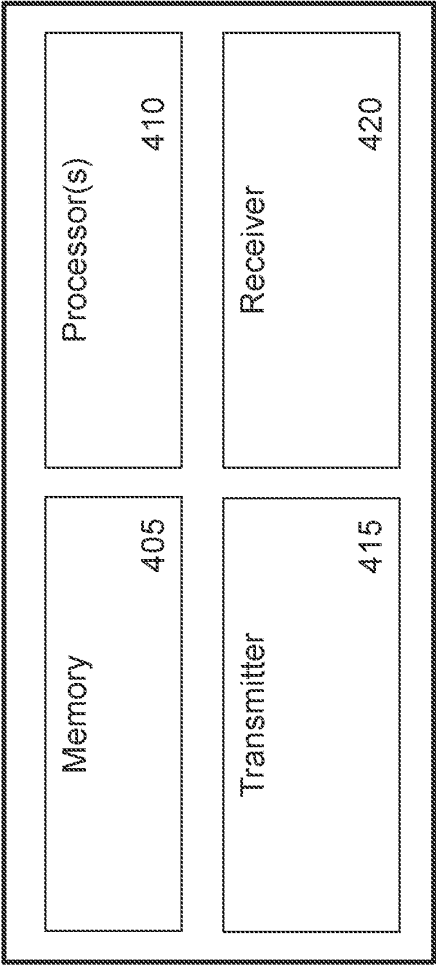


FIG. 4

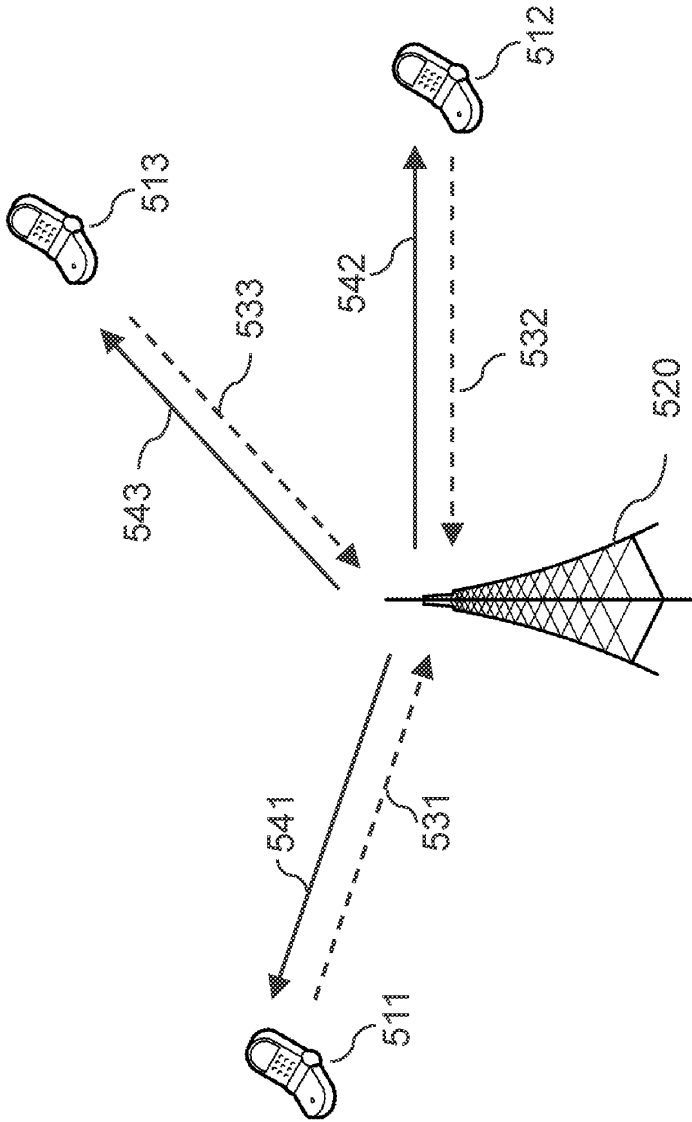


FIG. 5