



(51) International Patent Classification:

H04W 52/02 (2009.01) H04W 88/06 (2009.01)
H04W 84/12 (2009.01) H04W 88/10 (2009.01)

(21) International Application Number:

PCT/EP2021/061618

(22) International Filing Date:

04 May 2021 (04.05.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building Bantian Long-
gang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventor; and

(71) Applicant (for US only): **KLEIN, Arik** [IL/DE]; c/o
Huawei Technologies Duesseldorf GmbH, Riesstr. 25,
80992 Munich (DE).

(72) Inventors: **SHILO, Shimon**; Huawei Technologies Dues-
seldorf GmbH, Riesstr. 25, 80992 Munich (DE). **WEITZ-
MAN, Avi**; Huawei Technologies Duesseldorf GmbH,
Riesstr. 25, 80992 Munich (DE). **EPSTEIN, Avner**;
Huawei Technologies Duesseldorf GmbH, Riesstr. 25,
80992 Munich (DE).

(74) Agent: **KREUZ, Georg**; Huawei Technologies Duessel-
dorf GmbH, Riesstr. 25, 80992 Munich (DE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,

(54) Title: DEVICES AND METHODS FOR ENERGY EFFICIENT MULTI-LINK COMMUNICATION IN A WIRELESS NET-
WORK

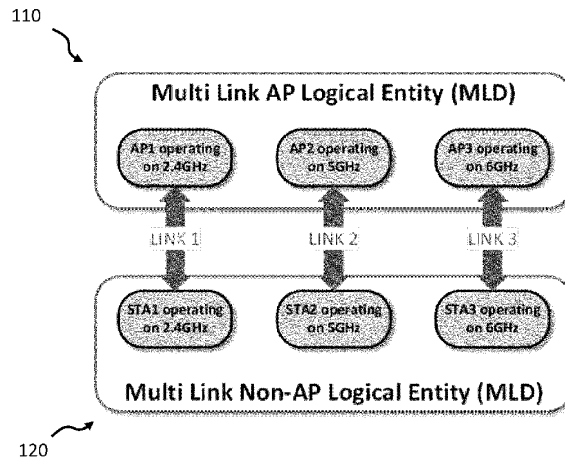


Fig. 2

(57) Abstract: A multi-link wireless AP (110) is configured to exchange a plurality of frames via a plurality of setup links with a plurality of multi-link wireless non-AP stations (120) in a wireless communication network (100). The multi-link wireless AP (110) comprises a communication interface (113) configured to send a management frame to at least one of the plurality of multi-link wireless non-AP stations (120) operating on a first setup link, wherein the management frame comprises information for the at least one of the plurality of multi-link wireless non-AP stations (120) for identifying at least the first setup link of the plurality of setup links to be disabled. The multi-link wireless AP (110) further comprises a processing circuitry (111) configured to, in response to sending the management frame, disable at least the first setup link for reducing a power required to operate at least the first setup link.

[Continued on next page]

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))