



(51) International Patent Classification:

F04B 7/00 (2006.01) *F04B* 49/06 (2006.01)
F04B 39/08 (2006.01) *F04B* 53/10 (2006.01)
F04B 39/10 (2006.01)

(21) International Application Number:

PCT/BR2014/000027

(22) International Filing Date:

31 January 2014 (31.01.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

BR1020130035629

15 February 2013 (15.02.2013)

BR

(71) Applicant: **WHIRLPOOL S.A.** [BR/BR]; Avenida das Nações Unidas, nº 12.995, 32º andar, Brooklin Novo, CEP-04578-000 São Paulo, SP (BR).

(72) Inventors: **LILIE, Dietmar Erich Bernhard**; Rua Orestes Guimarães, 904, CEP-89204-060 Joinville, SC (BR). **ANDRICH, Roberto**; Rua Vereador Guilherme Zuege, 802, Pirabeiraba, CEP-89213-300 Joinville, SC (BR).

(74) Agent: **RODRIGUES, Carina, S.**; Daniel Advogados, Rua Joaquim Floriano, 413, 13º andar, Itaim Bibi, CEP-04534-011 São Paulo, SP (BR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD FOR ACTUATING VALVE AND SYSTEM FOR ACTUATING VALVE FOR MULTI-SUCTION ALTERNATIVE COMPRESSOR

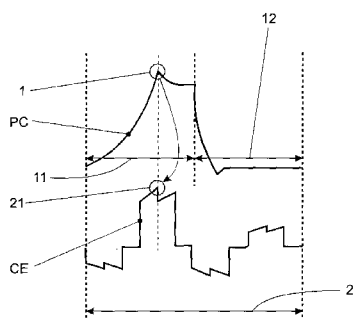


FIG. 1A

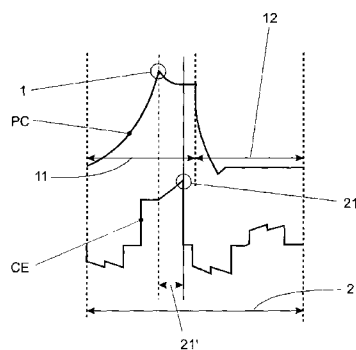


FIG. 1B

(57) Abstract: The present invention refers to a method for actuating semi-controlled valve that acts in synchronism with the compression cycles of an alternative compressor and to a system for actuating a multi-suction alternative compressor semi-controlled valve. Said method comprises at least a step of detecting at least one compression peak (1) in the course of at least one mechanical cycle (2) of the alternative compressor; and at least a step of switching the functional status of at least an alternative compressor semi-controlled valve (3) based on detecting at least one compression peak (1) in the course of at least one mechanical cycle (2) of the alternative compressor (5).



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*