

(43) International Publication Date
29 January 2015 (29.01.2015)

- (51) **International Patent Classification:**
G01C 11/08 (2006.01) *G06T 3/60* (2006.01)
- (21) **International Application Number:**
PCT/IL2014/050570
- (22) **International Filing Date:**
25 June 2014 (25.06.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
227627 24 July 2013 (24.07.2013) IL
- (71) **Applicant: ISRAEL AEROSPACE INDUSTRIES LTD.**
[IL/IL]; Ben-Gurion International Airport, 7010000 Lod (IL).
- (72) **Inventors: ZALMANSON, Garry Haim;** 59 Baruch Spinoza Street, 4358850 Raanana (IL). **BAR HILLEL, Gil;** 17 Kehilat Odessa street, 6951117 Tel Aviv (IL).
- (74) **Agent: HAUSMAN, Ehud;** REINHOLD COHN AND PARTNERS, PO Box 13239, 6113102 Tel Aviv (IL).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

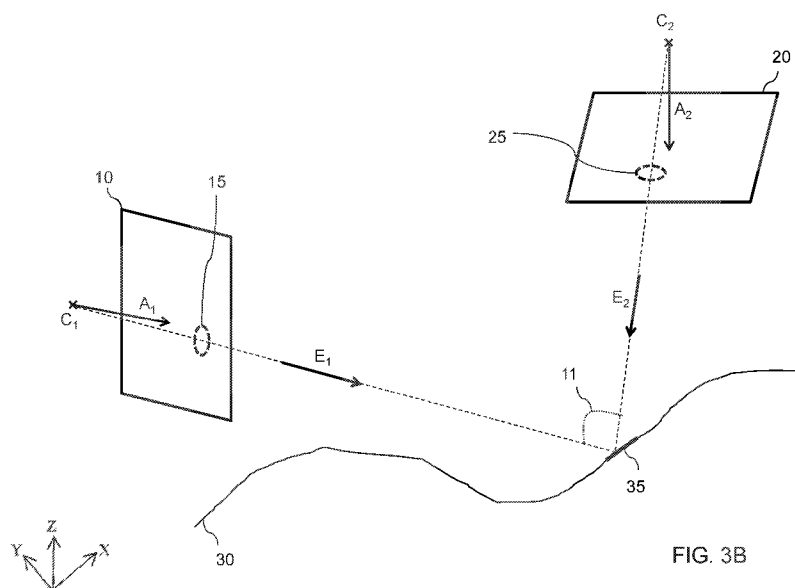
Declarations under Rule 4.17:— *of inventorship (Rule 4.17(iv))***Published:**— *with international search report (Art. 21(3))*(54) **Title:** GEOREFERENCING METHOD AND SYSTEM

FIG. 3B

(57) **Abstract:** The present disclosure provides a method of georeferencing a first image of a scene acquired from a first imaging device based on at least one second image of the scene acquired from a second imaging device. The method comprises obtaining data indicative of an eligibility parameter for one or more areas of the scene; selecting one or more pivot areas among the one or more areas of the scene, wherein the eligibility parameter of the pivot areas satisfy a predefined criterion; for at least some of the selected pivot areas, identifying tie points for the first and second images; and solving the external orientation of the first image using the identified tie points and a first imaging device model.