(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 April 2008 (10.04.2008)

PCT

(10) International Publication Number
WO 2008/042142 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2007/020596

(22) International Filing Date:
24 September 2007 (24.09.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/537,510 29 September 2006 (29.09.2006) US

(71) Applicant *(for all designated States except US)*: **ADVANCED MICRO DEVICES, INC.** [US/US]; One AMD Place, Mail Stop 68, P.O. Box 3453, Sunnyvale, CA 94088-3453 (US).

(72) Inventor; and

(75) Inventor/Applicant *(for US only)*: **COLE, Terry, L.** [US/US]; 5915 Highland Hills Drive, Austin, TX 78731 (US).


(74) Agent: **DRAKE, Paul, S.**; Advanced Micro Devices, Inc., 5204 East Ben White Boulevard, Mail Stop 562, Austin, TX 78741 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: CONNECTION MANAGER WITH DEFERRED CONFIGURATION

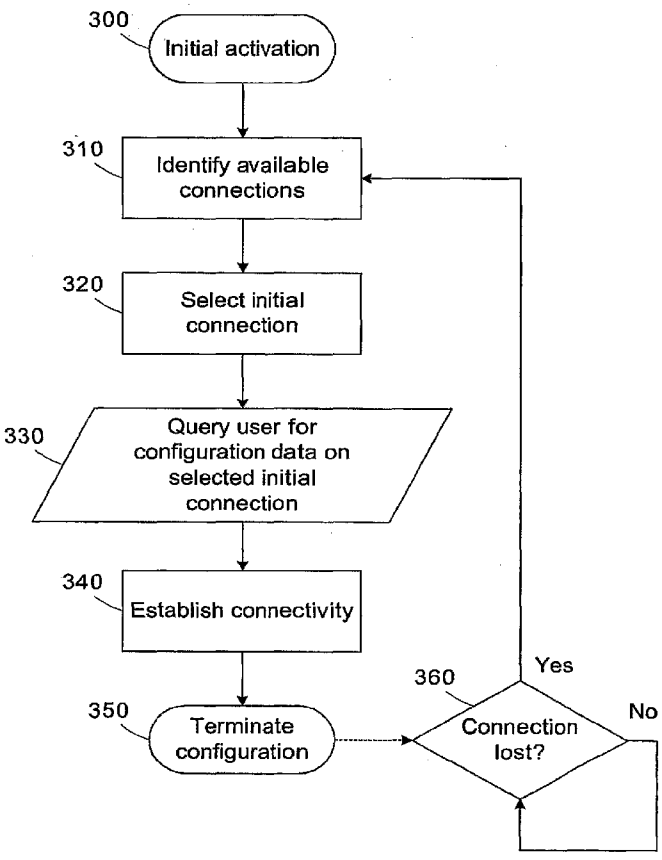

(57) Abstract: A method for configuring a mobile device (1 10) including a plurality of communication interfaces (225) is provided. A first one of the communication interfaces (225) is selected for establishing an initial connection to a first remote network (120). A user of the mobile device (1 10) is queried for configuration information related to the selected first communication interface (225). The mobile device (110) is connected to the first remote network (120) through the first communication interface (225). A loss of connectivity associated with the first communication interface (225) is identified. A second one of the communication interfaces (225) is selected for establishing a second connection to a second remote network (120). The user of the mobile device (110) is queried for configuration information related to the selected second communication interface (225). The mobile device (1 10) is connected to the second remote network (120) through the second communication interface (225).

WO 2008/042142 A2

ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*