

100

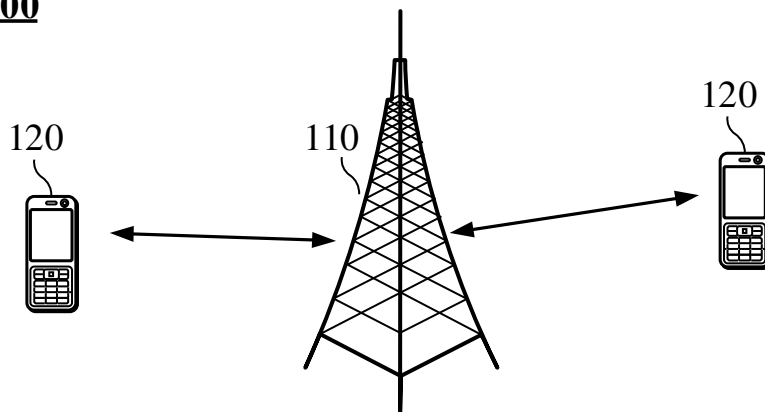


FIG. 1

200

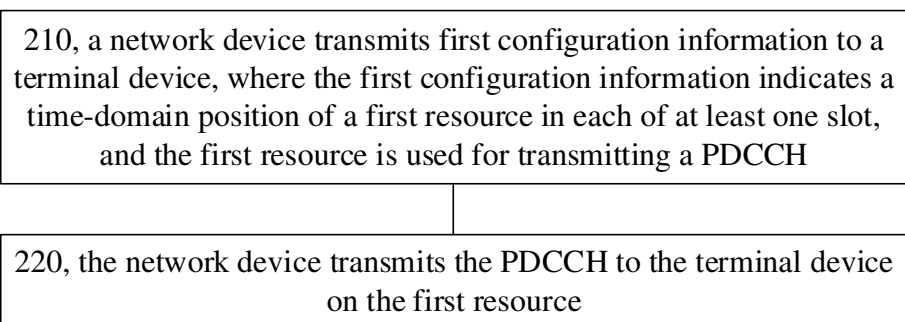


FIG. 2

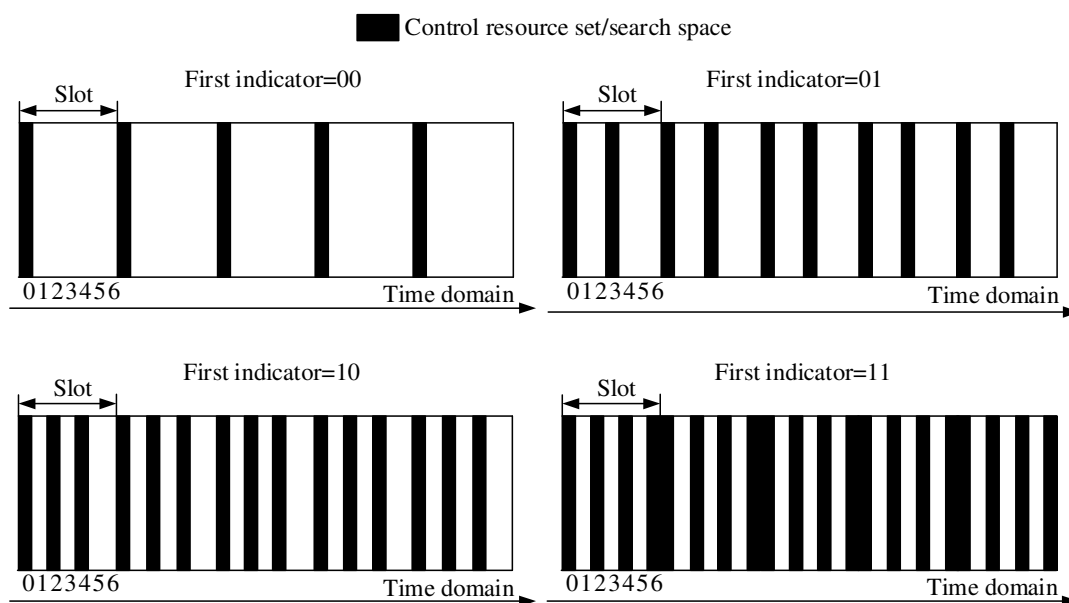


FIG. 3

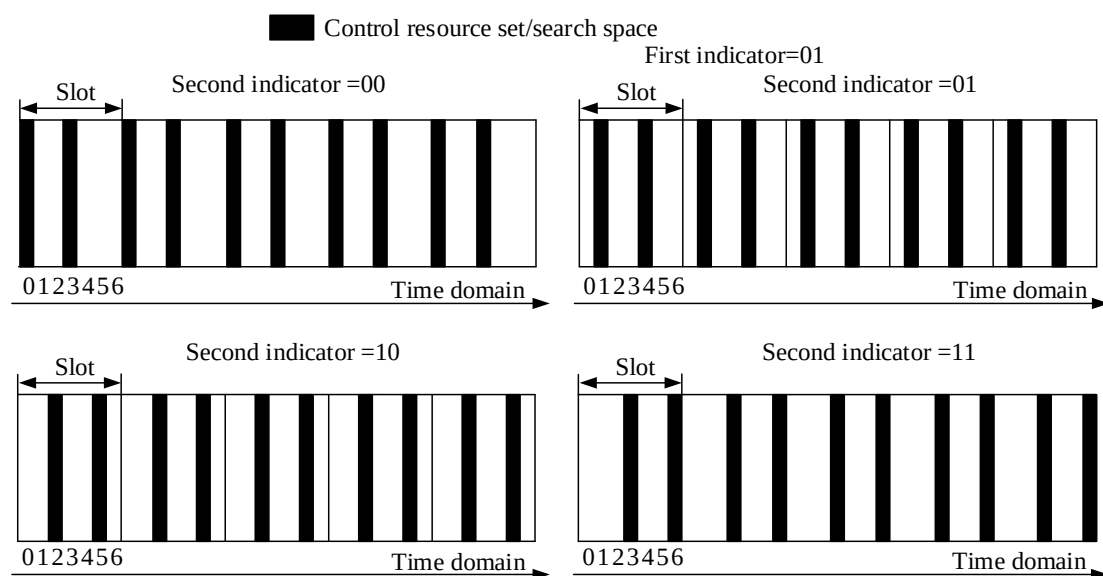


FIG. 4

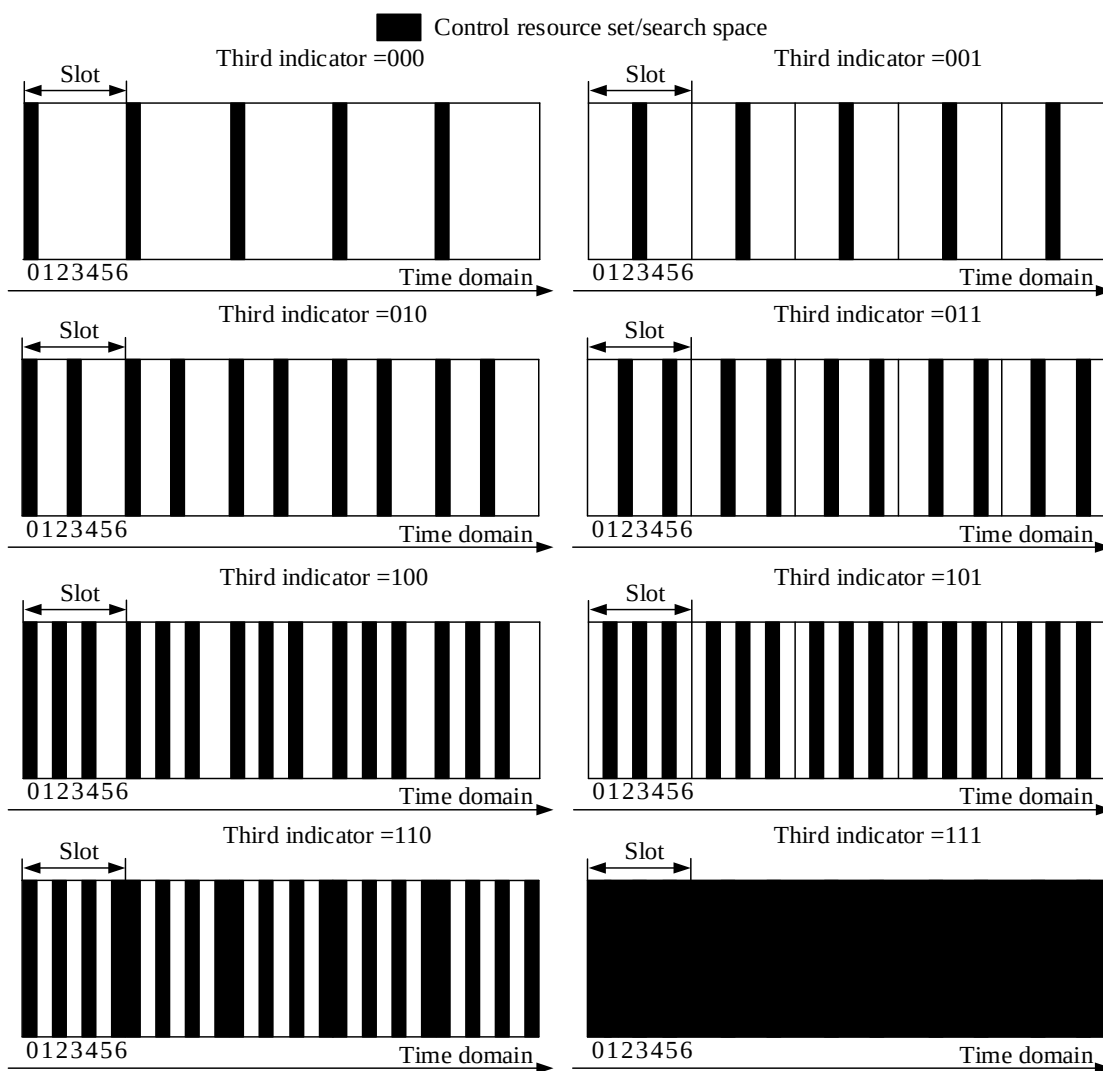


FIG. 5

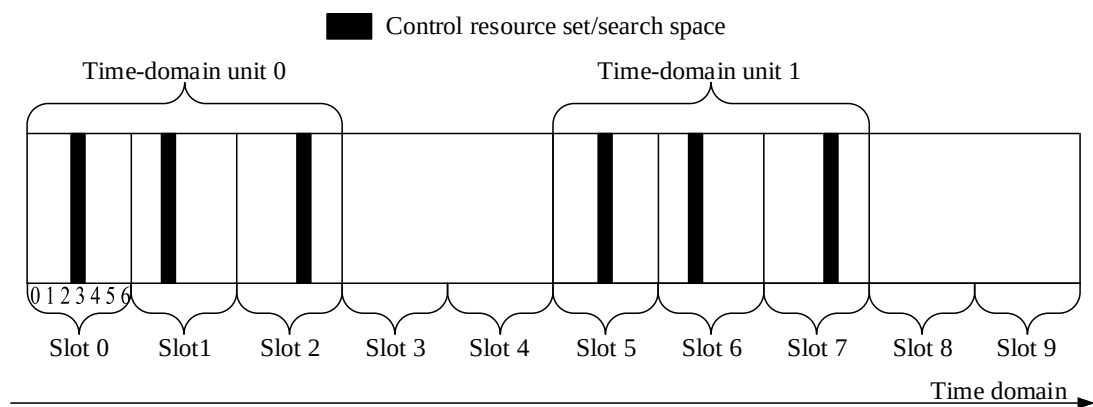


FIG. 6

300

310: A terminal device receives first configuration information from a network device, where the first configuration information indicates a time-domain position of a first resource in each of at least one slot, and the first resource is used for transmitting a PDCCH

320: The terminal device monitors the PDCCH transmitted by the network device on the first resource

FIG. 7

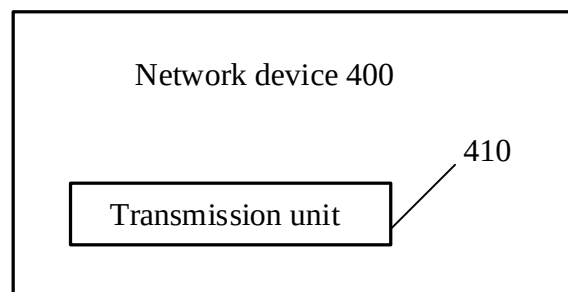


FIG. 8

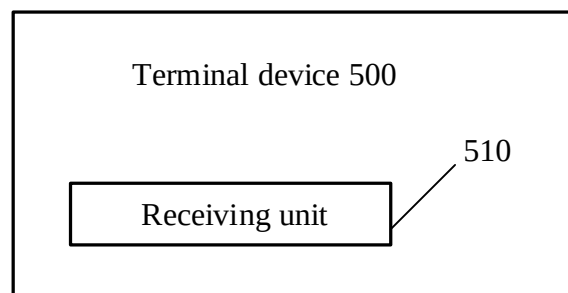


FIG. 9

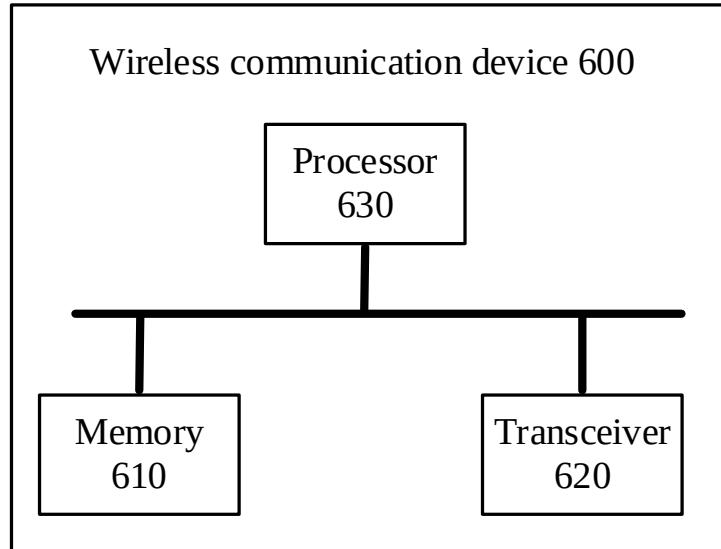


FIG. 10

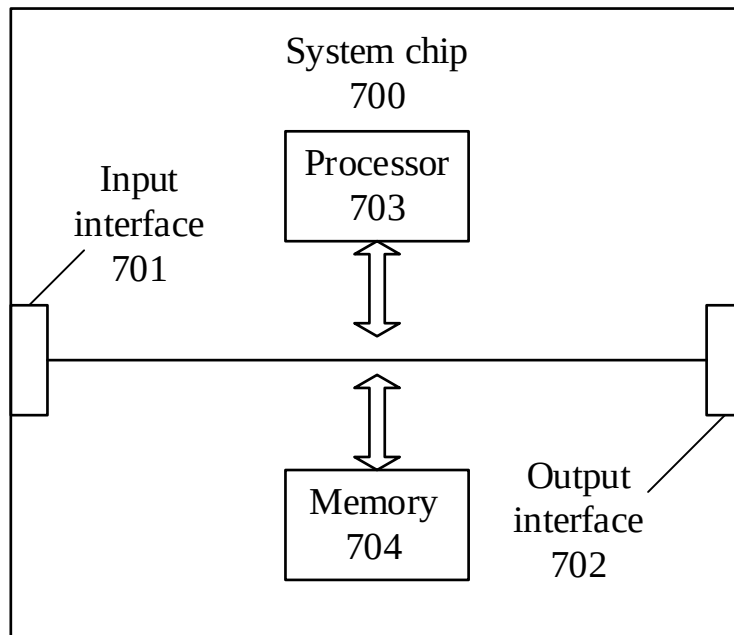


FIG. 11