



- (51) International Patent Classification:
B65D 88/36 (2006.01) *B65D 90/42* (2006.01)
E04H 4/08 (2006.01)
- (21) International Application Number:
PCT/HU2014/000039
- (22) International Filing Date:
6 May 2014 (06.05.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13462002.0 9 May 2013 (09.05.2013) EP
- (72) Inventors; and
- (71) Applicants : **MOHAMMADI, Pedram** [IR/HU]; Bellus
József u. 10/B, H-2143 Kistarcsa (HU). **HERMANN,
László** [HU/HU]; Szakiskola u. 27., H-1224 Budapest
(HU).
- (74) Agent: **DANUBIA PATENT & LAW OFFICE LLC**;
POB 198, H-1368 Budapest (HU).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) Title: COVER DEVICE AND BLANKET FOR COVERING LIQUID SURFACES

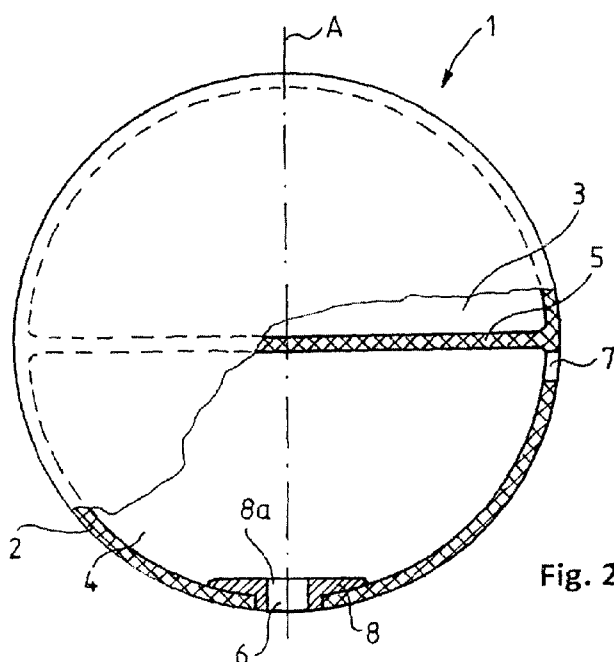


Fig. 2

- (57) Abstract: A self filling cover device for covering a sur-
face of a liquid, having a shell (2) defining inner cavity, and
the inner cavity is to be filled at least partly with liquid, so
that the inner cavity is divided in at least two chambers (3,4)
by a separating means (5,51,52), and one of the chambers (4)
is provided by at least one opening (6) formed in the shell
(2).