

REPLACED SHEETS SG

☒ Description : paged 1 to paged 9
☒ Claim(s) : paged 10 to paged 12
☒ Drawing(s) : paged 13 to paged 14
☒ Abstract : paged 1-7 to paged 7-1

IP01 COPY
 9700323-0

APPARATUS FOR SUPPLYING PASTE FOOD SHEETS AT A PREDETERMINED INTERVAL

BACKGROUND OF THE INVENTION

This invention relates to an apparatus for
 5 supplying paste food sheets at a predetermined interval,
 in particular, to an apparatus for forming paste food
 material into a continuous sheet, severing the sheet into
 a plurality of segments and supplying the sheet segments
 or sheets at a predetermined interval.

10 Japanese Published Patent Application No. 6-14832
 discloses an apparatus for supplying food paste sheets at
 a predetermined interval, including a nozzle for shaping
 paste food into an elongated or continuous sheet, a first
 horizontal roller adapted to be rotated to receive the
 15 continuous sheet of food paste, cutter means for cutting
 the sheet received on the circumferential surface of the
 first roller at a predetermined interval, first peeler
 means for peeling off the cut sheet segments from the
 first roller, a second horizontal roller provided under the
 20 first roller and adapted to be rotated at a speed greater
 than that of the first roller to receive the sheet segments
 peeled from the first roller on the circumferential surface
 thereof in such a manner that the sheet segments are spaced
 from each other and second peeler means for peeling off
 25 the sheet segments from the second roller to supply them
 at a predetermined interval.

However, the apparatus stated above gives rise
 to a problem in that the sheet segments supplied on the

This Sheet Has Been Replaced



REPLACED SHEETS SG	
☐	Description : paged to paged
☐	Claim(s) : paged to paged
☐	Drawing(s) : paged to paged
☐	Abstract : paged to paged

circumferential surface of the second roller are prone to be displaced from their regular position, and thus it is difficult to supply them from the second roller at an accurate interval.

5 SUMMARY OF THE INVENTION

Accordingly, it is an object of this invention to provide an apparatus which enables such sheets or sheet segments to be delivered at a predetermined interval accurately.

10 This invention provides an apparatus for supplying food paste material sheets of a predetermined length at a predetermined interval on a surface moving at a predetermined speed. The apparatus includes a first roller having an axis which is substantially horizontally set and
15 adapted to be rotated to receive a continuous food paste material sheet on the circumferential surface thereof; means for severing the continuous food paste material sheet on the circumferential surface at a predetermined interval into a plurality of sheet segments; a first peeler means
20 provided at a predetermined position on the lower half portion of the circumferential surface of the first roller for peeling off the severed sheet segments gradually from the leading edges of the same from the circumferential surface which segments have been successively brought to
25 the predetermined position; and a second roller provided under the first roller and having a horizontal axis. The second roller is adapted to be rotated to sequentially receive the sheet segments successively peeled off from the



circumferential surface of the first roller. The apparatus further includes a second peeler means for successively peeling off the sheet segments from the second roller to supply them onto the above-noted moving surface. The

5 second roller includes means provided on the circumferential surface thereof for receiving a leading portion of each of the sheet segments which has moved vertically down from the circumferential surface of the first roller so as to position and hold the leading portion

10 on the circumferential surface of the second roller in the circumferential direction. The second roller further includes surface means on the circumferential surface of the second roller for receiving a portion of each of the sheet segments following the leading portion of the same.

15 The rotational speeds of the positioning and holding means and the surface means about the axis of the second roller are substantially equal to the predetermined speed of the above-noted moving surface and greater than the circumferential speed of the first roller so that the

20 sheet segments received on the circumferential surface of the second roller are separated from each other at the predetermined interval at which the sheet segments or the sheets of the predetermined length as noted above are supplied onto the moving surface.

25 In a preferred embodiment, the second roller includes sheet segment holding means provided on the circumferential surface thereof. The holding means has a radially outer surface adapted to receive and hold said



sheet segment including a leading portion which inclines radially inwardly as it approaches the leading edge thereof so that the inclined leading portion functions as the above-noted positioning and holding means and the remaining
5 portion of the outer surface succeeding the inclined leading portion functions as the above-noted surface means. The apparatus further includes an auxiliary roller having a horizontal axis and adapted to be rotatably engaged with the outer surface of the sheet segment received on the
10 second roller to press the sheet segment against the second roller, whereby the segment is prevented from accidentally peeling off from the second roller. The auxiliary roller is arranged near the first peeler means and upstream of the same in the direction of rotation of the first roller and
15 adapted to be moved from the position as arranged above by engagement thereof with the outer surface of the sheet segment on the second roller in rotation and to return to the above-noted arranged position after the auxiliary roller disengages from the outer surface of the sheet
20 segment.

The foregoing and other objects of this invention will become clear from the following detailed description of preferred embodiments when taken in conjunction with the accompanying drawings.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic side elevation view of a multiply food production apparatus in which a food paste sheet supply apparatus in accordance with a first



embodiment of this invention is incorporated;

Fig. 2 is a perspective partial view of the apparatus of Fig. 1 to mainly show the food paste sheet supply apparatus;

5 Figs. 3 - 7 are side elevation views of the food paste sheet supply apparatus of Fig. 2 showing an operation thereof;

Figs. 8 - 11 are side elevation views of a food paste sheet supply apparatus in accordance with a second
10 embodiment of this invention showing an operation thereof.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 shows an apparatus 10 for producing multiply food F including three piled sheets. The apparatus includes an endless belt conveyor 12, a first nozzle 14
15 for forming a first continuous fish paste sheet S1 and supplying it onto the conveyor, an apparatus 16 for supplying rectangular cheese sheets C1 onto the first continuous fish paste sheet C1 at a predetermined interval, a second nozzle 18 for forming a second continuous fish
20 paste sheet S2 onto the first continuous fish paste sheet S2 with the rectangular cheese sheets C1, a cutter 20 for cutting the thus-formed continuous paste food material M into a plurality of segments or above-stated multiply food F which each includes one of the rectangular cheese sheets
25 and a hot water tank T adapted to receive the food segments F from the conveyor and subject them to heating process to produce final food products.

This Sheet Has Been Replaced



As shown in Figs. 1 and 2, the apparatus 16 includes a nozzle 24 for forming and supplying a continuous cheese sheet C2, a first roller 26 having a horizontal axis and adapted to be rotated to receive the continuous cheese sheet C2, a cutter 28 having a horizontal cutting edge and adapted to cut the continuous cheese sheet C2 at a pre-determined interval in the longitudinal direction of the sheet or in the circumferential direction of the first roller to thereby form a plurality of rectangular cheese sheets C1, a first peeler or horizontal piano wire 30 (Fig. 3) engaged with the circumferential surface of the roller 16 for peeling off the rectangular cheese sheets C1 gradually from the leading edge thereof from the first roller and a second roller 32 horizontally provided under the first roller. The second roller 32 is provided with a rectangular cheese sheet holding member 34 on the circumferential surface thereof which is adapted to receive one of the rectangular cheese sheets C1 on the radially outer surface thereof. The apparatus further includes an auxiliary roller 36 adapted to be rotatably engaged with the outer surface of the cheese paste sheet C1 on the cheese sheet holding member 34 to press the rectangular cheese sheet against the radially outer surface of the cheese sheet holding member 34 and a second peeler or horizontal piano wire 40 (Fig. 3) adapted to peel off the cheese segment from the radially outer surface of the cheese sheet holding member 34.

This Sheet Has Been Replaced



As shown in Figs. 3 - 7, the radially outer surface of the cheese sheet holding member 34 includes an inclined leading portion 44 which is inclined radially inwardly as it approaches the leading edge thereof and functions as
5 a means for receiving and holding the leading portion of the rectangular cheese sheet C1 (Fig. 4) and an arch surface portion 46 succeeding the leading portion 44 having a radius centering the axis of the second roller 32 and adapted to receive the remaining portion of the rectangular
10 cheese sheet succeeding the leading edge portion of the same held by the inclined leading portion of the radially outer surface of the holding member 34 (Fig. 5).

The auxiliary roller 36 is provided on the top end of an arm 48 which is pivotably mounted on an apparatus
15 frame (not shown) at the point under the second roller 32 and arranged to be usually set at the position shown in Fig. 3. In this position, the circumferential surface of the auxiliary roller 36 is near to but spaced from the circumferential surface of the first roller 26 to allow
20 the rectangular cheese sheets C1 on the latter surface to pass between these surfaces toward the first peeler or horizontal piano wire 30 and is positioned where the inclined leading portion 44 of the radially outer surface of the cheese sheet holding member 34 passes. The arm 48
25 is biased by a spring 50 in a counterclockwise direction and stopped by a stopper (not shown) such that the auxiliary roller 36 is positioned at the above-stated usual position.



As shown in Fig. 3, the rectangular cheese sheet C1 which has reached the first peeler 30 is peeled off by the peeler from the circumferential surface of the first roller 26 and moves vertically down toward the second roller 32.

5 The second roller is rotated at a speed greater than that of the first roller such that each revolution of the second roller enables the second roller to receive a single rectangular cheese sheet C1 from the first roller 26 and to transfer it onto the first continuous fish paste sheet

10 S1. The leading portion of the rectangular cheese sheet C1 moving down from the first roller 26 is engaged and held by the inclined leading portion 44 of the radially outer surface of the rectangular cheese sheet holding means 34 (Fig. 4) and the remaining portion of the rectangular

15 cheese sheet C1 succeeding the leading portion of the sheet is received by the portion 46 of the radially outer surface succeeding the inclined leading portion 44 of the same. The auxiliary roller 36 rotatably engages with the rectangular cheese sheet held on the holding member 34 to

20 press the sheet against the radially outer surface of the holding member 34 to thereby prevent the cheese sheet from accidentally peeling off from the surface. Due to the positional difference between the center of rotation of the holding member and the pivotal pin of the arm 48, the

25 auxiliary roller 36 is pivoted in a clockwise direction by the engagement with the radially outer surface of the holding member 34 or the rectangular cheese sheet thereon against the bias force of the spring 50 and, upon



disengagement of the auxiliary roller 36 from the radially outer surface of the holding member, the roller is returned to its usual position by the spring 50 as shown in Fig. 6. The second peeler or horizontal piano wire 40 is positioned under the second roller near the endless conveyor 12 where the outer surface of the rectangular cheese sheet holding member 34 passes so that the rectangular cheese sheet C1 held on the outer surface of the holding member 34 and brought to the wire is peeled off gradually from the leading edge thereof from the outer surface of the holding member by the wire and received by the first continuous fish paste sheet S1 conveyed by the endless conveyor which is driven at the same speed as the speed of the rectangular cheese sheet held on the holding member 34 (Figs. 6 and 7).

Accordingly, the rectangular cheese sheets or sheet segments supplied on the continuous fish paste sheet are spaced from each other at regular intervals.

Figs. 8 - 11 show a food paste sheet supply apparatus 52 in accordance with the second embodiment of this invention. As shown, the apparatus of this embodiment is substantially the same as that of the first embodiment except that the former apparatus does not include the auxiliary roller 36 as provided in the latter apparatus. The apparatus of this embodiment is suitable for use when the cheese paste used to form cheese paste sheets or sheet segments as stated above has viscosity enough to attach to the surface of the cheese sheet holding member 34 by itself.





WHAT IS CLAIMED IS:

1. An apparatus for supplying food paste material sheets of a predetermined length at a predetermined interval on a surface moving at a predetermined speed, said apparatus including:

a first roller having an axis which is substantially horizontally set and adapted to be rotated to receive a continuous or elongated food paste material sheet on the circumferential surface thereof;

a means for severing said continuous food paste material sheet on said circumferential surface at a predetermined interval in the circumferential direction into a plurality of sheet segments or said sheets of said predetermined length;

a first peeler means provided at a predetermined position on the lower half portion of said circumferential surface of said first roller for peeling off said severed sheet segments gradually from the leading edges of the same from said circumferential surface which segments have been successively brought to said predetermined position;

a second roller provided under said first roller and having an axis parallel to said axis of said first roller, said second roller being adapted to be rotated to sequentially receive said sheet segments successively peeled off from said circumferential surface of said first roller; and,

a second peeler means for successively peeling off said sheet segments from said circumferential surface of





said second roller to supply them onto said moving surface,

said second roller including means provided on the circumferential surface thereof for receiving a leading portion of each of said sheet segments which has moved vertically down from said circumferential surface of said first roller so as to position and hold said leading portion on the circumferential surface of said second roller in the circumferential direction, said second roller further including surface means on said circumferential surface of said second roller for receiving a portion of each of said sheet segments following said leading portion of the same, the rotational speeds of said positioning and holding means and said surface means about the axis of said second roller are substantially equal to said predetermined speed of said moving surface and greater than the circumferential speed of said first roller so that said sheet segments received on said circumferential surface of said second roller are separated from each other at said predetermined interval at which said sheet segments or said sheets of said predetermined length are supplied onto said moving surface.

2. An apparatus as set forth in Claim 1 wherein said second roller includes sheet segment holding means provided on said circumferential surface thereof and having a radially outer surface adapted to receive and hold said sheet segment, a leading portion of said radially outer surface inclined radially inwardly as it approaches the leading edge thereof so that the inclined leading portion





functions as said positioning and holding means and the portion of said radially outer surface succeeding said inclined leading portion functions as said surface means.

3. An apparatus as set forth in Claim 1 or 2 further including an auxiliary roller having a horizontal axis and adapted to be rotatably engaged with said outer surface of said sheet segment received on said second roller to press the sheet segment against the second roller, whereby the segment is prevented from accidentally peeling off from the second roller.

4. An apparatus as set forth in Claim 3 wherein said auxiliary roller is arranged near said first peeler means and upstream of the same in the direction of rotation of said first roller and adapted to be moved from the position as arranged above by engagement thereof with the outer surface of said sheet segment on said second roller in rotation and to return to said arranged position after the auxiliary roller disengages from said outer surface of said sheet segment.



APPARATUS FOR SUPPLYING PASTE FOOD SHEETS
AT A PREDETERMINED INTERVAL

ABSTRACT OF THE DISCLOSURE

THIS SHEET HAS BEEN
REPLACED

An apparatus supplies food paste material sheets
5 at a predetermined interval on a surface moving at a pre-
determined speed. The apparatus includes a horizontally
arranged first roller adapted to be rotated to receive a
continuous food paste material sheet on the circumferential
surface thereof; means for severing the continuous sheet
10 on the circumferential surface at a predetermined interval
in the circumferential direction into a plurality of sheet
segments or the above-stated sheets; a first peeler means
provided at a predetermined position on the lower half
portion of the circumferential surface of the first
15 roller for peeling off the severed sheet segments from
the circumferential surface which segments have been
successively brought to the above-noted predetermined
position; and a second horizontally arranged roller
provided under the first roller. The second roller is
20 adapted to be rotated to sequentially receive the sheet
segments from the first roller. The apparatus includes
a second peeler means for peeling off the sheet segments
from the second roller to supply them onto the above-noted
moving surface. The second roller includes means provided
25 on the circumferential surface thereof for receiving
a leading portion of each of the sheet segments which
has moved vertically down from the first roller so as to
position and hold the leading portion. The rotational

This Sheet Has Been Replaced




speeds of the holding means are substantially equal to that of the moving surface and greater than the circumferential speed of said first roller.

THIS SHEET HAS BEEN
REPLACED

This Sheet Has Been Replaced



Fig. 2

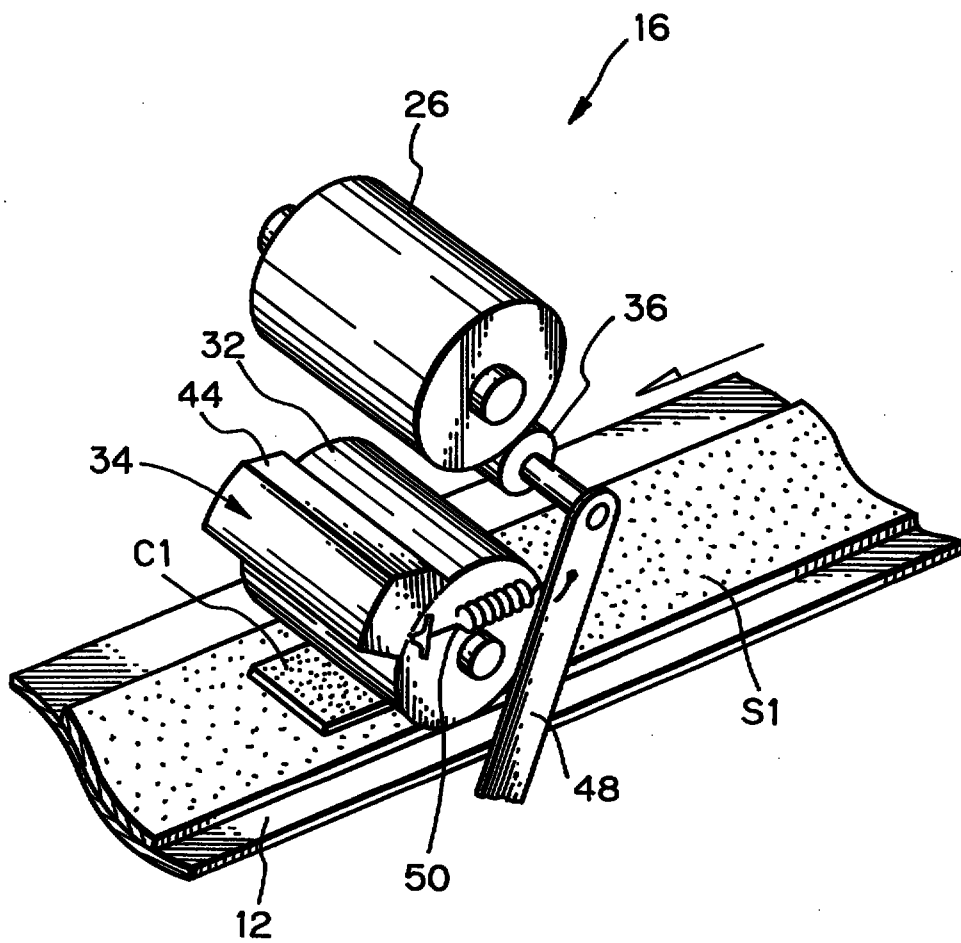

This Sheet Has Been Replaced



Fig. 4


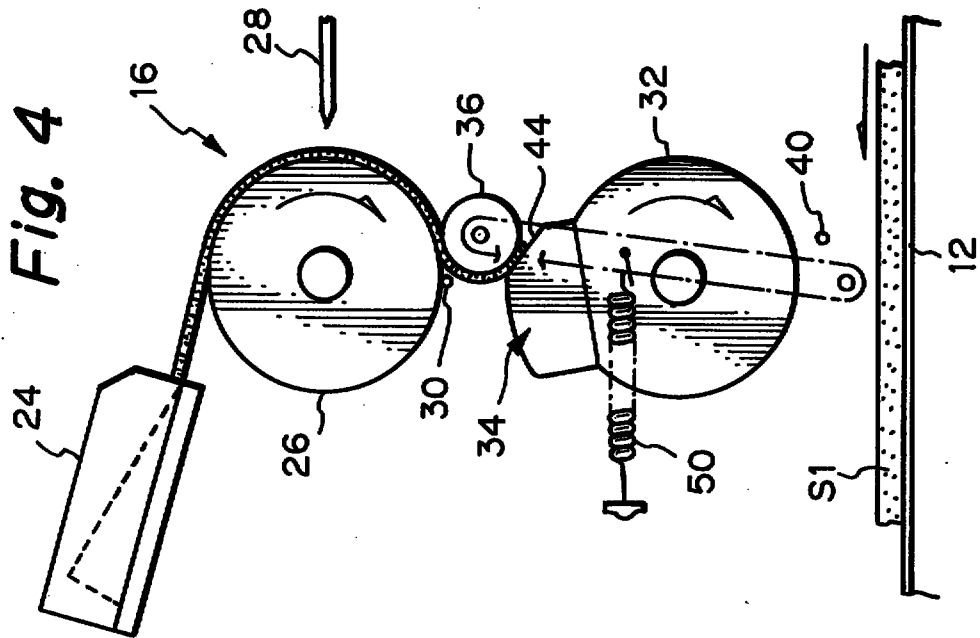


Fig. 3

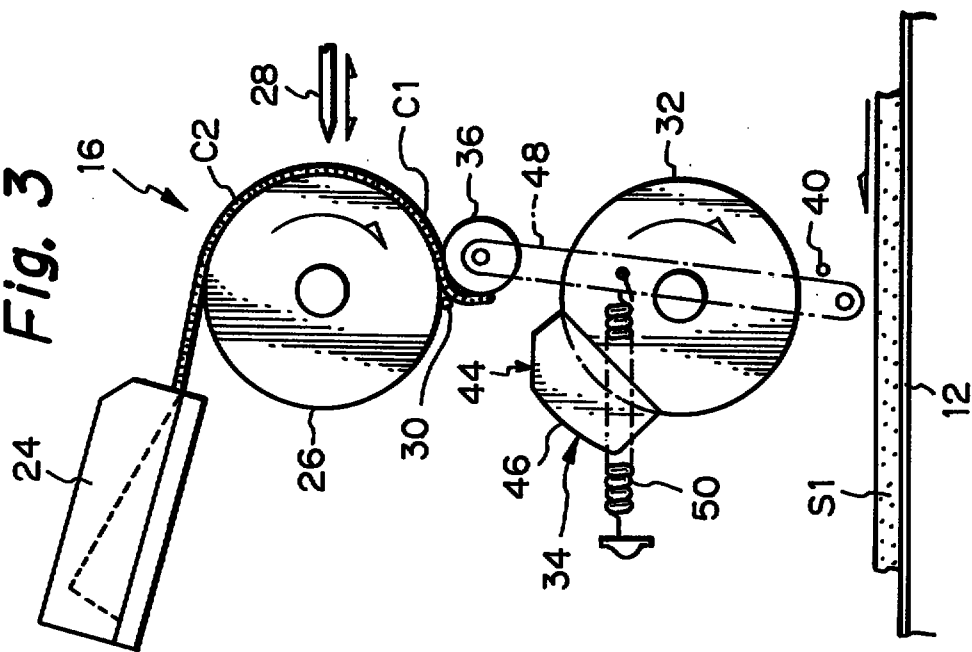

This Sheet Has Been Replaced



Fig. 5

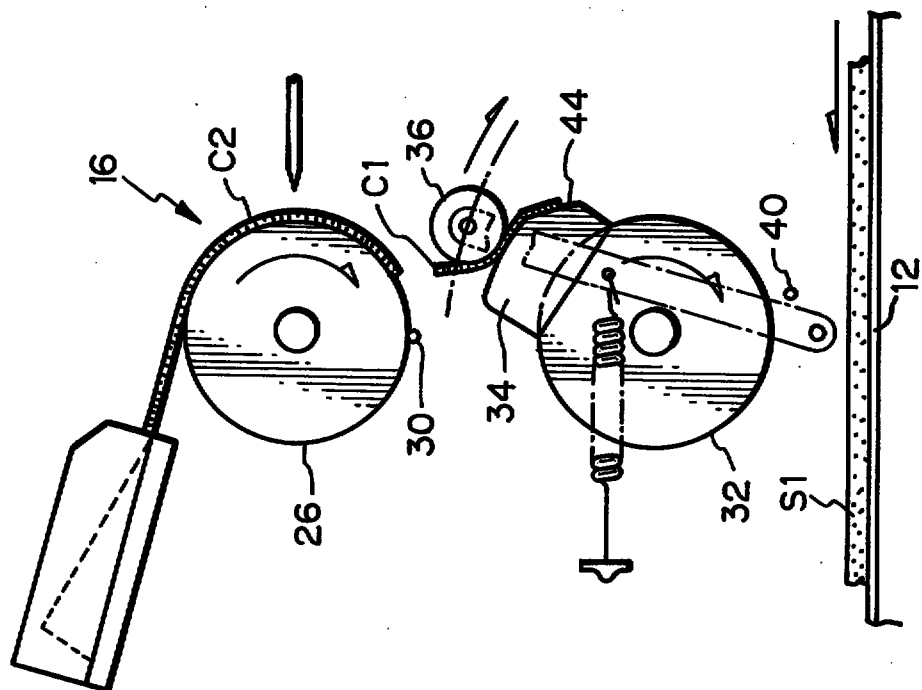


Fig. 6

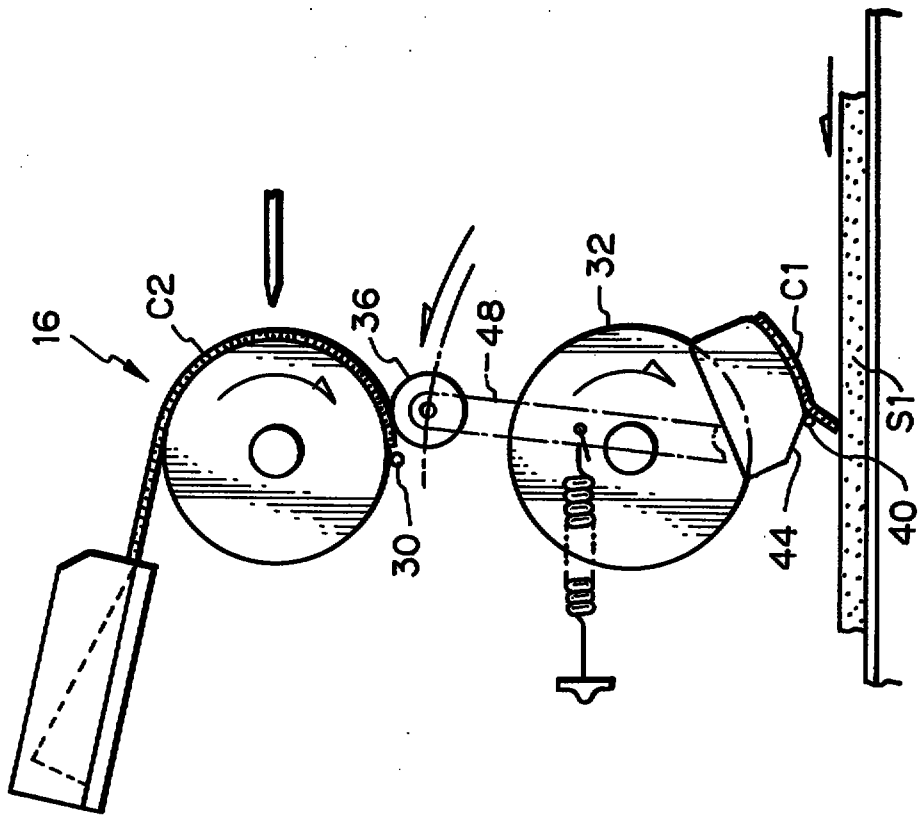


Fig. 7

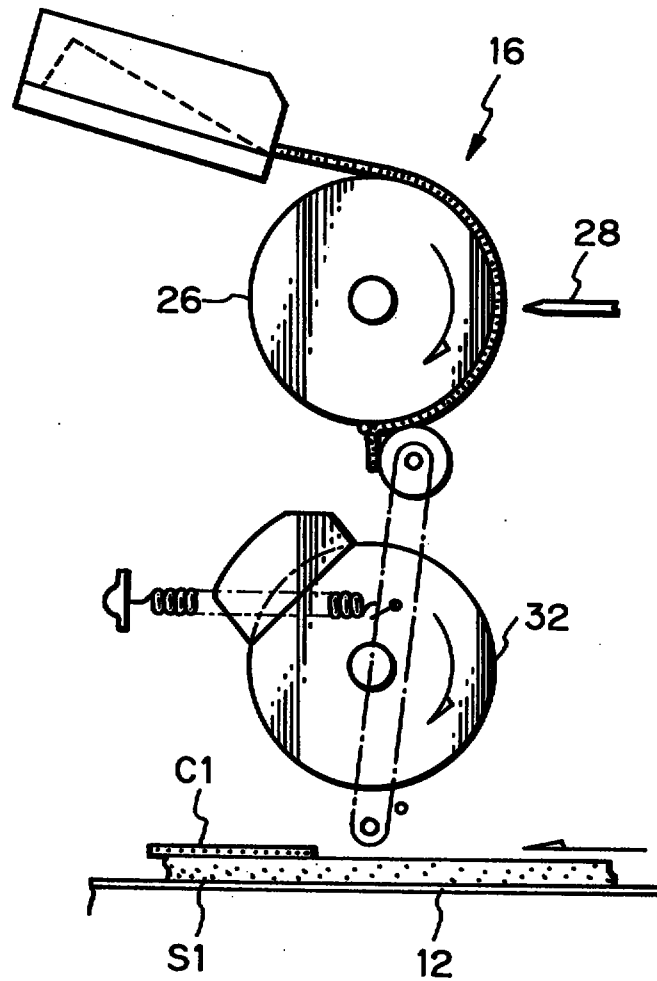


Fig. 8


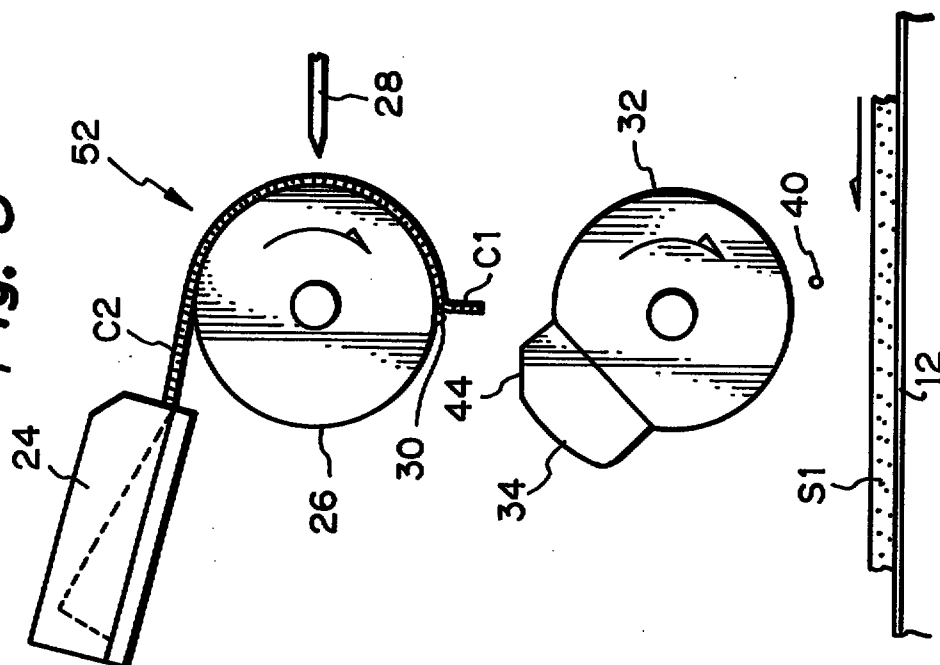


Fig. 9

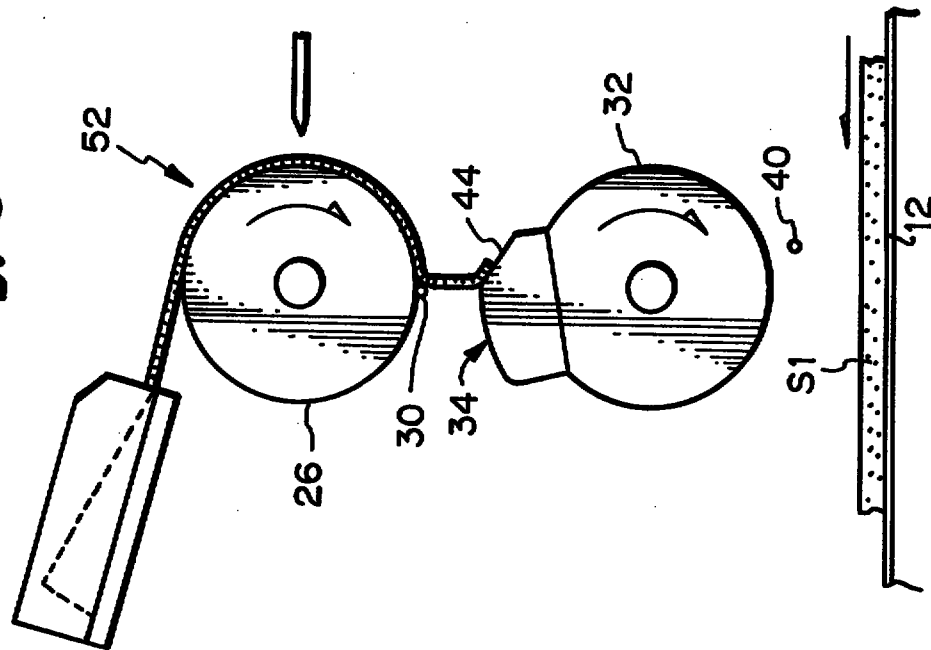

This Sheet Has Been Replaced



Fig. 11


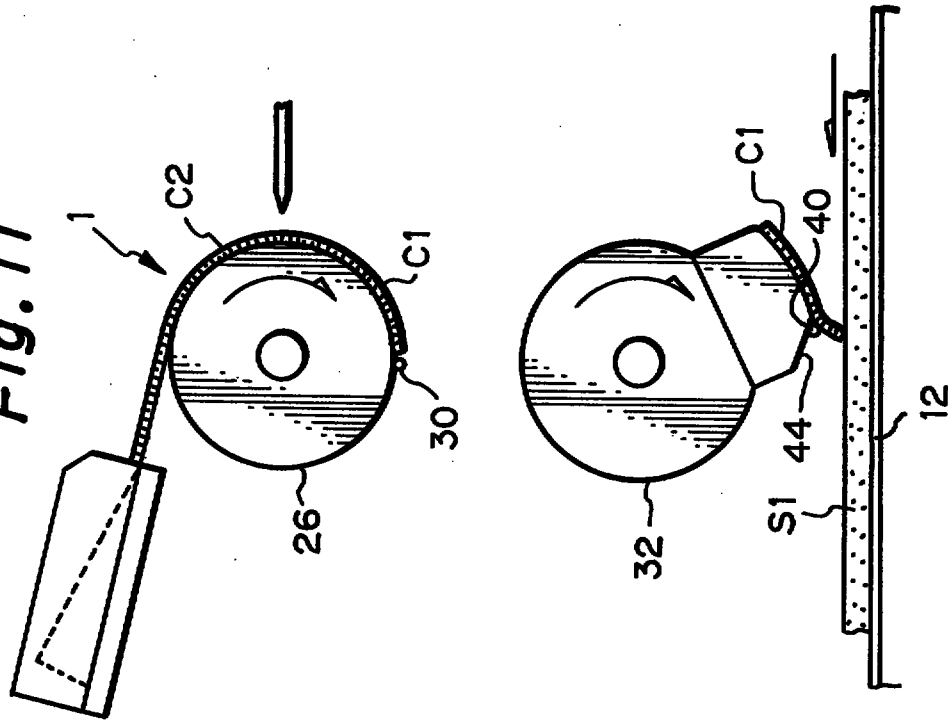


Fig. 10



This Sheet Has Been Replaced

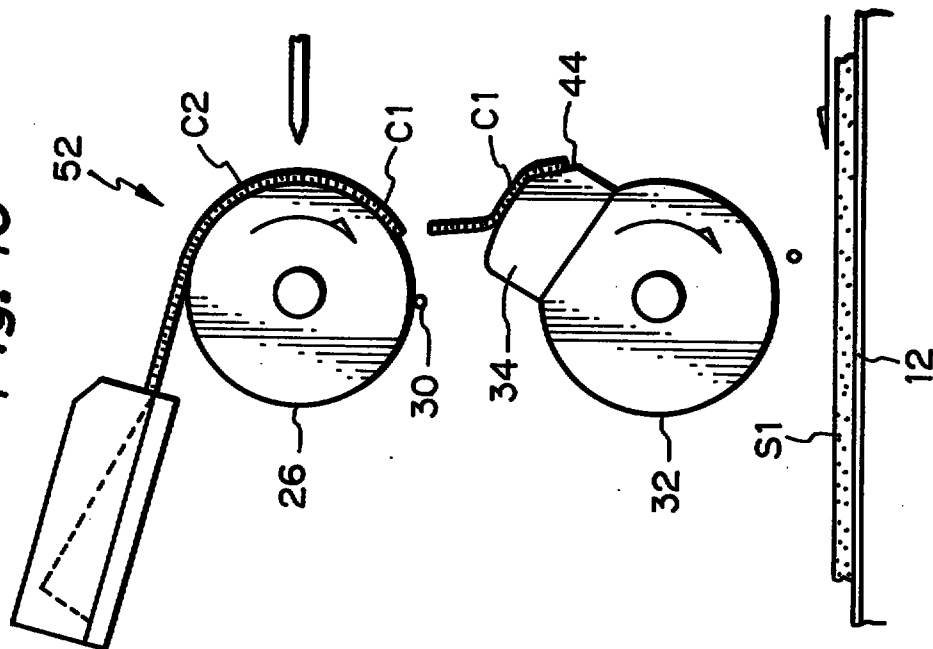

REPLAC	SHEETS	SG
☐ Description	: paged	to paged
☐ Claim(s)	: paged	to paged
☐ Drawing(s)	: paged	to paged
☐ Abstract	: paged	to paged

DATE OF RECEIPT APPARATUS FOR SUPPLYING PASTE FOOD SHEETS
AT A PREDETERMINED INTERVAL

REPLACEMENT SHEET
05 MAY 1997

-1-

BACKGROUND OF THE INVENTION

This invention relates to an apparatus for
5 supplying paste food sheets at a predetermined interval,
in particular, to an apparatus for forming paste food
material into a continuous sheet, severing the sheet into
a plurality of segments and supplying the sheet segments
or sheets at a predetermined interval.

10 Japanese Published Patent Application No. 6-14832
discloses an apparatus for supplying food paste sheets at
a predetermined interval, including a nozzle for shaping
paste food into an elongated or continuous sheet, a first
horizontal roller adapted to be rotated to receive the
15 continuous sheet of food paste, cutter means for cutting
the sheet received on the circumferential surface of the
first roller at a predetermined interval, first peeler
means for peeling off the cut sheet segments from the
first roller, a second horizontal roller provided under the
20 first roller and adapted to be rotated at a speed greater
than that of the first roller to receive the sheet segments
peeled from the first roller on the circumferential surface
thereof in such a manner that the sheet segments are spaced
from each other and second peeler means for peeling off
25 the sheet segments from the second roller to supply them
at a predetermined interval.

However, the apparatus stated above gives rise
to a problem in that the sheet segments supplied on the

05 MAY 1997

-2-

circumferential surface of the second roller are prone to be displaced from their regular position, and thus it is difficult to supply them from the second roller at an accurate interval.

5 SUMMARY OF THE INVENTION

Accordingly, it is an object of this invention to provide an apparatus which enables such sheets or sheet segments to be delivered at a predetermined interval accurately.

10 This invention provides an apparatus for supplying food paste material sheets of a predetermined length at a predetermined interval on a surface moving at a predetermined speed. The apparatus includes a first roller having an axis which is substantially horizontally set and
15 adapted to be rotated to receive a continuous food paste material sheet on the circumferential surface thereof; means for severing the continuous food paste material sheet on the circumferential surface at a predetermined interval into a plurality of sheet segments; a first peeler means
20 provided at a predetermined position on the lower half portion of the circumferential surface of the first roller for peeling off the severed sheet segments gradually from the leading edges of the same from the circumferential surface which segments have been successively brought to
25 the predetermined position; and a second roller provided under the first roller and having a horizontal axis. The second roller is adapted to be rotated to sequentially receive the sheet segments successively peeled off from the

05 MAY 1997

-3-

circumferential surface of the first roller. The apparatus further includes a second peeler means for successively peeling off the sheet segments from the second roller to supply them onto the above-noted moving surface. The

5 second roller includes means provided on the circumferential surface thereof for receiving a leading portion of each of the sheet segments which has moved vertically down from the circumferential surface of the first roller so as to position and hold the leading portion

10 on the circumferential surface of the second roller in the circumferential direction. The second roller further includes surface means on the circumferential surface of the second roller for receiving a portion of each of the sheet segments following the leading portion of the same.

15 The rotational speeds of the positioning and holding means and the surface means about the axis of the second roller are substantially equal to the predetermined speed of the above-noted moving surface and greater than the circumferential speed of the first roller so that the

20 sheet segments received on the circumferential surface of the second roller are separated from each other at the predetermined interval at which the sheet segments or the sheets of the predetermined length as noted above are supplied onto the moving surface.

25 In a preferred embodiment, the second roller includes sheet segment holding means provided on the circumferential surface thereof. The holding means has a radially outer surface adapted to receive and hold said

05 MAY 1997

-4-

sheet segment including a leading portion which inclines radially inwardly as it approaches the leading edge thereof so that the inclined leading portion functions as the above-noted positioning and holding means and the remaining
5 portion of the outer surface succeeding the inclined leading portion functions as the above-noted surface means. The apparatus further includes an auxiliary roller having a horizontal axis and adapted to be rotatably engaged with the outer surface of the sheet segment received on the
10 second roller to press the sheet segment against the second roller, whereby the segment is prevented from accidentally peeling off from the second roller. The auxiliary roller is arranged near the first peeler means and upstream of the same in the direction of rotation of the first roller and
15 adapted to be moved from the position as arranged above by engagement thereof with the outer surface of the sheet segment on the second roller in rotation and to return to the above-noted arranged position after the auxiliary roller disengages from the outer surface of the sheet
20 segment.

The foregoing and other objects of this invention will become clear from the following detailed description of preferred embodiments when taken in conjunction with the accompanying drawings.

25 BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic side elevation view of a multiply food production apparatus in which a food paste sheet supply apparatus in accordance with a first

embodiment of this invention is incorporated;

Fig. 2 is a perspective partial view of the apparatus of Fig. 1 to mainly show the food paste sheet supply apparatus;

5 Figs. 3 - 7 are side elevation views of the food paste sheet supply apparatus of Fig. 2 showing an operation thereof;

Figs. 8 - 11 are side elevation views of a food paste sheet supply apparatus in accordance with a second
10 embodiment of this invention showing an operation thereof.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 shows an apparatus 10 for producing multiply food F including three piled sheets. The apparatus includes an endless belt conveyor 12, a first nozzle 14
15 for forming a first continuous fish paste sheet S1 and supplying it onto the conveyor, an apparatus 16 for supplying rectangular cheese sheets C1 onto the first continuous fish paste sheet C1 at a predetermined interval, a second nozzle 18 for forming a second continuous fish
20 paste sheet S2 onto the first continuous fish paste sheet S2 with the rectangular cheese sheets C1, a cutter 20 for cutting the thus-formed continuous paste food material M into a plurality of segments or above-stated multiply food F which each includes one of the rectangular cheese sheets
25 and a hot water tank T adapted to receive the food segments F from the conveyor and subject them to heating process to produce final food products.

REPLACEMENT SHEET

05 MAY 1997

As shown in Figs. 1 and 2, the apparatus 16 includes a nozzle 24 for forming and supplying a continuous cheese sheet C2, a first roller 26 having a horizontal axis and adapted to be rotated to receive the continuous cheese sheet C2, a cutter 28 having a horizontal cutting edge and adapted to cut the continuous cheese sheet C2 at a pre-determined interval in the longitudinal direction of the sheet or in the circumferential direction of the first roller to thereby form a plurality of rectangular cheese sheets C1, a first peeler or horizontal piano wire 30 (Fig. 3) engaged with the circumferential surface of the roller 16 for peeling off the rectangular cheese sheets C1 gradually from the leading edge thereof from the first roller and a second roller 32 horizontally provided under the first roller. The second roller 32 is provided with a rectangular cheese sheet holding member 34 on the circumferential surface thereof which is adapted to receive one of the rectangular cheese sheets C1 on the radially outer surface thereof. The apparatus further includes an auxiliary roller 36 adapted to be rotatably engaged with the outer surface of the cheese paste sheet C1 on the cheese sheet holding member 34 to press the rectangular cheese sheet against the radially outer surface of the cheese sheet holding member 34 and a second peeler or horizontal piano wire 40 (Fig. 3) adapted to peel off the cheese segment from the radially outer surface of the cheese sheet holding member 34.

REPLACEMENT SHEET

05 MAY 1997

As shown in Figs. 3 - 7, the radially outer surface of the cheese sheet holding member 34 includes an inclined leading portion 44 which is inclined radially inwardly as it approaches the leading edge thereof and functions as
5 a means for receiving and holding the leading portion of the rectangular cheese sheet C1 (Fig. 4) and an arch surface portion 46 succeeding the leading portion 44 having a radius centering the axis of the second roller 32 and adapted to receive the remaining portion of the rectangular
10 cheese sheet succeeding the leading edge portion of the same held by the inclined leading portion of the radially outer surface of the holding member 34 (Fig. 5).

The auxiliary roller 36 is provided on the top end of an arm 48 which is pivotably mounted on an apparatus
15 frame (not shown) at the point under the second roller 32 and arranged to be usually set at the position shown in Fig. 3. In this position, the circumferential surface of the auxiliary roller 36 is near to but spaced from the circumferential surface of the first roller 26 to allow
20 the rectangular cheese sheets C1 on the latter surface to pass between these surfaces toward the first peeler or horizontal piano wire 30 and is positioned where the inclined leading portion 44 of the radially outer surface of the cheese sheet holding member 34 passes. The arm 48
25 is biased by a spring 50 in a counterclockwise direction and stopped by a stopper (not shown) such that the auxiliary roller 36 is positioned at the above-stated usual position.

REPLACEMENT SHEET

05 MAY 1997

05 MAY 1997

-8-

As shown in Fig. 3, the rectangular cheese sheet C1 which has reached the first peeler 30 is peeled off by the peeler from the circumferential surface of the first roller 26 and moves vertically down toward the second roller 32.


5 The second roller is rotated at a speed greater than that of the first roller such that each revolution of the second roller enables the second roller to receive a single rectangular cheese sheet C1 from the first roller 26 and to transfer it onto the first continuous fish paste sheet

10 S1. The leading portion of the rectangular cheese sheet C1 moving down from the first roller 26 is engaged and held by the inclined leading portion 44 of the radially outer surface of the rectangular cheese sheet holding means 34 (Fig. 4) and the remaining portion of the rectangular

15 cheese sheet C1 succeeding the leading portion of the sheet is received by the portion 46 of the radially outer surface succeeding the inclined leading portion 44 of the same. The auxiliary roller 36 rotatably engages with the rectangular cheese sheet held on the holding member 34 to

20 press the sheet against the radially outer surface of the holding member 34 to thereby prevent the cheese sheet from accidentally peeling off from the surface. Due to the positional difference between the center of rotation of the holding member and the pivotal pin of the arm 48, the

25 auxiliary roller 36 is pivoted in a clockwise direction by the engagement with the radially outer surface of the holding member 34 or the rectangular cheese sheet thereon against the bias force of the spring 50 and, upon

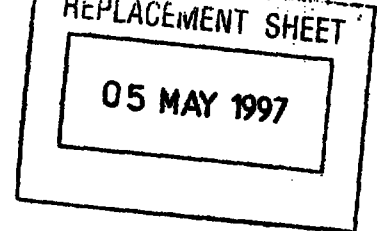

-9-

disengagement of the auxiliary roller 36 from the radially
outer surface of the holding member, the roller is returned
to its usual position by the spring 50 as shown in Fig. 6.
The second peeler or horizontal piano wire 40 is positioned
5 under the second roller near the endless conveyor 12 where
the outer surface of the rectangular cheese sheet holding
member 34 passes so that the rectangular cheese sheet C1
held on the outer surface of the holding member 34 and
brought to the wire is peeled off gradually from the
10 leading edge thereof from the outer surface of the holding
member by the wire and received by the first continuous
fish paste sheet S1 conveyed by the endless conveyor which
is driven at the same speed as the speed of the rectangular
cheese sheet held on the holding member 34 (Figs. 6 and 7).

15 Accordingly, the rectangular cheese sheets or sheet
segments supplied on the continuous fish paste sheet are
spaced from each other at regular intervals.

Figs. 8 - 11 show a food paste sheet supply
apparatus 52 in accordance with the second embodiment of
20 this invention. As shown, the apparatus of this embodiment
is substantially the same as that of the first embodiment
except that the former apparatus does not include the
auxiliary roller 36 as provided in the latter apparatus.
The apparatus of this embodiment is suitable for use when
25 the cheese paste used to form cheese paste sheets or sheet
segments as stated above has viscosity enough to attach
to the surface of the cheese sheet holding member 34 by
itself.

05 MAY 1997



-10-

WHAT IS CLAIMED IS:

1. An apparatus for supplying food paste material sheets of a predetermined length at a predetermined interval on a surface moving at a predetermined speed, said apparatus including:

a first roller having an axis which is substantially horizontally set and adapted to be rotated to receive a continuous or elongated food paste material sheet on the circumferential surface thereof;

a means for severing said continuous food paste material sheet on said circumferential surface at a predetermined interval in the circumferential direction into a plurality of sheet segments or said sheets of said predetermined length;

a first peeler means provided at a predetermined position on the lower half portion of said circumferential surface of said first roller for peeling off said severed sheet segments gradually from the leading edges of the same from said circumferential surface which segments have been successively brought to said predetermined position;

a second roller provided under said first roller and having an axis parallel to said axis of said first roller, said second roller being adapted to be rotated to sequentially receive said sheet segments successively peeled off from said circumferential surface of said first roller; and,

a second peeler means for successively peeling off said sheet segments from said circumferential surface of

This Sheet Has Been Replaced

THIS SHEET HAS BEEN
REPLACED



This Sheet Has Been Replaced



-11-

said second roller to supply them onto said moving surface,

said second roller including means provided on the circumferential surface thereof for receiving a leading portion of each of said sheet segments which has moved vertically down from said circumferential surface of said first roller so as to position and hold said leading portion on the circumferential surface of said second roller in the circumferential direction, said second roller further including surface means on said circumferential surface of said second roller for receiving a portion of each of said sheet segments following said leading portion of the same, the rotational speeds of said positioning and holding means and said surface means about the axis of said second roller are substantially equal to said predetermined speed of said moving surface and greater than the circumferential speed of said first roller so that said sheet segments received on said circumferential surface of said second roller are separated from each other at said predetermined interval at which said sheet segments or said sheets of said predetermined length are supplied onto said moving surface.

2. An apparatus as set forth in Claim 1 wherein said second roller includes sheet segment holding means provided on said circumferential surface thereof and having a radially outer surface adapted to receive and hold said sheet segment, a leading portion of said radially outer surface inclined radially inwardly as it approaches the leading edge thereof so that the inclined leading portion

REPLACEMENT SHEET

05 MAY 1997


THIS SHEET HAS BEEN
REPLACED



functions as said positioning and holding means and the portion of said radially outer surface succeeding said inclined leading portion functions as said surface means.

3. An apparatus as set forth in Claim 1 or 2 further including an auxiliary roller having a horizontal axis and adapted to be rotatably engaged with said outer surface of said sheet segment received on said second roller to press the sheet segment against the second roller, whereby the segment is prevented from accidentally peeling off from the second roller.

4. An apparatus as set forth in Claim 3 wherein said auxiliary roller is arranged near said first peeler means and upstream of the same in the direction of rotation of said first roller and adapted to be moved from the position as arranged above by engagement thereof with the outer surface of said sheet segment on said second roller in rotation and to return to said arranged position after the auxiliary roller disengages from said outer surface of said sheet segment.

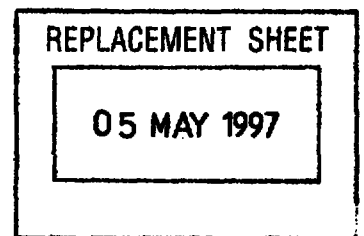

This Sheet Has Been Replaced



05 MAY 1997

-13-

APPARATUS FOR SUPPLYING PASTE FOOD SHEETS
AT A PREDETERMINED INTERVAL

ABSTRACT OF THE DISCLOSURE

THIS SHEET HAS BEEN
REPLACED

An apparatus supplies food paste material sheets

5 at a predetermined interval on a surface moving at a predetermined speed. The apparatus includes a horizontally arranged first roller adapted to be rotated to receive a continuous food paste material sheet on the circumferential surface thereof; means for severing the continuous sheet

10 on the circumferential surface at a predetermined interval in the circumferential direction into a plurality of sheet segments or the above-stated sheets; a first peeler means provided at a predetermined position on the lower half portion of the circumferential surface of the first

15 roller for peeling off the severed sheet segments from the circumferential surface which segments have been successively brought to the above-noted predetermined position; and a second horizontally arranged roller provided under the first roller. The second roller is

20 adapted to be rotated to sequentially receive the sheet segments from the first roller. The apparatus includes a second peeler means for peeling off the sheet segments from the second roller to supply them onto the above-noted moving surface. The second roller includes means provided

25 on the circumferential surface thereof for receiving a leading portion of each of the sheet segments which has moved vertically down from the first roller so as to position and hold the leading portion. The rotational

This Sheet Has Been Replaced



speeds of the holding means are substantially equal to that of the moving surface and greater than the circumferential speed of said first roller.

FIG. 1

THIS SHEET HAS BEEN
REPLACED

REPLACEMENT SHEET

05 MAY 1997

This Sheet Has Been Replaced



Fig. 1





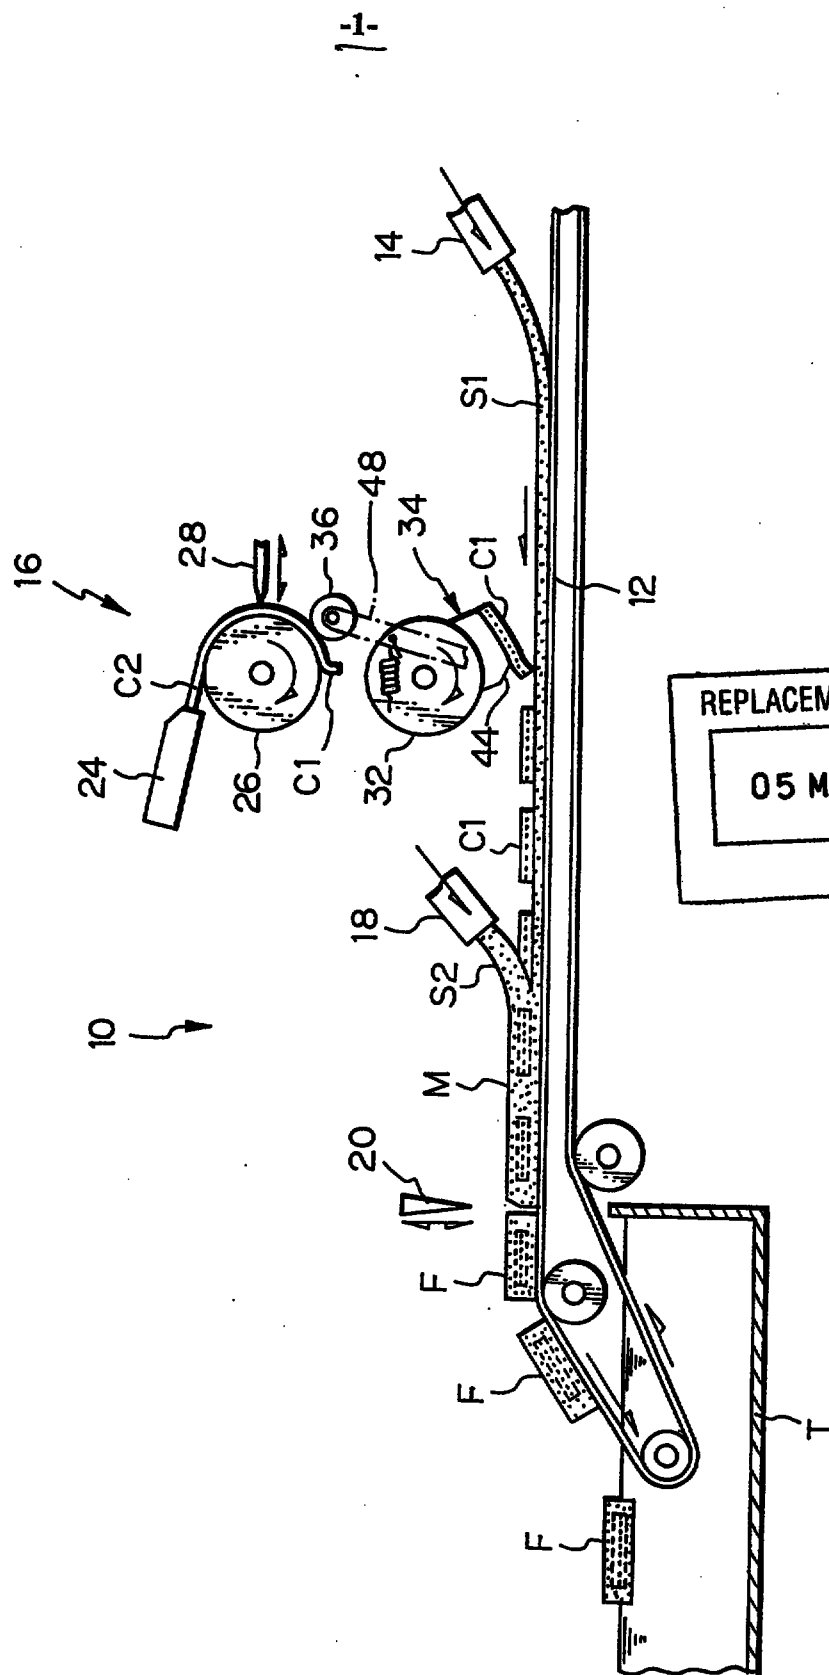


Fig. 2

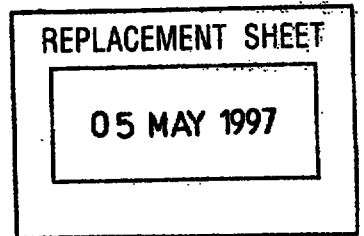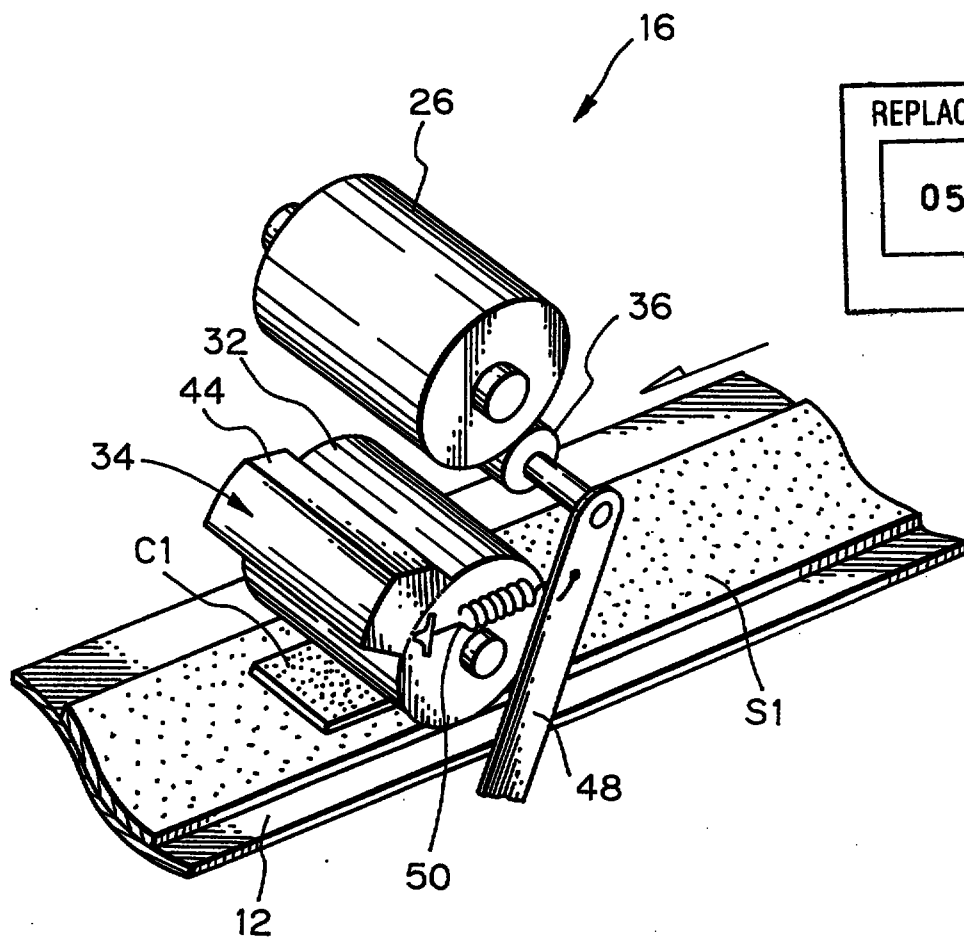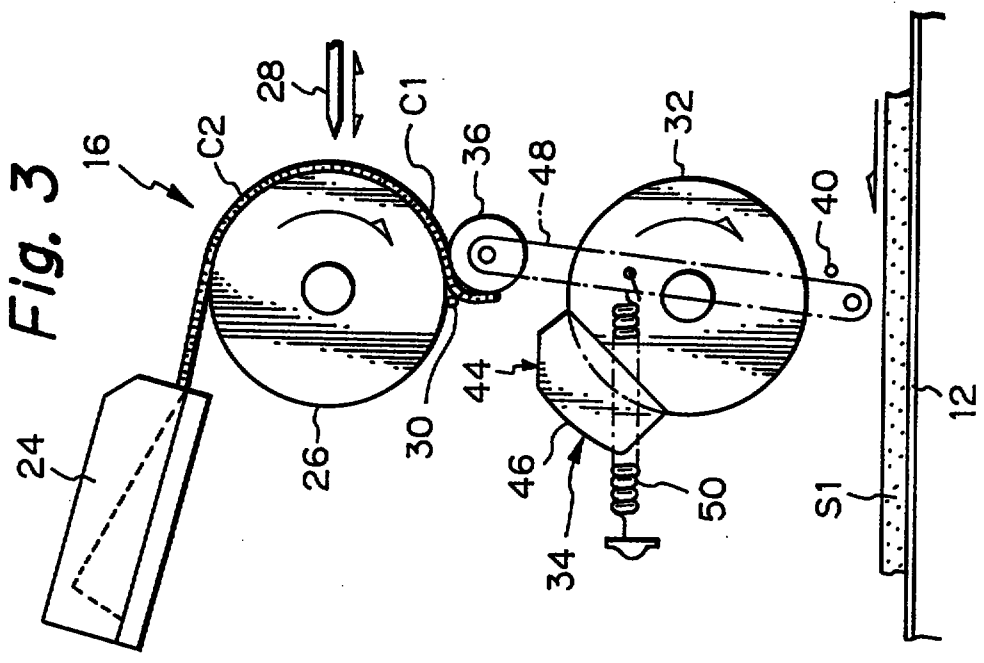

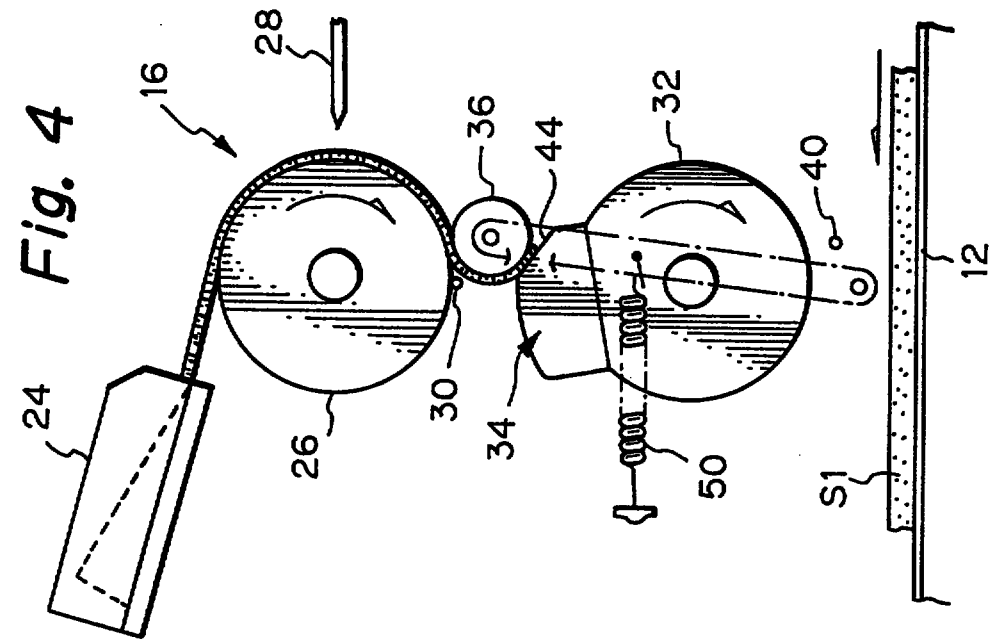

05 MAY 1997

Fig. 6


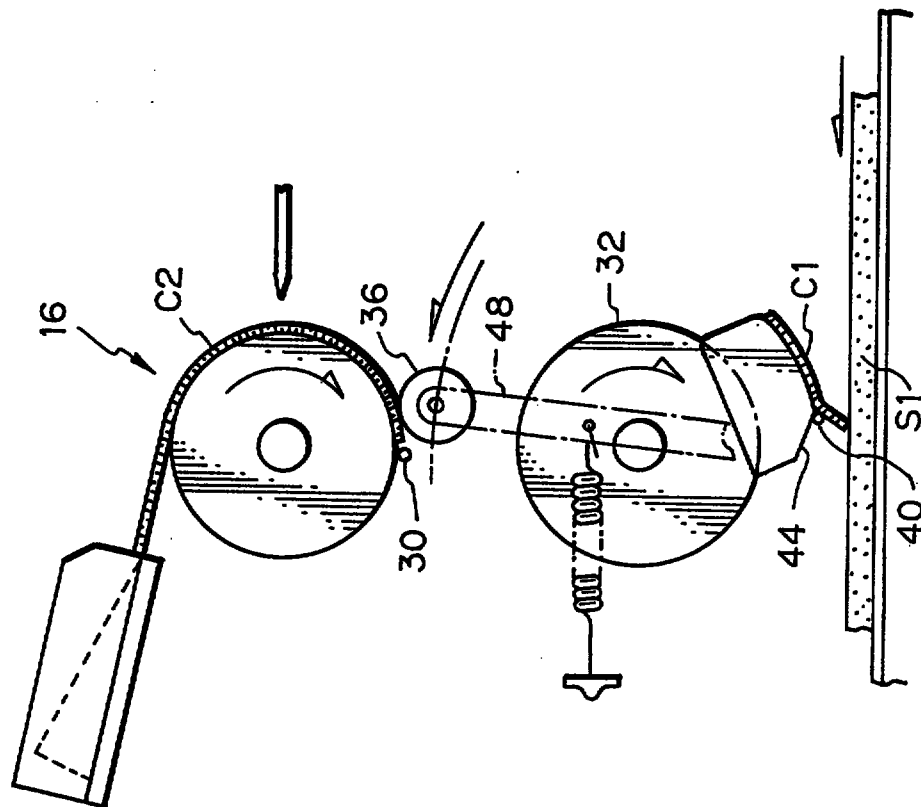



Fig. 5

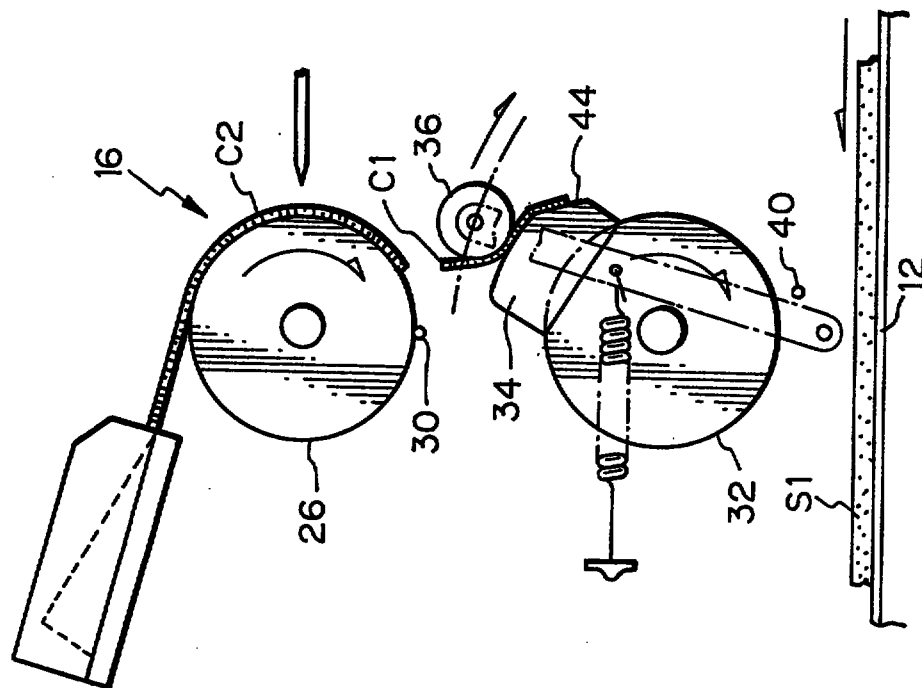

REPLACEMENT SHEET

05 MAY 1997

Fig. 7

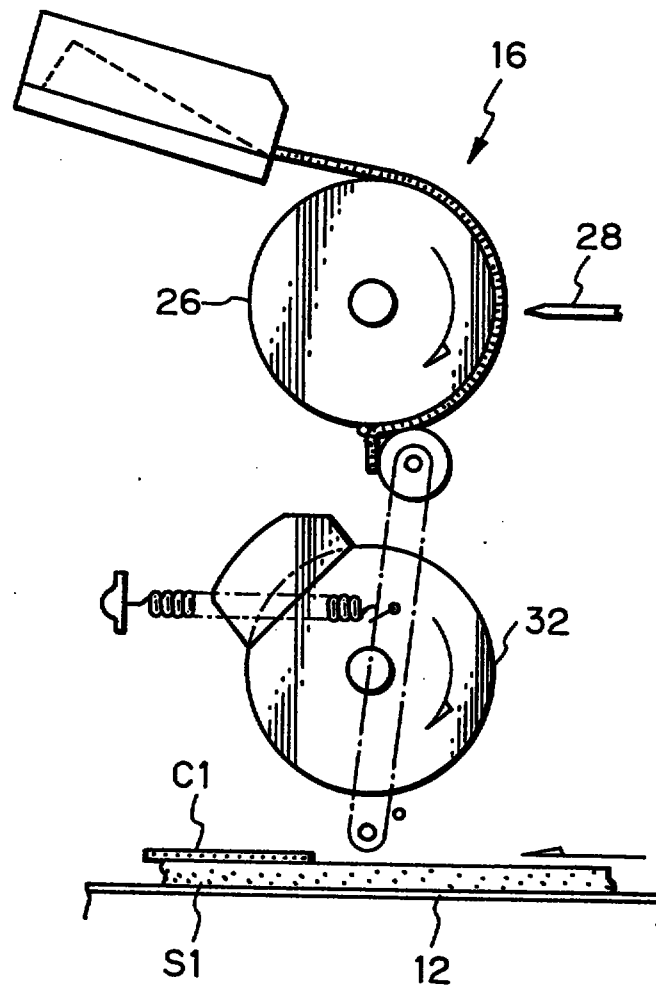

05 MAY 1997

16

Fig. 9

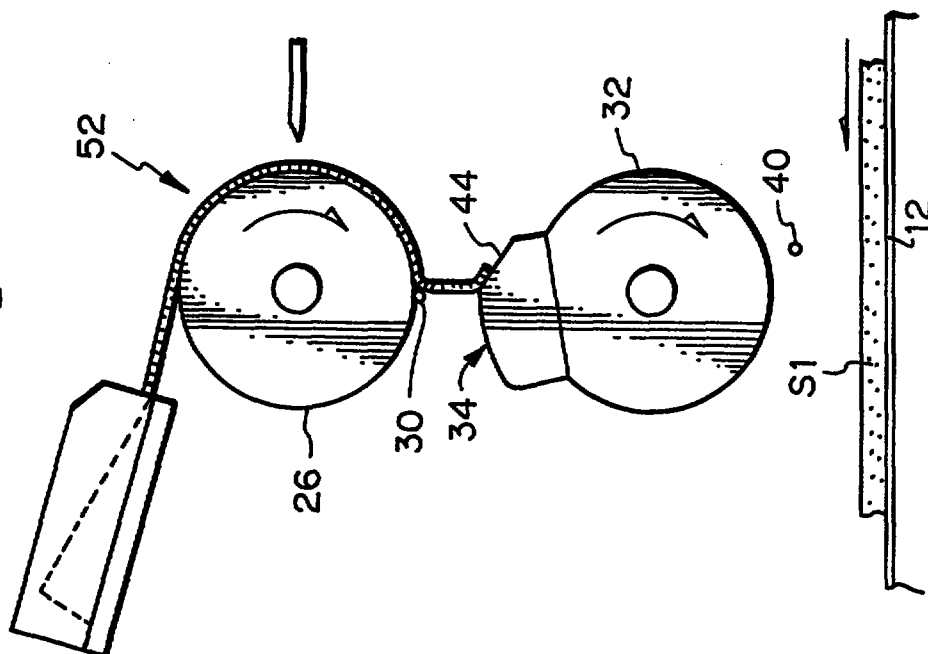


Fig. 8

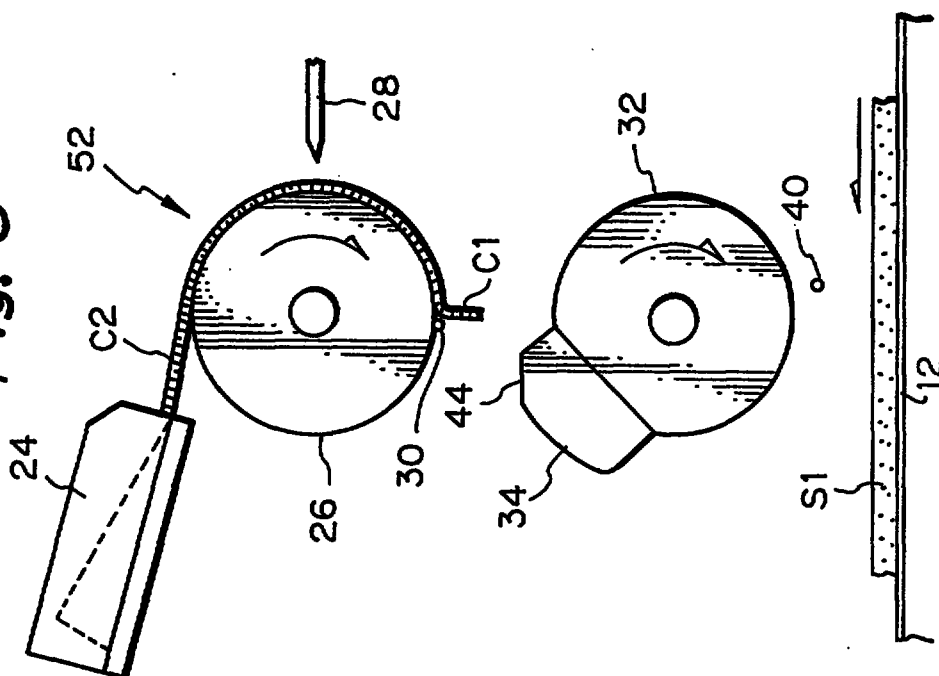


Fig. 11


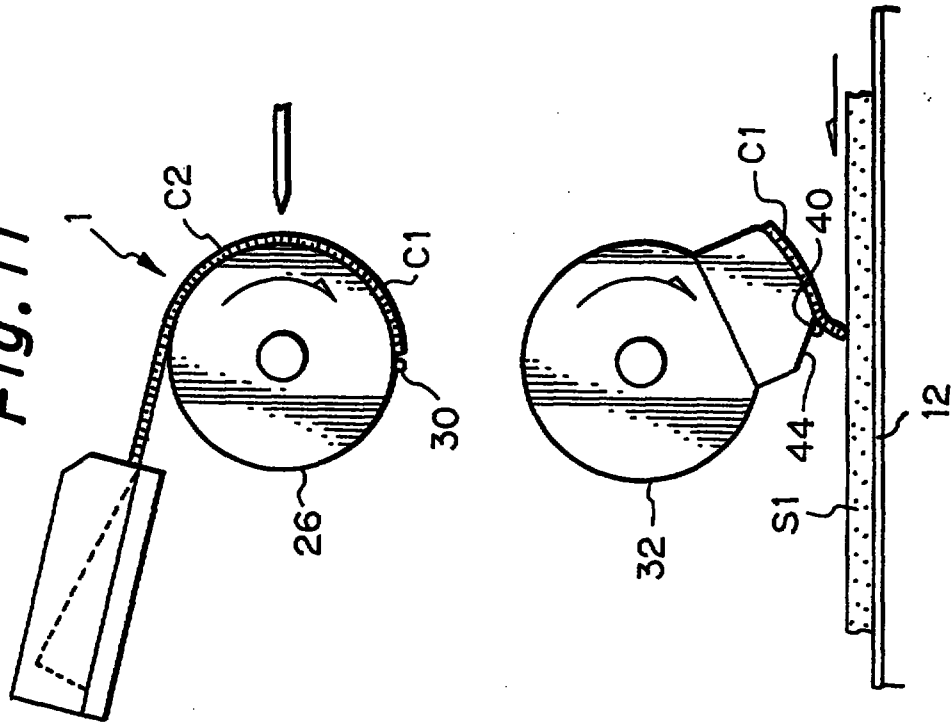


Fig. 10

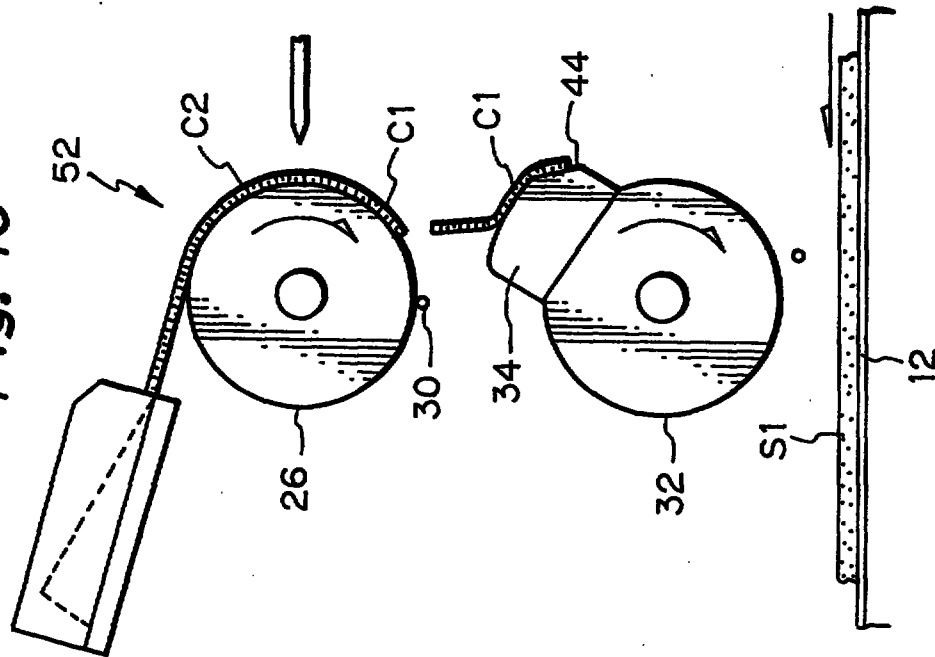

Box III **TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)**

An apparatus (10) supplies food paste material sheets (C1) at a predetermined interval on a surface (12) moving at a predetermined speed. The apparatus includes a horizontally arranged first roller (26) adapted to be rotated to receive a continuous food paste material sheet (C2) on the circumferential surface thereof; means for severing (28) the continuous sheet on the circumferential surface at a predetermined interval in the circumferential direction into a plurality of sheet segments or the above-stated sheets (C1); a first peeler means provided at a predetermined position on the lower half portion of the circumferential surface of the first roller (26) for peeling off the severed sheet segments (C1) from the circumferential surface which segments have been successively brought to the above-noted predetermined position; and a second horizontally arranged roller (32) provided under the first roller (26). The second roller (32) is adapted to be rotated to sequentially receive the sheet segments (C1) from the first roller (26). The apparatus includes a second peeler means for peeling off the sheet segments (C1) from the second roller to supply them onto the above-noted moving surface (12). The second roller (32) includes means (34) provided on the circumferential surface thereof for receiving a leading portion of each of the sheet segments (C1) which has moved vertically down from the first roller (26) so as to position and hold the leading portion. The rotational speeds of the holding means (34) are substantially equal to that of the moving surface (12) and greater than the circumferential speed of said first roller (26).


REPLACEMENT SHEET

06 APR 1999



-10-

CLAIMS



1. An apparatus for supplying food paste material sheets of a predetermined length at a predetermined interval on a surface moving at a predetermined speed, said apparatus including:

a first roller having an axis which is substantially horizontally set and adapted to be rotated to receive a continuous or elongated food paste material sheet on the circumferential surface thereof;

- a means for severing said continuous food paste material sheet on said circumferential surface at a predetermined interval in the circumferential direction into a plurality of sheet segments or said sheets of said predetermined length;

- a first peeler means provided at a predetermined position on the lower half portion of said circumferential surface of said first roller for peeling off said severed sheet segments gradually from the leading edges of the same from said circumferential surface which segments have been successively brought to said predetermined position;


- a second roller provided under said first roller and having an axis parallel to said axis of said first roller and a circumferential surface, said second roller including a holding member provided on said circumferential surface thereof and having a radially outer surface which is radially outwardly spaced away from said circumferential surface of said second roller and faces radially outwardly, said radially outer surface being adapted to sequentially receive said sheet segments successively peeled

9700323-0
29/6/99



THIS SHEET HAS BEEN
REPLACED

-11-



off from said circumferential surface of said first roller and to positively hold said sheet segments thereon; and,

a second peeler means for successively peeling off said sheet segments from said radially outer surface of said holding member to
5 supply them onto said moving surface,

the rotational speed of said radially outer surface being substantially equal to said predetermined speed of said moving surface and greater than the circumferential speed of said first roller so that said sheet segments which are received on said radially outer surface and transferred
10 onto said moving surface are separated from each other at said predetermined interval.

2. An apparatus as set forth in Claim 1 wherein a leading portion of said radially outer surface is inclined radially inwardly as it approaches the leading edge thereof so that the inclined leading portion positively holds
15 said sheet segment.

3. An apparatus as set forth in Claim 1 or 2 further including an auxiliary roller having a horizontal axis and adapted to be rotatably engaged with said outer surface of said sheet segment received on said radially outer surface to press the sheet segment against said radially outer
20 surface, whereby the segment is prevented from accidentally peeling off from said holding member.

4. An apparatus as set forth in Claim 3 wherein said auxiliary roller is arranged near said first peeler means and upstream of the same in the direction of rotation of said first roller and adapted to be moved from the

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

-12-


REPLACEMENT SHEET

29 JUN 1999

position as arranged above by engagement thereof with the outer surface
of said sheet segment on said holding member on said second roller which
rotates around its axis in the same direction as said first roller rotates
around its axis and to return to said arranged position after the auxiliary
5 roller disengages from said outer surface of said sheet segment.

This Sheet Has Been Replaced



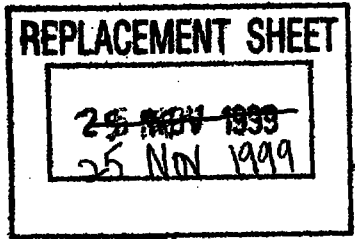

off from said circumferential surface of said first roller and to positively hold said sheet segments thereon; and,

a second peeler means for successively peeling off said sheet segments from said radially outer surface of said holding member to supply them onto said moving surface,

the rotational speed of said radially outer surface being substantially equal to said predetermined speed of said moving surface and greater than the circumferential speed of said first roller so that said sheet segments which are received on said radially outer surface and transferred onto said moving surface are separated from each other at said predetermined interval.


2. An apparatus as set forth in Claim 1 wherein a leading portion of said radially outer surface is inclined radially inwardly as it approaches the leading edge thereof so that the inclined leading portion positively holds said sheet segment.

3. An apparatus as set forth in Claim 1 or 2 further including an auxiliary roller having a horizontal axis and adapted to be rotatably engaged with said outer surface of said sheet segment received on said radially outer surface to press the sheet segment against said radially outer surface, whereby the segment is prevented from accidentally peeling off from said holding member.

4. An apparatus as set forth in Claim 3 wherein said auxiliary roller is arranged near said first peeler means and upstream of the same in the direction of rotation of said first roller and adapted to be moved from the



-12-

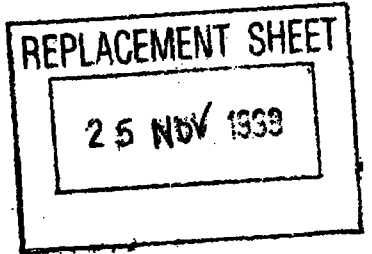

position as arranged above by engagement thereof with the outer surface
of said sheet segment on said holding member on said second roller

and to return to said arranged position after the auxiliary roller
disengages from said outer surface of said sheet segment, wherein the
second roller rotates in the same direction as the first roller.