



(51) International Patent Classification:
E21B 34/10 (2006.01)

(21) International Application Number:
PCT/EP2011/052211

(22) International Filing Date:
15 February 2011 (15.02.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20100228 16 February 2010 (16.02.2010) NO

(71) Applicant (for all designated States except US):
Petroleum Technology Company AS [NO/NO]; Slettes-
trandveien 13, N-4032 Stavanger (NO).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KLEPPA, Erling**
[NO/NO]; Klovsteinsveien 17, N-4100 Jørpeland (NO).
PETTERSEN, Ståle [NO/NO]; Skaret 3, N-4326
Sandnes (NO). **SEVHEIM, Ole** [NO/NO]; Armauer
Hansens vei 42d, N-4019 Stavanger (NO). **STOKKA,**
Øyvind [NO/NO]; Veslefrikkvegen 11, N-4315 Sandnes
(NO).

(74) Agents: **LANGAN, Hans** et al.; c/o ONSAGERS AS,
P.O.Box 6963 St. Olavs Plass, N-0130 Oslo (NO).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) Title: A VALVE DEVICE FOR A SIDE POCKET OR A SUB IN A WELL

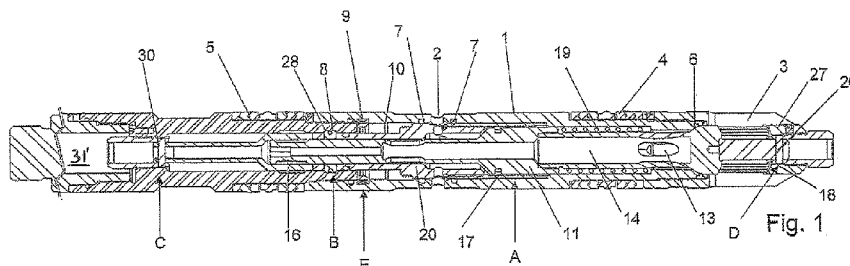

(57) Abstract: The present invention relates to a valve device for use in a side pocket and/or sub in a well, comprising a housing (1) with a first port (2) and a second port (3), a first valve body (11) movably mounted internally in the housing (1), a second valve body (20) mounted internally in the housing (1) and movable relative to both the housing (1) and the first valve body (11), where a first locking device (A) is configured between the first valve body (11) and the second valve body (20) in order to lock the movement of the first valve body (11) relative to the second valve body (20) in one direction and in such a manner that when the first locking device (A) is activated, the first valve body (11) is held in an open position as long as the second valve body (20) is in an open position, thereby providing through-flow through the valve device, and a third locking device (C) configured between the second valve body (20) and the housing (1), with the result that release of the third locking device (C) will permit movement of the second valve body (20) relative to the housing (1) and thereby to a closed position of the valve device, thereby also permitting the first valve body (11) to go to a closed position. The invention also relates to a method.