

ABSTRACT**A FIXING DEVICE FOR SECURING CONDUITS TO SUPPORT STRUCTURES**

A fixing device for securing elongate articulus such as conduits to a support structure, especially to cableways/cable riser, consisting of a clamp comprising a clamp opening (1a) provided with a U-shaped jaw (1) having attaching members (6, 7) for interaction with complementary attaching members in the support structure, a closure means comprising a closure arm pivotally mounted at the mouth of the clamp opening (1a) for the retention of the conduits placed in the clamp opening (1a). The closure arm is formed by a ratchet arm (3) pivotally mounted by one of its ends (3a) at one side of the clamp opening (1a) near the mouth thereof, and the second free end of which forms an engaging end (3b), and is designed for snap engagement with the locking member (2) of complementary configuration at the opposite side of the clamp opening (1a) for pressing the conduit into the clamp opening (1a) and retaining it therein, and the attaching members (6, 7) are provided on the other side of the jaw (1) opposite the mouth of the clamp opening (1a) and comprise projecting hooks (6, 7) with hook openings (6a, 7a), facing either towards or away from each other, for engagement with said complementary attaching members in the support structure, e.g., edges of the apertures (13) in the cableway/cable riser (14).

Fig . 2

disclosed in the characterizing clause in independent claim 1 hereinbelow and also in the subsequent dependent claims.

5 The invention will be explained in more detail hereinbelow with reference to the drawing which illustrates an exemplary embodiment of the fixing device according to the invention and which also shows how said device is mounted and how the conduit is positioned in the clamp of the fixing device.

10 Reference is now made to the drawing wherein:

Figure 1 is a perspective view of the fixing device seen at an angle from above with the jaw and the ratchet arm taken apart from one another and with the resilient movable attaching member locked in the engagement position by means of an eccentric member turned to the closure position by means of an operating arm, said operating arm also being indicated in dotted lines with the eccentric member in the passive position.

20 Figure 2 shows the same as figure 1 with the ratchet arm mounted in the passive position and operating arm in the upwardly pivoted passive position.

25 Figures 3a and 3b illustrate an embodiment of the ratchet arm in perspective seen from above and below, respectively.

Figures 4a and 4b are perspective views of the locking member seen looking towards the locking teeth and seen from behind.

30 Figure 5 depicts the clamp of the fixing device in section seen looking towards the main surface of the clamp and the clamp opening and with the ratchet arm and operating arm of the attaching member in passive positions.

35 Figure 6 illustrates the fixing device mounted on an underlying support structure in the form of a cableway, a fragment of which being shown in cross-section, with the operating arm in

the active position and with the conduit positioned in the clamp opening and with the ratchet arm in the active position for retaining the conduit, and also a further fixing device mounted on top of the first fixing device with a conduit placed therein that is of smaller dimension than the first-mentioned conduit and with the ratchet arm in a second active retaining position.

Figures 7a, b, c, d and e illustrate as follows:

- 10 a: the fixing device in perspective in the passive position ready for mounting on to the cableway,
- b: the fixing device mounted by means of attaching members in slots in the cableway and with the operating arm pivoted down to hold the first attaching member in the form of a hook in engagement with an edge of a slot whilst the second attaching member in the form of a hook is in engagement (not shown) with the edge of a second slot parallel to and spaced apart from the first slot,
- 15 c: the fixing device mounted and a conduit placed therein and with the ratchet arm in the passive position,
- 20 d: the same as c, but with the ratchet arm in the active position for retaining the conduit, and
- e: a further fixing device mounted on top of the first fixing device secured to the cableway, the attaching members of the second fixing device being brought into engagement with the holes on each side of the mouth of the clamp opening.
- 25

Figure 8 shows a side wall element of the jaw of the clamp.

- 30 Figure 9 illustrates a second design of said side wall element comprising the locking member for the ratchet arm, said locking member constituting a portion punched out of the side wall element which, in the mounted position, projects into the jaw/housing.

- 35 Figure 10 shows an alternative design of the clamp of the fixing device in perspective where the jaw comprises two jaw

portions which are rotatable in relation to one another so that on rotating said jaw portions relative to one another, the distance between the attaching members is altered.

5 Figure 11 shows the fixing device seen from the side.

Figures 12 a - d show the fixing device seen from the side in section and where

10 a shows the jaw portions rotated apart from one another for the insertion of attaching members in apertures in the underlying support structure,

b shows said jaw portions rotated into the operative position with the attaching members in engagement with apertures in the underlying support structure,

15 c illustrates the fixing device in the operative position with the conduit of the largest dimension that can be used with the fixing device held in place, and

d shows the same but with a conduit of the smallest dimension that can be retained in the fixing device.

20

Figure 13 illustrates a fixing device in perspective as in figure 10, but here the clamps of the fixing device have inwardly hook-shaped attaching members in contrast to the outwardly hook-shaped attaching members in figure 10.

25

Figures 14a - c are side views of the fixing device according to figure 13 in section and where

30 a shows the jaw portions rotated away from one another for the insertion of the attaching members of the fixing device into apertures in the underlying support structure,

b shows the same with the jaw portions rotated into the operative position and with the attaching members in engagement with the edges of the apertures, and

35 c shows the same as b, but with the ratchet arm in engagement with the appurtenant locking member,

Figures 15a - c illustrate details on a larger scale of the

clamping members with which the jaw portions are provided in order to hold these in the operative position after on the underlying support structure, and

5 figures 16a and b show two fixing devices mounted one on top of the other with the lowermost fixing device mounted on an underlying support structure, and enlarged details of the clamping members with which the two jaw portions of the fixing device are provided.

10 Figure 1 shows, as stated above, the fixing device, hereafter in the specification referred to as the clamp, in perspective and comprising a jaw 1 in the form of a housing with two side walls 1b, 1c which face one another and two walls having a clamp
15 opening 1a which in figure 1 are shown in the form of a front wall 1e and a back wall 1d, said walls together forming a housing which in said figure is open in the upwards and downwards direction.

20 The jaw 1, at its lowermost part in the drawing, is provided with attaching members 6, 7 for interaction with complementary attaching members in the underlying support structure, such as elongate apertures 13 in a cableway/cable riser 14.

25 The attaching members 6, 7 will be discussed in more detail hereinbelow.

A closure means 2, 3 comprises a ratchet arm 3 pivotally mounted at one end 3a to one of the sides of the clamp opening 1a near
30 its mouth. The second end/engaging end 3b of the ratchet arm 3 is designed for snap engagement with a locking member 2 of complementary configuration at the opposite side of the clamp opening 1a for pressing a conduit R into the clamp opening 1a and retaining it therein (see figures 6 and 7).

35 The locking member 2 is arranged so as to be resiliently tensioned in the direction of the clamp opening 1a for

resilient abutment against the engaging end 3b of the ratchet arm 3 when in its inwardly pivoted active position, as shown in figures 6 and 7d and e.

5 The locking member 2 and the engaging end 3b of the ratchet arm 3, in the illustrated embodiment, are designed with a plurality of projections/teeth 2a, 3c for engagement with one another in the desired position, dependent upon the outer dimension of the conduit R, as is shown clearly in figures 2 and 6.

10 To guide the locking member 2 in its resilient movement towards the engaging end 3b of the ratchet arm 3, the locking member 2, which in the present embodiment and as shown in figure 4, has the form of a curved body having teeth 2a on its concave
15 side, is equipped with two parallel, elongate guiding traces 2b, spaced apart from one another in the side surfaces of the locking member 2, which are through-going and are designed to interact with two guiding pins 8 secured in the front wall 1e and the back wall 1d of the jaw 1. The guiding pins 8 and the
20 guiding traces 2b are positioned and oriented in such a way that by means of a locking spring 4 in the form of a bent laminated spring attached to one side wall 1c and the jaw 1 and to the locking member, respectively, said locking member can be moved/pressed in the direction towards the engaging end 3b
25 of the ratchet arm 3 in its inwardly pivoted closure position (see figures 4, 5 and 6).

The aforementioned attaching members 6, 7 of the conduit jaw are arranged on the side 1b of the jaw 1 opposite the mouth of the
30 clamp opening 1a and comprise projecting hooks 6, 7 with hook openings 6a, 7a facing either towards and or away from one another for engagement with complementary attaching members in the underlying support structure, for example edges in elongate apertures 13 in the cableway/ cable riser 14, as shown in
35 figures 6 and 7.

When said hook openings 6a, 7a face away from one another and

are secured either end of the side of the jaw 1 opposite the mouth of the clamp opening 1a, ie, in the drawing the lowermost open side edge of the jaw 1, the hooks 6,7 of the clamp can be thrust down into the elongate apertures 13 in the cableway with the clamp slightly askew in relation to said apertures 13, whereafter the clamp can be rotated into a position at right angles to said elongate apertures 13 so that the hooks 6,7 engage with the underside of the edges of the aperture 13.

A more expedient design is however shown in the drawing, wherein one hook 6 is provided so as to be resiliently movable so that the clamp can be both mounted onto and dismounted from the attaching members in the underlying support structure, such as said elongate apertures 13.

Such resilient mobility of the hook 6 is obtained in that the hook 6 with a stem 5 consisting of spring steel is secured by the end facing away from the hook 6 to the inside of one of the side walls 1b of the jaw 1.

Providing that the hook 6 with the stem 5 lies resiliently in abutment against the inside of said side wall 1b, the clamp can be mounted in said elongate apertures 13 in that the resilient hook 6 is inserted into the elongate slot 13, whereafter the clamp is displaced with the stem 5 of the hook towards the edge of the slot, whereupon the hook 7 at the other end of the clamp is inserted into a parallel slot 13 and in under the edge thereof whilst the resilient hook 6 springs back into position.

When using this method of attachment, the clamp can, however, be released unintentionally in that force is exerted upon the clamp which displaces it towards the spring tension of the hook 6 in such a way that the fixed hook 7 can be forced up out of the aperture 13. In order to prevent this, the clamp is equipped with a lock 10 for the hook 6, comprising an eccentric member 11 with operating arm 12, mounted on the jaw 1. The

eccentric member 11 can be turned by means of operating arm 12 from the passive position where the hook 6 with stem 5 lies in the withdrawn position as shown in figure 5. This will happen provided that the stem 5 of the hook 6 is bent away from the inside of the side wall 1b of the jaw 1.

By pivoting the operating arm 12 downwards, the eccentric member 11 is rotated and presses the stem 5 of the hook 6 in towards the the inside of the side wall 1b, whereupon the hook 6 is swung outwards and into engagement under the side edge of the aperture 13. Thus the clamp will not be capable of being moved sideways by the pressure of any force and will be securely held against the support structure.

The mounting of the clamp on the cableway and the positioning of the conduit in said clamp is clearly shown in figures 7a, b, c, d and e. The clamp is secured by means of the hooks 6,7 in the aforementioned elongate apertures 13 in the cableway/cable riser 14, whereupon the operating arm 12 is pivoted downwards so that the movable hook 6 is displaced in under the edge of the aperture 13, whereby the clamp is securely fixed to the cableway as shown in b. The conduit R is placed thereafter in the opening of the clamp 1a as shown in c and the ratchet arm 3 is pivoted downwards so that its engaging end 3b, that is provided with teeth 3c, enters into engagement with the locking member 2, as is shown in d. The clamp can receive and retain the conduit R of varying dimensions in that the ratchet arm 3 is depressed to a lesser or greater extent, depending upon the dimensions of the conduit, into engagement with the locking member 2, as is shown in figure 6.

As shown in figure 7e, an additional clamp can be placed on top of the clamp that is secured to the cableway 14. The same attaching members 6,7 are used here in interaction with holes 9 in each of oppositely positioned side walls 1b,1c of the jaw.

The jaw 1 can be made for instance in that a blank is punched out which comprises the front wall 1e, the back wall 1d with the intermediate side wall 1b. Said blank is bent upwards so that said front wall, back wall and one side wall are formed. The second side wall 1c can be produced separately, as shown in figure 8, and affixed in the open side edge of the upwardly bent blank in a known way, per se. Said side wall element 1c is, as shown in figure 8, equipped with said hook 6 at its lowermost end and with said hole 9 at its uppermost end.

Instead of making the jaw 1 as a housing with a front wall, a back wall 1e, 1d and two side walls 1b, 1c, the jaw can consist of a plate (not shown) having a clamp opening 1a and with the aforementioned elements such as the ratchet arm 3 and the locking member 2 positioned on the plate. The same applies also to the attaching members 6, 7 for securing the clamp to the support structure.

Instead of a resilient locking member 2, the engaging portion of the ratchet arm 3 can be arranged resiliently so that on pivoting down towards the fixed locking member 2, the engaging end 3b will give way to, for example, a telescopic device on the ratchet arm 3 such that the engaging end 3b is pressed to abutment against the locking member 2 having teeth 2a.

An alternative embodiment of the locking member 2 may be that it is made of a punched-out portion of one side wall 1c of the jaw 1, as is shown in figure 9. The punched-out portion here has been pivoted inwards in the jaw or the housing formed thereby in order to interact with the ratchet arm 3. The desired resilience arises in that the locking member 2 acts as a resilient arm attached to said side wall 1c. The parts are preferably made of stainless steel thereby also having resilient properties.

In an alternative embodiment of the clamp as shown in figures 10 to 16, the two oppositely positioned side parts of the clamp

opening 1a are made of two jaw portions 1', 1'' that are rotatable relative to one another with the point of rotation A at the lower edge of the clamp opening 1a. This means that the jaw 1 consists of two jaw portions 1', 1'' that are rotatable relative to one another. On relative rotation of the jaw portions 1', 1'', the distance between the attaching members 6,7 is altered such that these can be inserted into the apertures 13 in the cableway/cable riser 14 in order thereafter to cause engagement between the hook-shaped attaching members 6,7 and the edges of the aperture 3 by rotating the jaw portions 1', 1'' back into the operative position. The jaw portions 1', 1'' can be retained in said operative position by means of the clamping members of the clamp, viz, the ratchet arm 3 and the locking member 2 which, when in engagement with one another, press the jaw portions 1', 1'' towards and away from one another, respectively, in order to hold the hook-shaped attaching members 6,7 in engagement with the edges of the apertures 13.

As shown in figures 10, 11 and 12, the hook openings 6a,7a of the hook-shaped attaching members 6,7 face away from one another.

In this case, the jaw portions 1', 1'' will be rotated apart from one another to reduce the distance between the attaching members 6,7 for insertion into the apertures 13. Thereafter the jaw portions 1', 1'' are rotated once more towards one another whereby the hook openings of the attaching members 6,7 are brought to abutment and engagement with the edges of the apertures 13.

In another embodiment of the attaching members 6,7, the hook openings thereof can face towards one another as is shown in figures 13 and 14. On mounting the clamp on the support structure, the jaw portions 1', 1'' must be rotated towards one another in order to increase the distance between the attaching members 6,7, whereupon these are inserted into the apertures

13, whereafter the jaw portions 1', 1'' are rotated back to the operative position whereby the hook openings 6a,7a of the attaching members 6,7 are brought into engagement with the side edges of the apertures 13.

5 Here, the jaw portions 1', 1'' can also be held in the operative position by means of the ratchet arm 3 and the locking member 2 in that the ratchet arm 3 is brought into engagement with the locking member 2 and presses the jaw
10 portions 1', 1'' apart from one another.

As shown in figures 12 and 14, respectively, and also in figure 16, the clamping members are made of complementary closure members 15,16 provided on each jaw portion 1', 1''.

15 The complementary closure members 15,16 can, as shown in said figures, be made of a projection/tongue 15 on the first jaw portion 1' and an indentation/aperture 16 on the second jaw portion 1'', or vice versa.

20 Thus, in figure 12, the tongue 15 of the closure member is made of a resilient projection/laminate spring attached to the side wall of the jaw portion 1' and which in the closed position engages with an indentation 16 in the second jaw portion 1''.
25 Said indentation is positioned on the end of the jaw portion 1'' which extends from the point of rotation A towards the side edge of the first jaw portion 1'. Thus, the jaw portions 1', 1'' are prevented from rotating back and becoming disengaged from the apertures 13.

30 An alternative embodiment of the closure members 15,16 is shown in figure 14 and in more detail in figure 15. The projection/tongue 15 of the closure member is here positioned on the side wall of the jaw portion 1' and projects inwards in
35 order to interact with an indentation/aperture 16 on the second jaw portion 1''. Said indentation/aperture 16 is placed in the same area as mentioned above in connection with the embodiment

in figure 12.

As shown in the enlarged detailed drawings in figures 15a, b and c, the part of the jaw portion 1'' near the indentation/aperture 16 is furnished with a pocket 17 with an upwardly facing opening designed for the insertion of, for example, a screw driver 18. By turning the screw driver, the side wall of the jaw portion 1'' is pressed so that the indentation/aperture 16 disengages from the tongue 15 of the projection/tongue 15 of the first jaw portion 1', whereby the jaw portions 1', 1'' can rotate freely relative to one another, thereby causing the attaching members 6,7 of the clamp to disengage from the edges of the apertures 13 when dismounting the clamp.

In the alternative embodiment of the clamp according to figures 10, 11, 12, 13, 14 and 15, the locking member 2 in the jaw portion 1'' is made of two parallel arcuate rows of teeth 2a' spaced relative to one another, each affixed to one of the facing side walls of the jaw portion 1'' for engagement with the engaging end 3b of the ratchet arm 3.

Rotation of the jaw portions 1', 1'' towards one another is achieved in that the engaging end 3b of the ratchet arm 3 projects in through the slot 2b formed by the rows of teeth 2a' for resilient engagement by means of the engaging members 3d provided on the engaging end with the back of the toothed rows 2a, ie, the sides which face away from the clamp opening 1a. The retention of the attaching members 6,7 in the cableway/cable riser 14 is thereby achieved at the same time as conduit R is held in the clamp as shown in figures 12c and d, in particular. In this case the clamping members 15,16 may therefore be omitted.

The teeth in said rows of teeth 2a' can be provided in that the side walls of the jaw portion 1'' are made of plates having a number of projections that are bent inwards at an angle to the

plate whereby said two rows of teeth 2a' are produced having an intermediate slot 2b.

5 The resilient engagement of the ratchet arm 3 with the rows of teeth 2a' can be achieved, for example, in that the ratchet arm 3 is made of a resilient material which brings the engaging members 3d of the engaging end 3b into pressured abutment against said back of the rows of teeth 2a. Optionally, the engaging member itself 3d can be made of a resilient material
10 in order to achieve the above described effect.

The jaw 1, the jaw halves 1', 1'', respectively, have at their side edges on each side of the mouth of the clamp opening 1a a hole 9 for interaction with the aforementioned hook-shaped
15 attaching members 6,7 on a corresponding clamp, for mounting clamps one on top of another, as shown in figure 16. Mounting the clamp in the hole 9 of the underlying clamp happens in the same way as described hereinabove in connection with both clamps having a non-divided jaw 1 and clamps wherein the jaw
20 1 comprises two jaw portions 1', 1'', rotatable relative to one another.

As also shown in the drawing, and particularly clearly in figure 16, the point of rotation A of the jaw portions 1', 1'' is laterally displaced from the bisecting plane B of the
25 clamp opening 1a, see figure 11, and inwards above one of the jaw portions 1', 1''. Said point of rotation A is preferably displaced inwards above jaw component 1' with ratchet arm 3.

30

35



P a t e n t c l a i m s

1.

5 A fixing device for securing elongate articles such as conduits to a support structure, especially to cableways/cable risers, consisting of a clamp comprising a clamp opening (1a) provided with a U-shaped jaw (1) having attaching members (6,7) for interaction with complementary attaching members in the support
10 structure, a closure means comprising a closure arm pivotally mounted at the mouth of the clamp opening (1a) for the retention of conduits placed in the clamp opening (1a), characterized in that the closure arm is formed by a ratchet arm (3) pivotally mounted by one of its ends (3a) at one side
15 of the clamp opening (1a) near the mouth thereof, and the second free end of which forms an engaging end (3b), and is designed for snap engagement with a locking member (2) of complementary configuration at the opposite side of the clamp opening (1a) for pressing the conduit into the clamp opening
20 (1a) and retaining it therein, and that the attaching members (6,7) are provided on the side of the jaw (1) opposite the mouth of the clamp opening (1a) and comprise projecting hooks (6,7) with hook openings (6a,7a), facing either towards or away from each other, for engagement with said complementary
25 attaching members in the support structure, eg, edges of the apertures (13) in the cableway/cable riser (14).

2.

30 A fixing device according to claim 1, characterized in that the locking member (2) is arranged so as to be resiliently tensioned in the direction of the clamp opening (1a) for resilient abutment against the engaging end (3b) of the ratchet arm (3) in the pivoted, active position thereof.

35

This Sheet Has Been Replaced





3.

A fixing device according to claim 1, characterized in that the engaging end (3b) of the ratchet arm (3) is positioned for resilient abutment against the locking member (2).

4.

A fixing device according to claim 2 and/or claim 3, characterized in that the locking member (2) and/or the engaging end (3b) are made with one or more projections/teeth (2a, 3c) for engagement with one another in a desired position which is dependent upon the outer dimension of the conduit.

5.

A fixing device according to claim 2, characterized in that the locking member (2) is resiliently connected to the jaw (1) at one side of the clamp opening (1a) for resilient pivoting of the locking member (2) in towards the clamp opening (1a).


6.

A fixing device according to claim 2, characterized in that the locking member (2) has two parallel elongate guiding traces (2b) spaced apart for interaction with two guiding pins (8) secured to the jaw (1), said guiding pins (8) and guiding traces (2b) being positioned and oriented in such a way that by means of a locking spring (4) in the form of a bent laminate spring which is fastened to one side wall (1c) of the jaw (1), the locking member (2) can be moved/forced in the direction of the engaging end (3b) of the ratchet arm (3) when pivoted into its closure position (see figures 4, 5 and 6).

7.

A fixing device according to claim 1, characterized in that one hook (6) is arranged so as to be resiliently movable for both

This Sheet Has Been Replaced





mounting and dismounting the clamp from said attaching members in the support structure.

8.

5 A fixing device according to claim 7, characterized by a lock (10) for the hook (6) comprising an eccentric body (11) having a operating arm (12) mounted on the jaw (1) and in abutment against the stem (5) of the hook (6) which is resilient and secured to the jaw (1), in order to force the hook (6), by
10 turning the eccentric body (11), in the outwards direction to engagement with said attaching member in the support structure (14), or optionally holes (9) in the jaw (1).

15 9.

A fixing device according to any one of the preceding claims 1 to 6, characterized in that the two oppositely positioned sides of the clamp opening (1a) are made by two jaw portions (1',1'') rotatable relative to one another with the point of
20 rotation (A) at the lower edge of the clamp opening (1a), so that by relative rotation of the jaw portions (1',1''), the distance between the attaching members (6,7) is altered for insertion into complementary attaching members (13) in the support structure, eg, apertures (13) in a cableway/cable riser
25 (14), and thereafter by rotating the jaw portions (1',1'') back to the operative position to bring the attaching members (6,7) into engagement with the edges of the apertures (13), and clamping members for retaining said operative position.

30

10.

A fixing device according to claim 9, characterized in that the clamping members comprise the ratchet arm (3) and the locking member (2) of the jaw (1).

35

This Sheet Has Been Replaced



11.

A fixing device according to claim 9, characterized in that the clamping members are formed by the complementary closure members (15,16) arranged on each jaw portion (1',1'').

5

12.

A fixing device according to claim 11, characterized in that the complementary closure members (15,16) are formed by a projection/tongue (15) on the first jaw portion (1') and an indentation/aperture (16) on the second jaw portion (1''), or vice versa.

15 13.

A fixing device according to any one of the preceding claims 1, 3, 4, 7, 8, 9, 10, 11 and/or 12, characterized in that the locking member (2) is formed by two parallel, arcuate rows of teeth (2a') spaced apart, each one affixed to one of the two oppositely positioned side walls of the jaw (1)/jaw portion (1'') for engagement with the engaging end (3b) of the ratchet arm (3).

25 14.

A fixing device according to claim 13, characterized in that the engaging end (3b) of the ratchet arm (3) projects in through the slot (2b) formed between the rows of teeth (2a') for resilient engagement by means of the engaging bodies (3d) positioned on the engaging end with the back of said rows of teeth (2a'), ie, the sides that face away from the clamp opening (1a).

35 15.

A fixing device according to claim 7, characterized in that the jaw (1) has, at each of its side edges on each side of the





18

mouth of the clamp opening (1a), a hole (9) for interaction with said hooks (6,7) on a corresponding clamp for mounting clamps one on top of another.

5

16.

A fixing device according to claim 9, characterized in that the point of rotation (A) is laterally displaced from the bisectonal plane (B) of the clamp opening (1a) and inwards
10 above one of the jaw portions (1',1''), preferably the jaw portion (1') having the ratchet arm (3).

15

20

This Sheet Has Been Replaced



25

30

35

FIG. 1

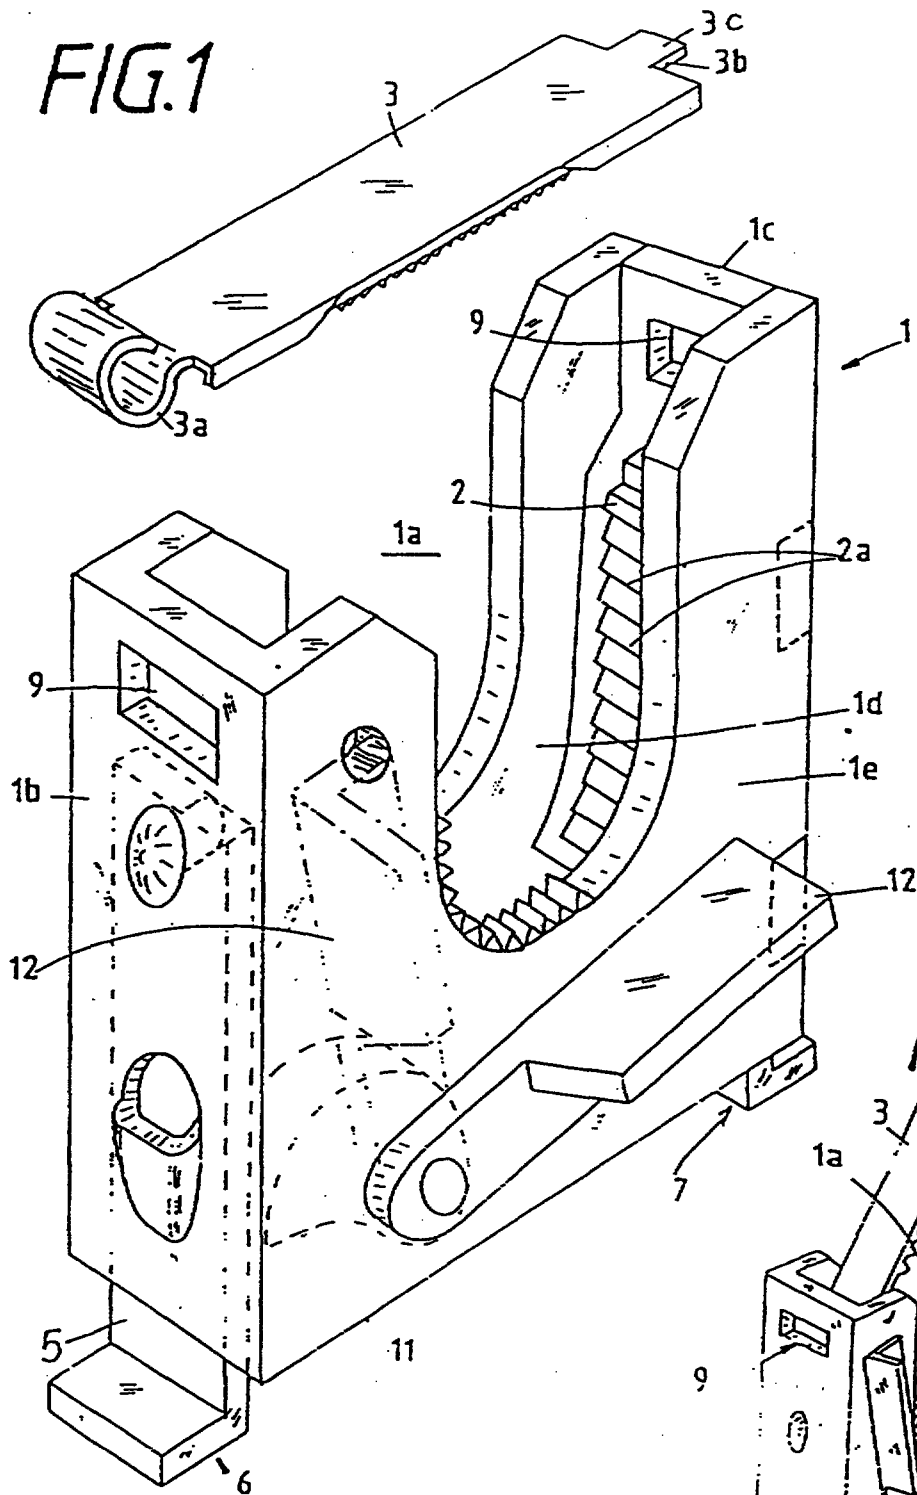


FIG. 2

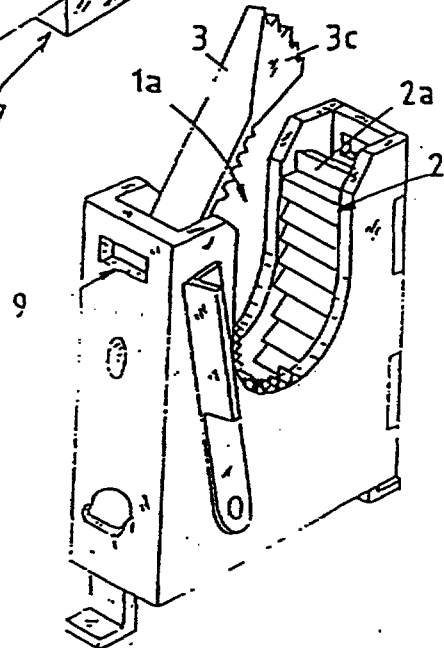


FIG.3

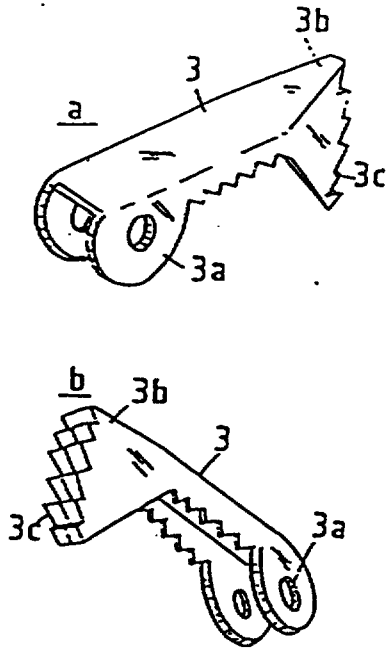


FIG.4

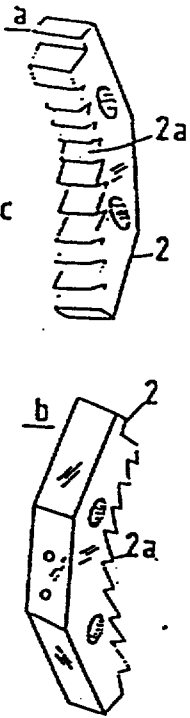


FIG.6

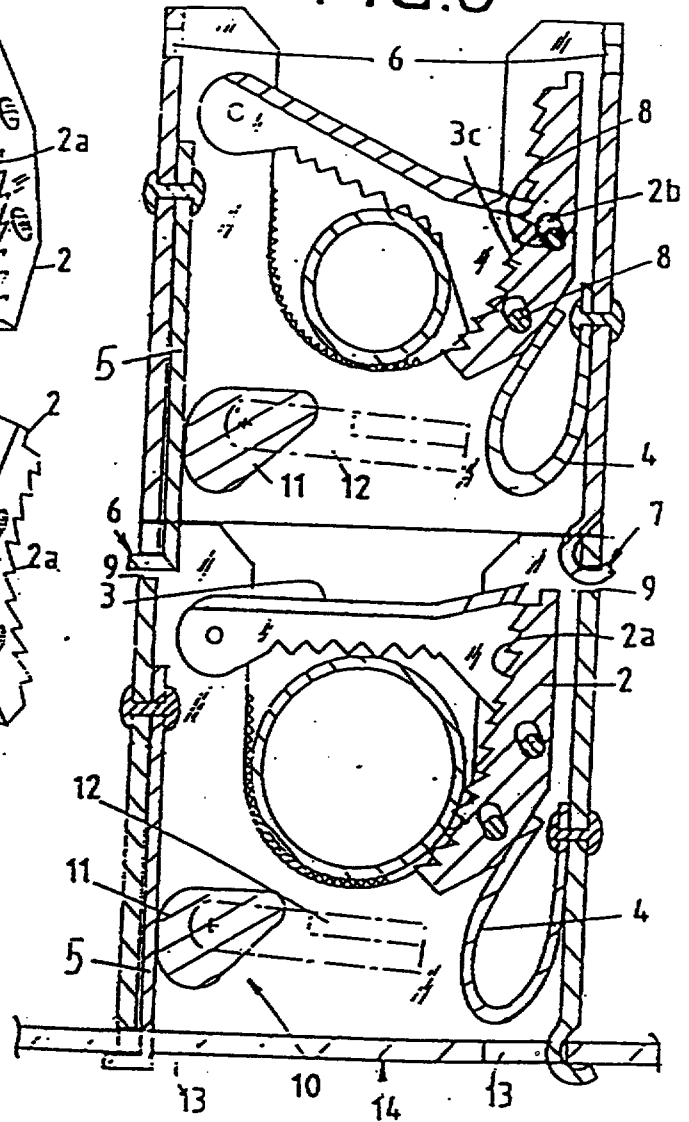


FIG.5

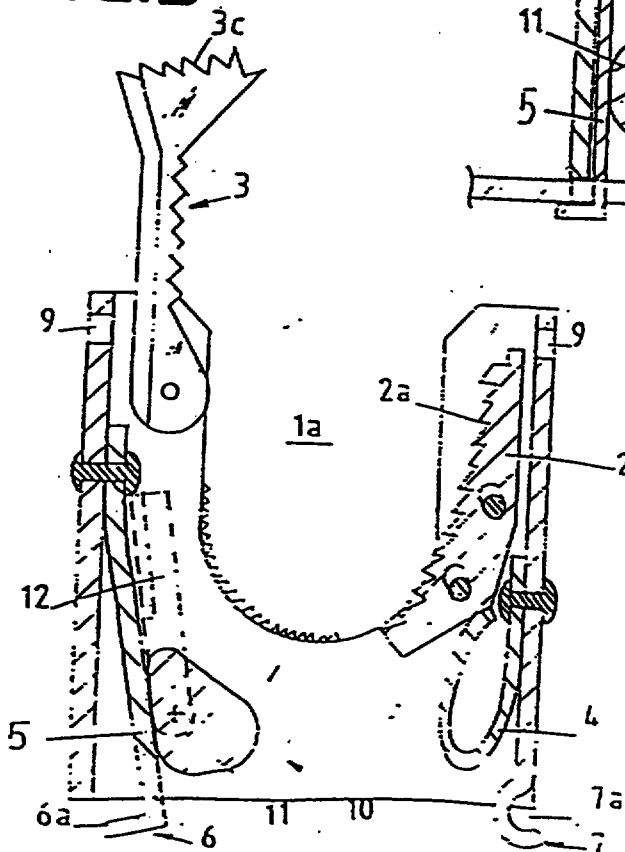


FIG. 7

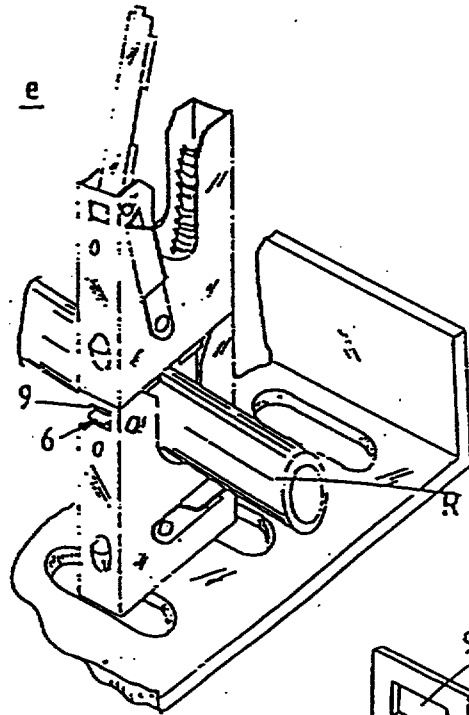
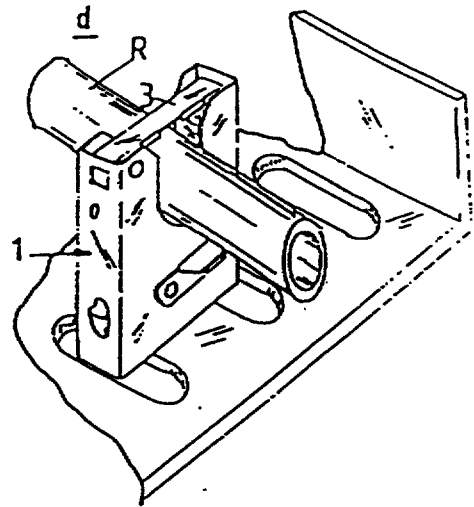
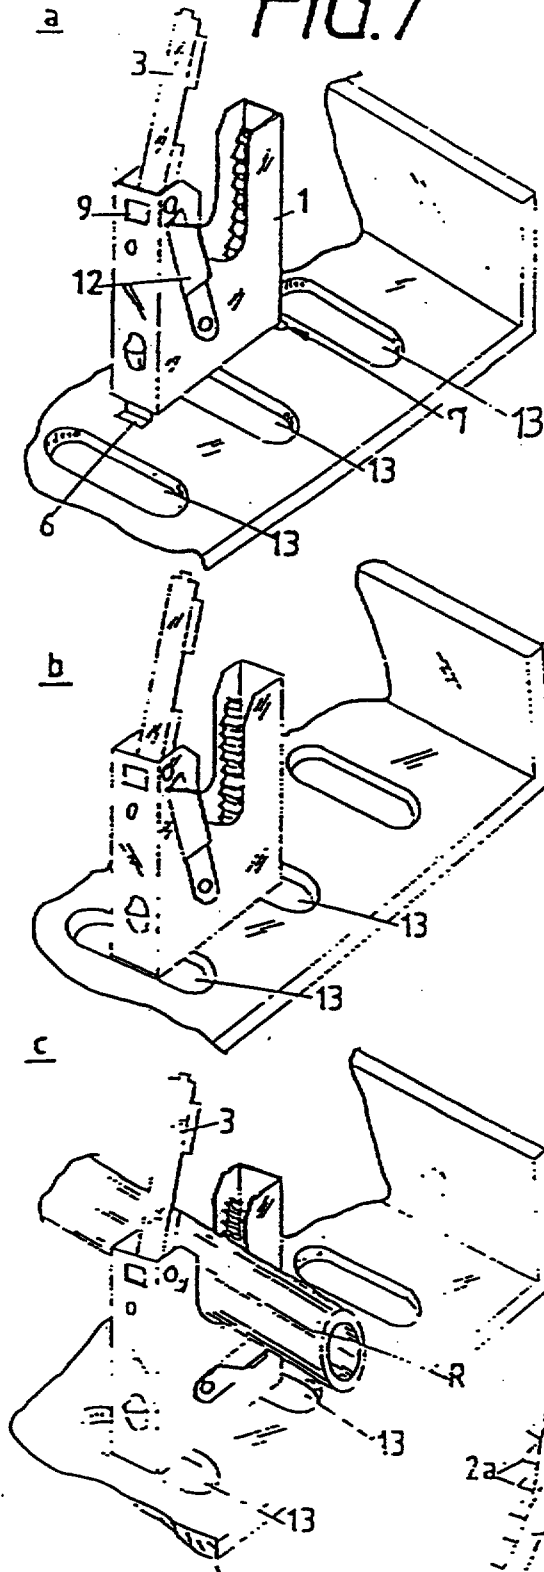


FIG. 9

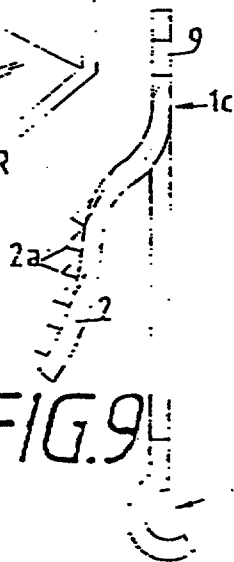


FIG. 8

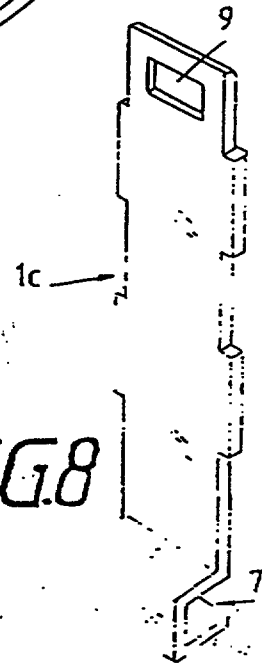


FIG. 10

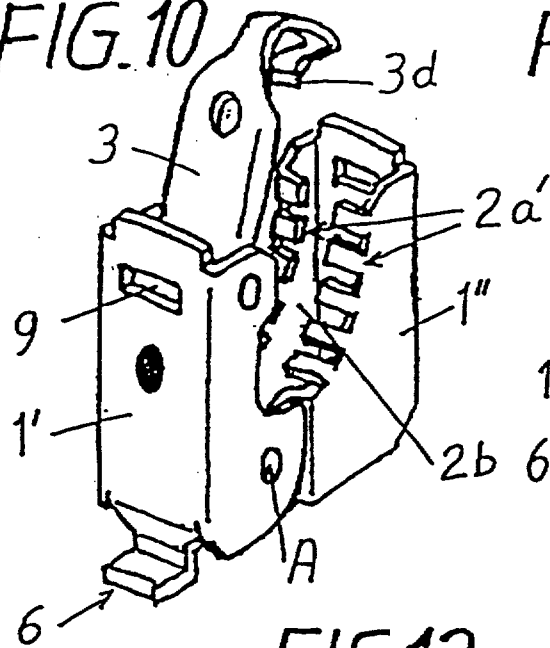


FIG. 11

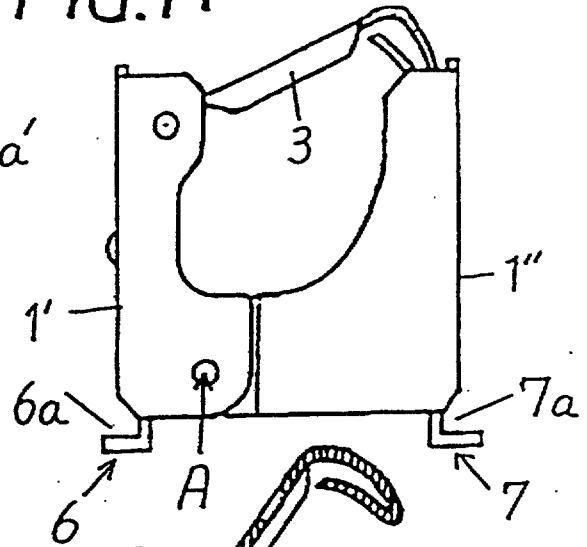


FIG. 12

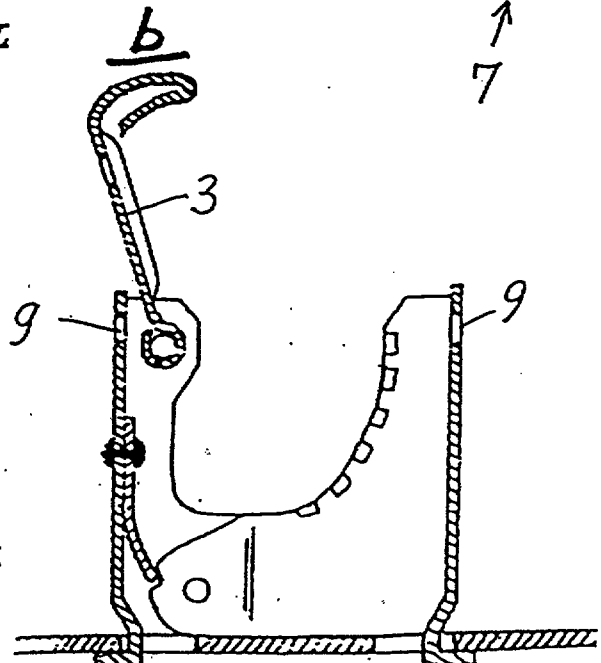
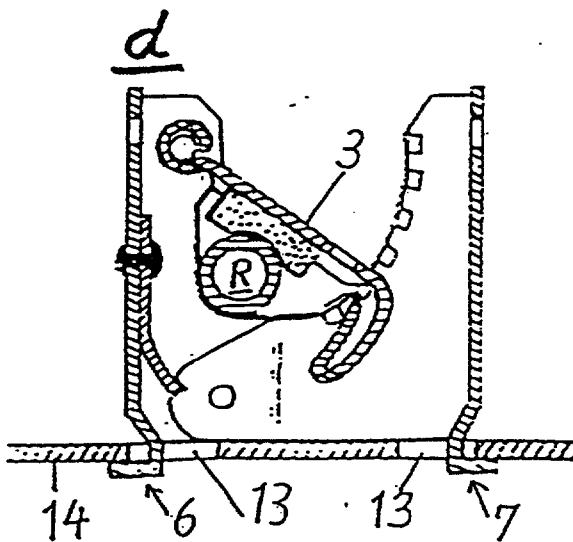
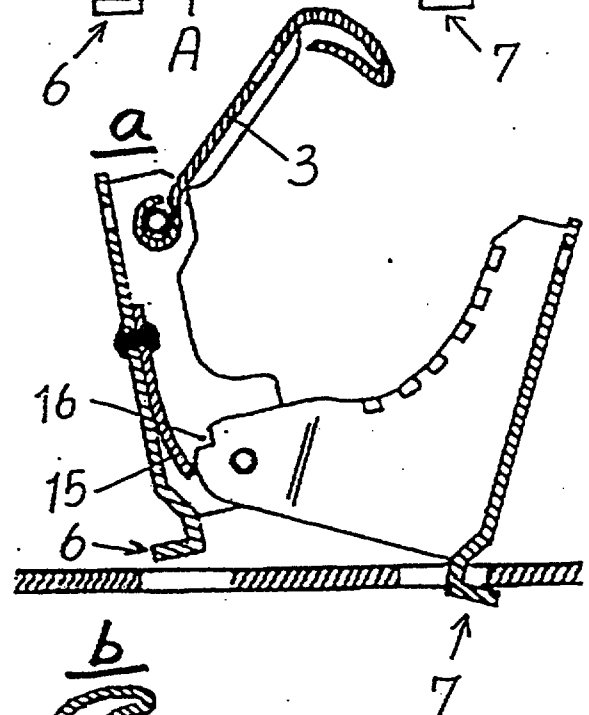
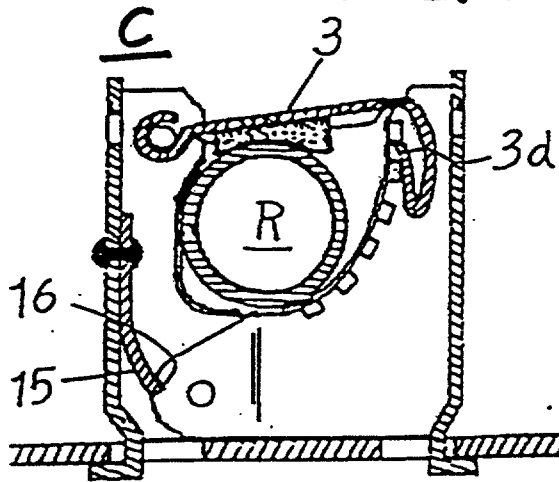


FIG.13

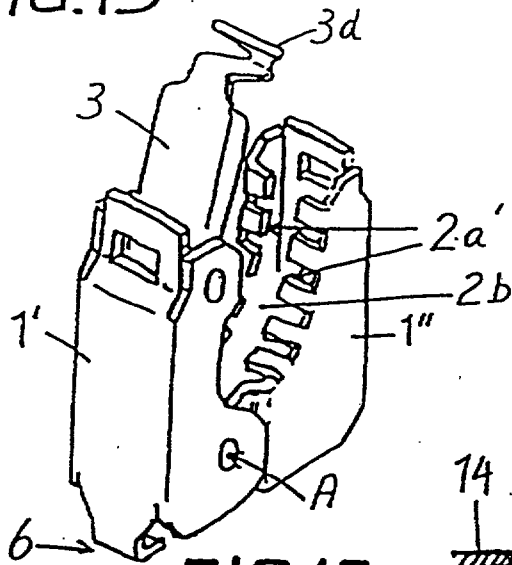


FIG.14

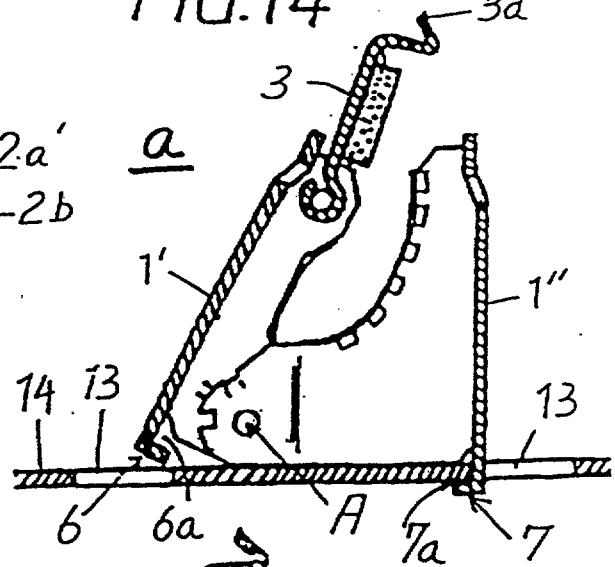


FIG.15




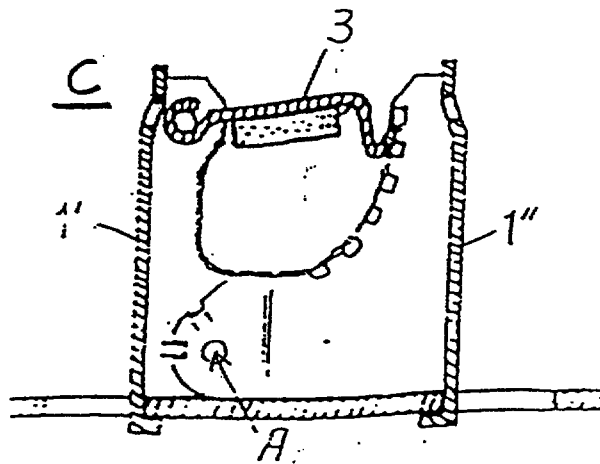


FIG. 16

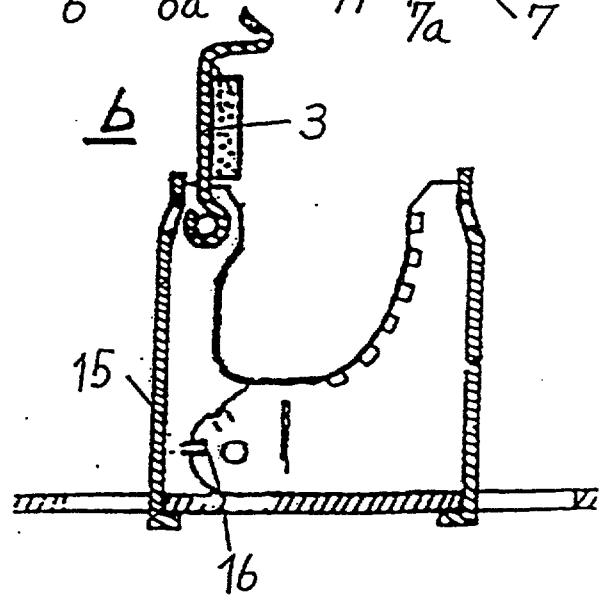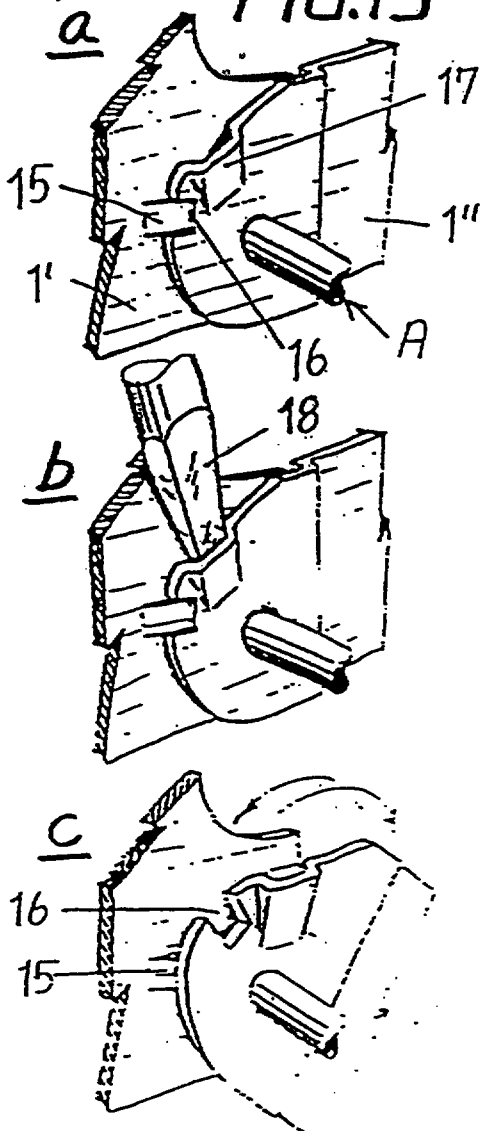

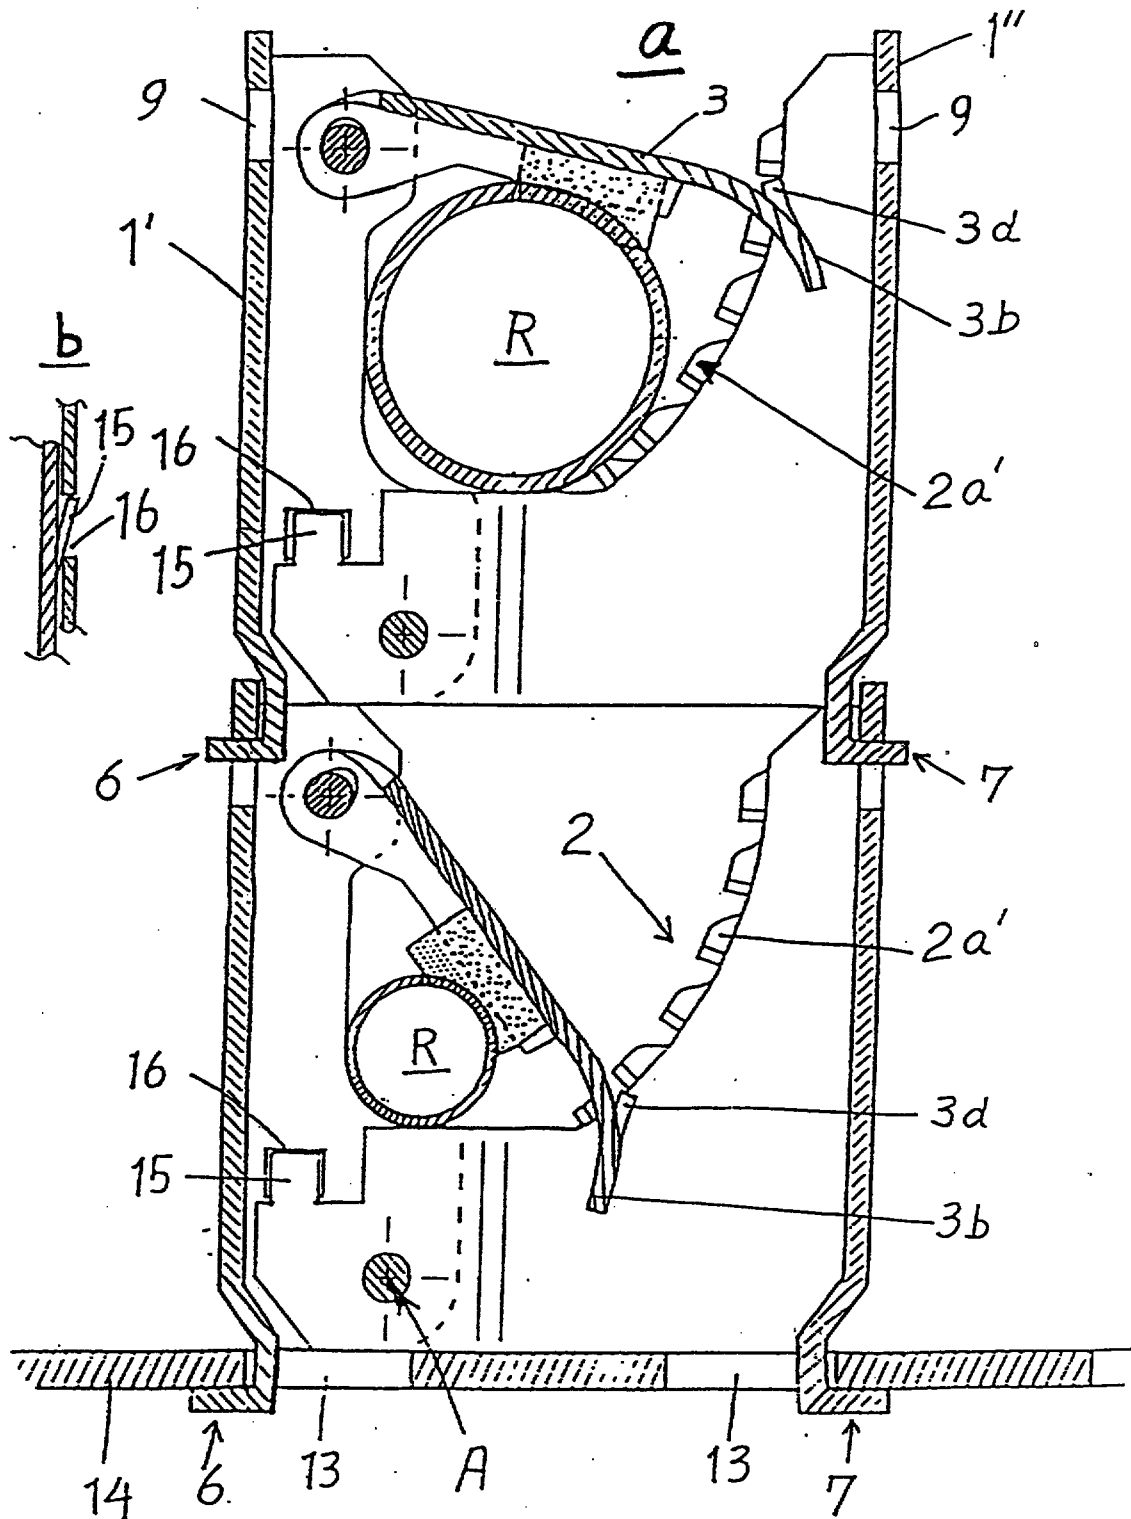

14

CLAIMS

REPLACEMENT SHEETS SG
☐ Description : paged to paged
☒ Claim(s) : paged 14 to paged 14.
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged
PAGE OF RECEIPT 6/5/99

1.


A fixing device for securing elongate articles such as conduits to a support structure, in particular to cableways/cable risers, by means of attaching members (6, 7), said fixing device includes a clamp means in form of a U-shaped jaw (1; 1', 1'') and a ratchet arm (3) pivotably supported at one end (3a) thereof to the jaw (1; 1', 1'') and together form a clamp opening (1a) able to receive different article dimensions, whereby the free end of said ratchet arm (3) is designed for snap engagement with at least one of several complementary configured locking means (2) arranged on said jaw (1; 1', 1'') for retaining of said article in the clamp opening (1a), characterized in that said attaching members (6, 7) are movable and setable for interaction with complementary attaching means on said support structure, said attaching members (6, 7) being restricted in disconnection as long as at least one article is received in said clamp opening (1a).

20 2.

A fixing device according to claim 1, characterized in that said attaching member (6, 7) is a projecting hook arranged in one side face of the jaw, having hook openings (6a, 7a) facing either toward or away from each other for interaction with said complementary attaching means, such as edges of apertures (13) in support structures.

3.

A fixing device according to claim 1 or 2, characterized in that the locking means (2) is arranged so as to be resiliently tensioned in the direction of the clamp opening (1a) for resilient abutment against the engaging end (3b) of the ratchet arm (3) in the pivoted, active position thereof.

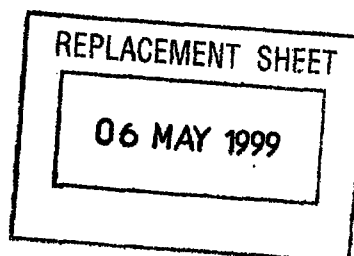



4.

A fixing device according to claim 1 or 2, characterized in that the engaging end (3b) of the ratchet arm (3) is positioned for resilient abutment against the locking means (2).

5.

A fixing device according to claim 3 and/or claim 4, characterized in that the locking means (2) and/or the engaging end (3b) are made with one or more projections/teeth (2a, 3c) for engagement with one another in a desired position which is dependent upon the outer dimension of the article.

6.


A fixing device according to claim 3, characterized in that the locking means (2) is resiliently connected to the jaw (1) at one side of the clamp opening (1a) for resilient pivoting of the locking means (2) in towards the clamp opening (1a).

7.

A fixing device according to claim 3, characterized in that the locking means (2) has two parallel elongate guiding traces (2b) spaced apart for interaction with two guiding pins (8) secured to the jaw (1), said guiding pins (8) and guiding traces (2b) being positioned and oriented in such a way that by means of a locking spring (4) in the form of a bent laminate spring which is fastened to one side wall (1c) of the jaw (1), the locking means (2) can be moved/forced in the direction of the engaging end (3b) of the ratchet arm (3) when pivoted into its closure position (see figures 4, 5 and 6).

8.

A fixing device according to claim 2, characterized in that one hook (6) is arranged resiliently movable for both

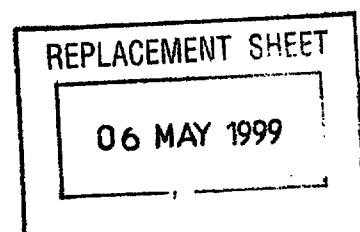



mounting and dismounting the clamp from said attaching members in the support structure.

9.


A fixing device according to claim 8, characterized by a
5 lock (10) for the hook (6) comprising an eccentric body (11)
having an operating arm (12) mounted on the jaw (1) and in
abutment against the stem (5) of the hook (6) which is
resilient and secured to the jaw (1), in order to force the
hook (6), by turning the eccentric body (11), in the
10 outwards direction to engagement with said attaching member
in the support structure (14), or optionally holes (9) in
the jaw (1).

10.

A fixing device according to claim 1 or 2, characterized in
15 that the two oppositely positioned sides of the clamp
opening (1a) comprises two jaw portions (1', 1'') pivotable
relative to one another with the axis of rotation (A) at the
lower edge of the clamp opening (1a), so that by relative
rotation of the jaw portions (1', 1''), the distance between
20 the attaching members (6, 7) is altered for insertion into
complementary attaching members (13) in the support
structure, and thereafter by rotating the jaw portions (1',
1'') back to the operative position to bring the attaching
members (6, 7) into engagement with the edges of the
25 apertures (13), and clamping members for maintaining said
operative position, said ratchet arm, on locking, in
addition provides setting of the attaching members (6, 7) in
the complementary attaching members or apertures (13) in the
support structure (Fig. 10-16).

30 11.

A fixing device according to claim 10, characterized in that
the clamping members comprise the ratchet arm (3) and the
locking means (2) of the jaw (1).

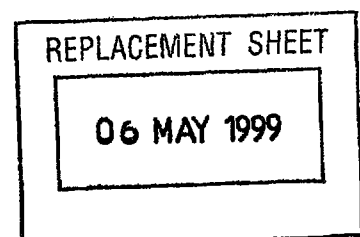



12.

A fixing device according to claim 10, characterized in that the clamping members are formed by complementary closure members (15, 16) arranged on each jaw portion (1', 1'').

5 13.

A fixing device according to claim 12, characterized in that the complementary closure members (15, 16) are formed by a projection/tongue (15) on the first jaw portion (1') and an indentation/aperture (16) on the second jaw portion (1''), or
10 vice versa.

14.

A fixing device according to any one of the preceding claims 1, 2, 10, 11, 12 and/or 13, characterized in that the locking means (2) is formed by two parallel, arcuate rows of
15 teeth (2a') spaced apart, each one affixed to one of the two oppositely positioned side walls of the jaw (1)/jaw portion (1'') for engagement with the engaging end (3b) of the ratchet arm (3).

15.

20 A fixing device according to claim 14, characterized in that the engaging end (3b) of the ratchet arm (3) projects in through the slot (2b) formed between the rows of teeth (2a') for resilient engagement by means of engaging means (3d) positioned on the engaging end with the back of said rows of
25 teeth (2a'), ie, the sides that face away from the clamp opening (1a).

16.

A fixing device according to claim 2-15, characterized in that the jaw (1; 1', 1'') has, at each of its side edges on
30 each side of the mouth of the clamp opening (1a), a hole (9) for interaction with said hooks (6, 7) on a corresponding fixing device for mounting one on top of another.



17.

A fixing device according to claim 10-16, characterized in that the axis of rotation (A) is located on the same side of the bisectonal plane (B) of the clamp opening (1a) and
5 inwardly and above one of the jaw portions (1', 1''), preferably the jaw portion (1') having the ratchet arm (3).

