

REPLACED SHEETS	SG
☒ Description : paged ...1... to paged ...7.....	
☒ Claim(s) : paged ...8... to paged ...9.....	
☒ Drawing(s) : paged ...1/2... to paged ...3/4.....	
☒ Abstract : paged ...1/2... to paged ...-.....	
DATE OF RECEIPT	

- 1 -

PACKING

The present invention relates to a packing.

Packings are widely employed in mechanisms when it is a matter of sealing off an apparatus from dust or water for example. In precision mechanisms or micromechanisms, such packings are currently called O-ring seals or indeed toroidal seals in view of their annular form and their generally round cross-section.

An example drawn from horology will make readily understandable to what end the object of the present invention may be employed, such object being readily usable in many other known domains as for instance that of photography (zoom lenses) or equipment in general.

In its first embodiment the invention described in patent document CH-A-432 388 has as object a watch case comprising two elements which may be oriented in any desired manner relative to one another, one comprising a first annular element bearing a glass and the other a second annular element on which the first is rotatively mounted, a packing being inserted between these two elements.

Figure 1 of the present invention shows such prior art, somewhat modified relative to the cited document, but however remaining equivalent as far as concerns the form and arrangement of the packing.

The cross-section of figure 1 shows that the watch case includes a caseband 8, a back cover 13, a movement 7 housed in the case and a dial 6 surmounting movement 7. An assembly 3 including a bezel 1 exhibiting an annular interior shoulder 20, a crystal 2 fitted to the bezel by

This Sheet Has Been Replaced



means of a first packing 4 and an annular element forming a flange 5, may be driven in rotation relative to the caseband and to the dial.

Between the bezel and the caseband is squeezed a second round packing 9 which assures sealing of the case. Packing 9 is arranged between two coaxial cylindrical surfaces, one 22 of which bounds a portion of the bezel and the other 23 a portion of the caseband. A casing ring 10-11 arranged within caseband 8 presents an annular collar 21 resting on the shoulder 20 of the bezel 1 so as to engage or retain the rotatable assembly 3 on caseband 8. The caseband 8 shows in its lower portion a collar 24 extending towards the center of the case. On this collar 24 bears the casing ring 10-11. Screws 31 vertically positioned and traversing bores 25 provided in collar 24 are screwed into threads 26 provided in the ring in order to fix the ring to the caseband.

As mentioned hereinabove, packing 9 exhibits a round cross-section. From its manufacturing process, it also exhibits two diametrically opposed injection burrs symbolized on the figure by two dashes 14 and 15. In the dimensions used here, experience has shown when the bezel 1 is rotated, packing 9 rolls or twists on itself in an irregular manner so that the burrs 14 and 15 form helices over the entire periphery of the packing, thus creating a track between the outer world and the interior of the case, this route being used by water in order to penetrate the mechanism within the case.

It has been determined that the phenomenon of twisting may disappear if there be adopted for the O-ring a relationship between the interior diameter D_i of the ring and the diameter D_t of the cross-section of the thread constituting the ring, which is less than a limit value which may be estimated at 20. Thus, for an O-ring currently employed





in micromechanics and which shows a diameter D_i comprised between 0.8 and 5 mm and a diameter D_t comprised between 0.4 and 0.5 mm, such relationship is at worst $5/0.4 = 12.5$ and this O-ring will not twist. On the other hand, in the example shown on figure 1, O-ring 9 has an interior diameter D_i of 38 mm and a cross-section D_t of 0.7 mm hence a relationship $D_i/D_t = 38/0.7 = 57.3$ highly unfavourable.

In this latter case, since the diameter D_i of 38 mm is imposed by the design, it would be necessary to provide a thread cross-section of at least 1.9 mm to arrive at a relationship of 20 and avoid twisting of the packing. However, such arrangement will have as consequence an increase in the overall diameter of the timepiece.

The toroidal packing 9 shown on figure 1 additionally shows a second drawback. Effectively, through the slot referenced 19 on the figure, there may be introduced not only water, but also dust which by its abrasive action may damage the packing. The packing then runs the risk of no longer sealing out water. To provide a solution to this problem, certain designers provide two toroidal packings, one on top of the other, the first retaining dust and the second - which remains intact - retaining water. However, here the solution is both difficult and cumbersome.

The packing ring described in patent document FR-A-1 185 726 exhibits a polygonal cross-section having two regions separated by a depression which may recall a dumbbell configuration. However, the axis of such dumbbell is shown perpendicular to the axis of the ring in a manner such that if this latter is employed to seal a rotating bezel, one would end up with a prohibitive increase in the overall diameter of the timepiece. On the other hand, mounted between the caseband 8 and bezel 1 of figure 1, such ring would urge annular collar 21 onto shoulder 20



with a force such that the bezel could no longer be driven in rotation except at the price of a very substantial force not to mention the risk of seizing up.

Thus, in order to overcome the cited drawbacks, the present invention proposes a packing which, on the one hand, does not twist up and on the other hand, replaces two superposed seals. For this, such packing is characterized through the fact that its cross-section shows the form of dumbbell including two enlargements connected by a neck, the axis of the dumbbell passing through the neck and the two enlargements being parallel to the axis of the annular packing.

The invention will now be explained with the help of the description to follow given by way of example and in referring to the drawings in which :

- Figure 1 is a cross-section through a case for a timepiece showing a packing according to the prior art, said figure having been discussed hereinabove;

- figure 2 is a view similar to that of figure 1 in which a packing according to a first embodiment of the invention is shown;

- figure 3 is a partial view and to an enlarged scale of the cross-section shown on figure 2 in which a packing according to a second embodiment of the invention is shown, and

- figure 4 shows a method of manufacture of the packing shown on figure 3.



Figure 2 takes up in part what has been shown on figure 1, the same parts bearing thus the same references. In place of packing 9 of figure 1, on figure 2 there will be found a packing 30 the cross-section of which shows the form of a dumbbell defined by two enlargements 31 and 32 connected by a neck 33. Herein is concerned a definition according to the most general meaning of the invention.

More specifically and according to a first embodiment of the invention, figure 2 shows that the enlargements exhibit a rounded cross-section recalling to some extent the two O-ring packings brought into question hereinabove. Packing 30 is assembled between two circular elements, bezel 1 and caseband 8 which are fitted into one another, bezel 1 being adapted to be rotatively displaced relative to caseband 8. This assembly defines localized pressure zones on enlargements 31 and 32, such zones here being four in number, namely zones 34 and 34' for enlargement 31 and zones 35 and 35' for enlargement 32. During moulding of packing 30, it is arranged so that the injection burrs 36 and 37 are situated outside the pressure zones in a manner such that such zones are perfectly smooth, the burrs in certain cases being capable of creating a path for water. Thus packing 30 fulfils well the role expected of it, namely the impossibility of twisting and the faculty of retaining dust by the first enlargement 32 and water by the second enlargement 31.

Figure 3 shows a second preferred embodiment of the invention. Here, the enlargements 31 and 32 show a polygonal cross-section. In the same manner as in figure 2, such enlargements are connected by a neck 33. Here there are found the same pressure zones 34, 34', 35 and 35'. Here, likewise, during moulding of packing 30, it



will be arranged so that injection burrs 36 and 37 are situated outside the pressure zones. The choice of the polygonal form of enlargements 31 and 32 is dictated by the concern of separating as far as possible the pressure zones from the injection burrs. This separation is favoured by a special method of manufacture of the packing as will now be seen.

Figure 4 enables explaining the method of manufacture of packing 30 shown on figure 3. Figure 4 is a perspective view showing a partially cut-away mould from which emerges the packing which is to be obtained. The mould is formed from an upper portion 40 and a lower portion 41. When such portions are joined, an annular cavity 42 will be formed, the cross-section of which has the form of a dumb-bell including two enlargements 31 and 32 exhibiting a polygonal cross-section, such enlargements being connected by a neck 33. It is interesting to note that the axis X of the dumbbell is sloped in the manner of the rim of a dinner plate.

When the two portions 40 and 41 of the mould are assembled, there are formed what are called two parting surfaces 43 and 44 through which injection of elastic material takes place. Once such material has been injected (it generally concerns a polymerizable product) the two portions of the mould are separated and the packing 30 is removed. Finally, the packing is separated from the residue of injection material by cutting off. Such cut off, however, allows subsistence of the injection burrs as mentioned hereinabove and which it is desirable to maintain as far as possible away from the zones in which pressure is exerted on the enlargements when the packing is assembled on the object which it is intended to seal.

In the special case of figure 4, the inclination X of the annular cavity 42 relative to the direction Y of



separation of the moulds is on the order of 45° . In the same manner, the polygonal cross-section of the enlargements of the cavity show lines 45, 46, 47, 48, 49, 50 and 51 which are oriented so as to permit separation without straining and thus without damaging the elastic material from which the packing is made when lifting of the mould takes place. If such inclination did not exist and if the packing were moulded in the position which it exhibits when it is assembled on the object to be sealed, the material would be torn away during lifting and the joint would be unfit for use. In the same manner, such inclination enables transferring the injection burrs outside the pressure zones.

The fact that the packing is inclined to the exit from the moulding does not in any manner hinder its straight use in the part to be sealed, this coming above all from the fact that there exists a certain natural straightening and that the internal diameter D_i is large relative to the cross-section D_t .

It will be mentioned that the moulding technique which has just been described may be applied just as well to the packing with rounded enlargements according to figure 2. There, however, the injection burrs are closer to the pressure zones.

In the example of utilization of the packing according to the invention, hereinabove has been mentioned a time-piece. The invention is not limited to this domain of application, but may be employed whenever one is in the presence of two parts, the speeds of displacement of which are different, such parts being assembled concentrically or telescopically.



CLAIMS

1. Annular packing (30) characterized in that the cross-section is in the form of a dumbbell including two enlargements (31, 32) connected by a neck (33), the axis of the dumbbell passing through the neck and the two enlargements being parallel to the axis of the packing.

2. Packing as set forth in claim 1 characterized in that the enlargements exhibit a rounded cross-section.

3. Packing as set forth in claim 1 characterized in that the enlargements exhibits a polygonal cross-section.

4. Packing as set forth in claim 1 characterized in that it is assembled between two circular elements (1, 8) fitted into one another and adapted to be displaced relative to one another, the assembly defining pressure (34, 34', 35, 35') localized on said enlargements, the injection burrs (36, 37) present on said packing being located outside said pressure zones.

5. Method of manufacture of the packing as set forth in claim 3 or in claim 4 characterized in that a two-part mould (40, 41) is provided which once the parts are joined exhibits an annular cavity (42) the cross-section of which has the form of a dumbbell, the axis (X) of said dumbbell being inclined like the rim of a plate, in that an elastic material is injected into said cavity, in that the two parts of the mould are taken apart in order to extract the packing and in that the packing is separated from the injection residue by cutting.

6. Method as set forth in claim 5 characterized in that the inclination of said annular cavity relative to the direction of separation (Y) of the mould parts is such that said injection burrs are located outside said





pressure zones and that the polygonal cross-section of the enlargements in said cavity exhibits straight lines (45 to 51) oriented so as permit taking the mould apart without stressing the material of which the packing is made.

7. Utilization of the packing as set forth in claim 1 characterized in that said packing is arranged between a caseband (8) and a rotating bezel (1) in the timepiece.



Prior Art

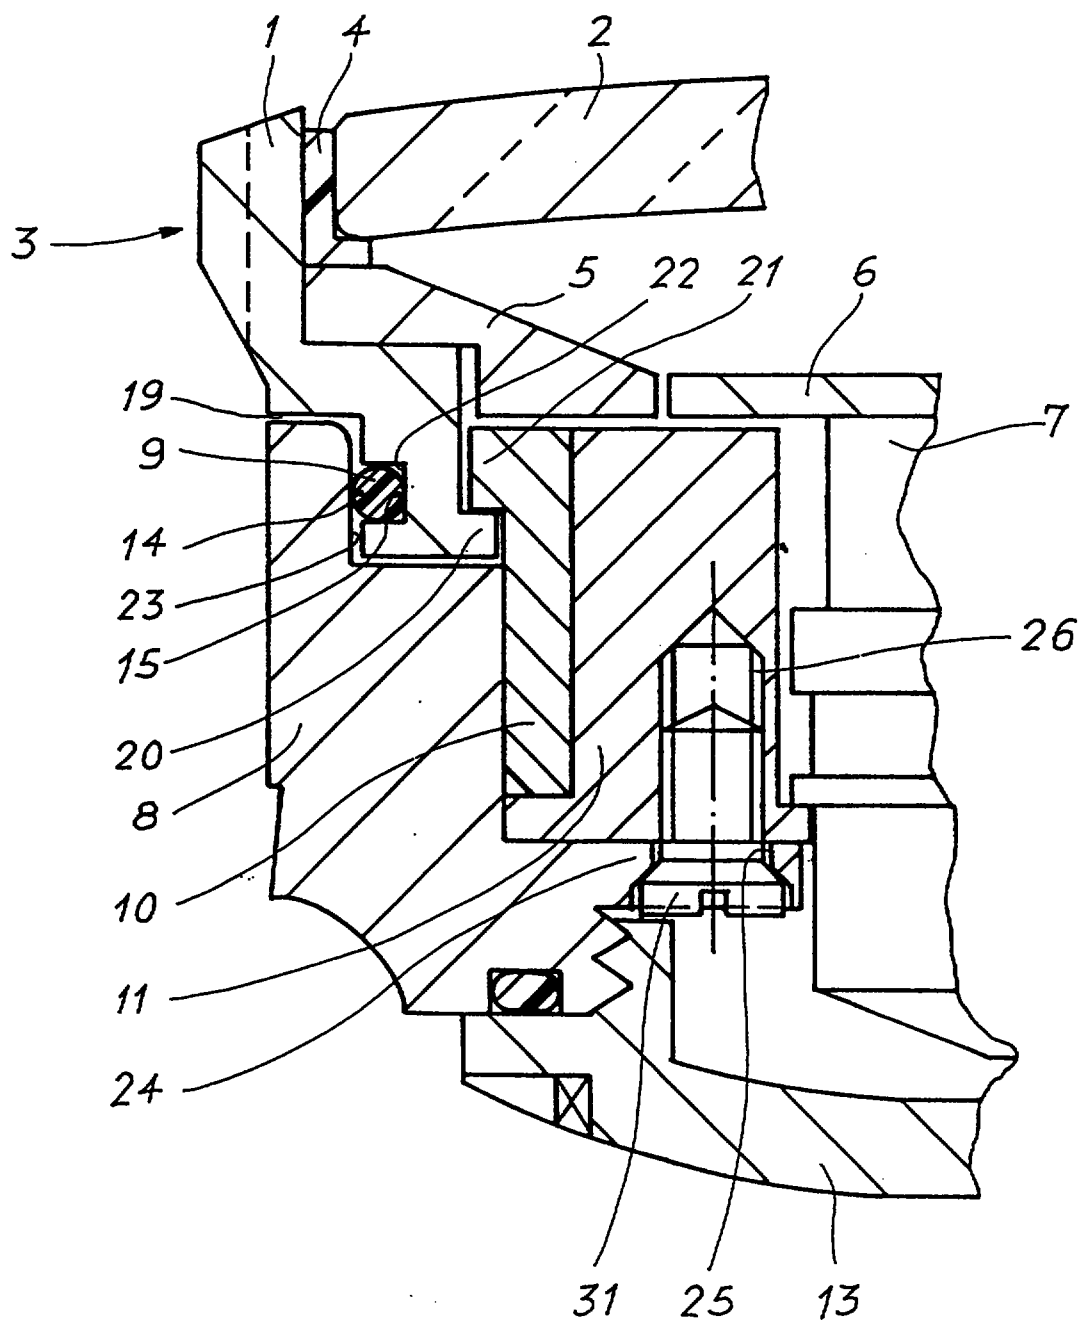


Fig. 1

This Sheet Has Been Replaced





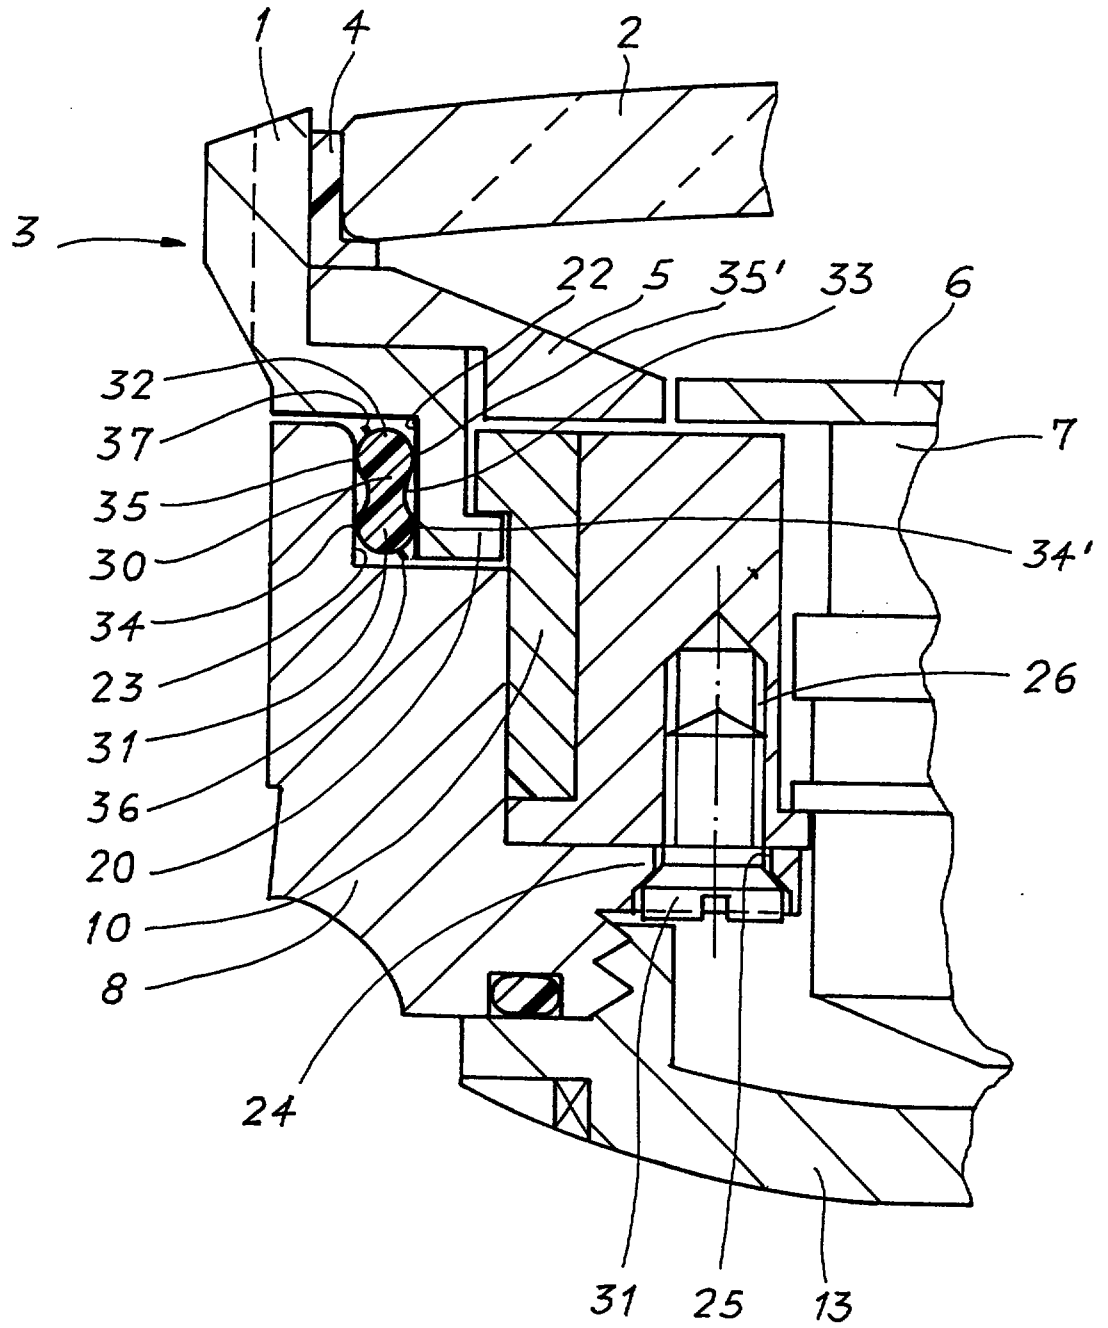


Fig. 2

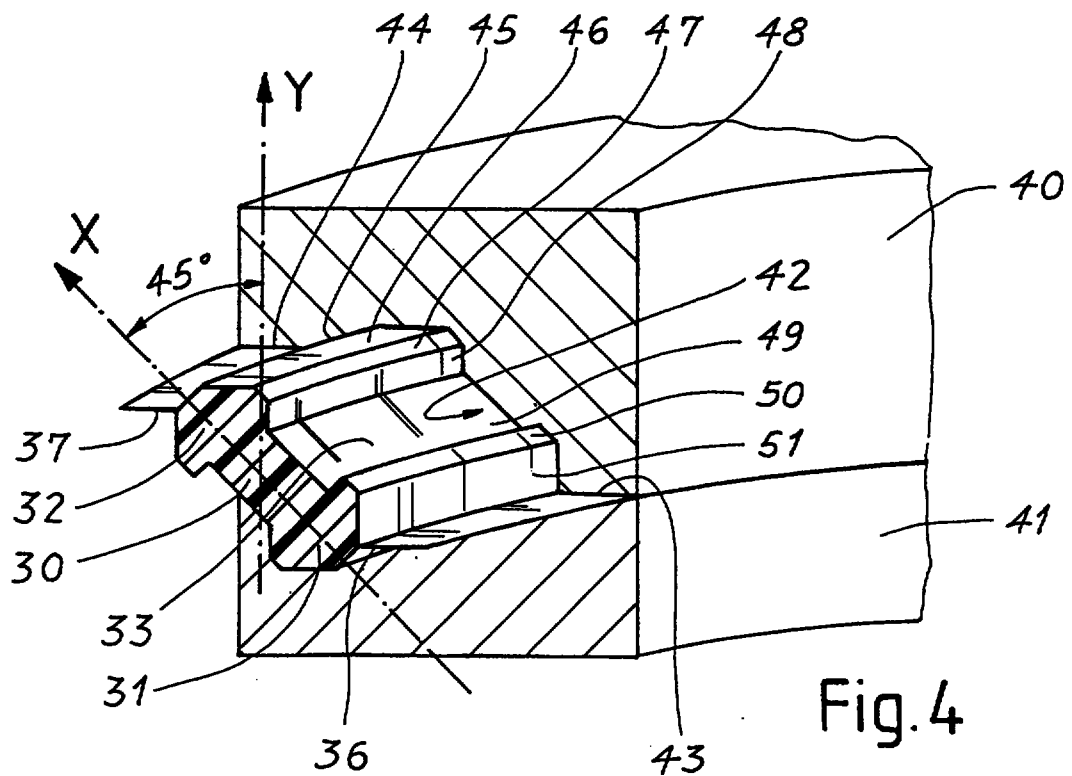

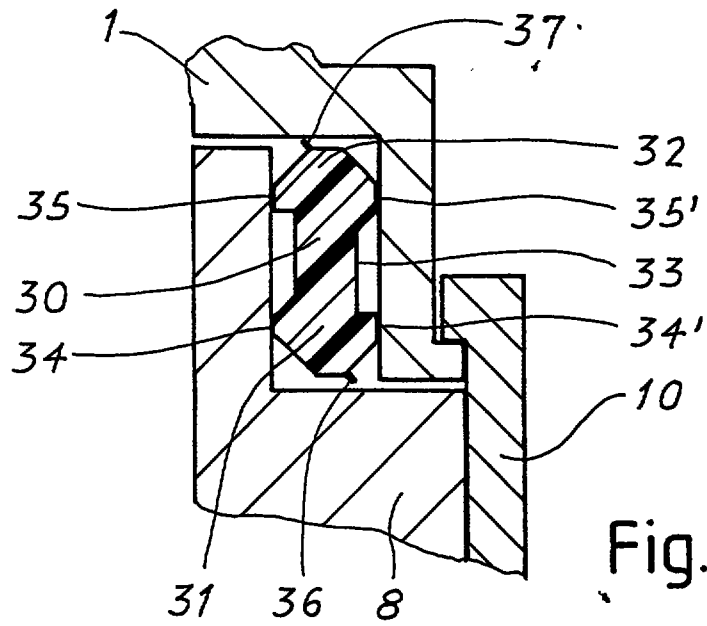

ABSTRACT

The annular packing (30) of this invention has a cross-section in the form of a dumbbell including two enlargements (31, 32) connected by a neck (33). In a preferred embodiment the enlargements exhibit a polygonal cross-section. The packing advantageously replaces an O-ring seal in which the interior diameter of the ring is large relative to the diameter of the cross-section of said ring. The packing is arranged between two parts driven at different speeds, in precision mechanisms or in horology.

Figure 3

This Sheet Has Been Replaced



Case 901

REPLACEMENT SHEETS	SO
☒ Description : paged 1. to paged 7.	- 1 -
☒ Claim(s) : paged 8. to paged 9.	
☒ Drawing(s) : paged 10. to paged 11.	
☒ Abstract : paged 12. to paged 13.	
DATE OF RECEIPT 4/2/96	

PACKING

The present invention relates to a packing.

Packings are widely employed in mechanisms when it is a matter of sealing off an apparatus from dust or water for example. In precision mechanisms or micromechanisms, such packings are currently called O-ring seals or indeed toroidal seals in view of their annular form and their generally round cross-section.

An example drawn from horology will make readily understandable to what end the object of the present invention may be employed, such object being readily usable in many other known domains as for instance that of photography (zoom lenses) or equipment in general.

In its first embodiment the invention described in patent document CH-A-432 388 has as object a watch case comprising two elements which may be oriented in any desired manner relative to one another, one comprising a first annular element bearing a glass and the other a second annular element on which the first is rotatively mounted, a packing being inserted between these two elements.

Figure 1 of the present invention shows such prior art, somewhat modified relative to the cited document, but however remaining equivalent as far as concerns the form and arrangement of the packing.

The cross-section of figure 1 shows that the watch case includes a caseband 8, a back cover 13, a movement 7 housed in the case and a dial 6 surmounting movement 7. An assembly 3 including a bezel 1 exhibiting an annular interior shoulder 20, a crystal 2 fitted to the bezel by

This is the replacement sheet

Date: 06 DEC 1996

means of a first packing 4 and an annular element forming a flange 5, may be driven in rotation relative to the caseband and to the dial.

Between the bezel and the caseband is squeezed a second round packing 9 which assures sealing of the case. Packing 9 is arranged between two coaxial cylindrical surfaces, one 22 of which bounds a portion of the bezel and the other 23 a portion of the caseband. A casing ring 10-11 arranged within caseband 8 presents an annular collar 21 resting on the shoulder 20 of the bezel 1 so as to engage or retain the rotatable assembly 3 on caseband 8. The caseband 8 shows in its lower portion a collar 24 extending towards the center of the case. On this collar 24 bears the casing ring 10-11. Screws 31 vertically positioned and traversing bores 25 provided in collar 24 are screwed into threads 26 provided in the ring in order to fix the ring to the caseband.

As mentioned hereinabove, packing 9 exhibits a round cross-section. From its manufacturing process, it also exhibits two diametrically opposed injection burrs symbolized on the figure by two dashes 14 and 15. In the dimensions used here, experience has shown when the bezel 1 is rotated, packing 9 rolls or twists on itself in an irregular manner so that the burrs 14 and 15 form helices over the entire periphery of the packing, thus creating a track between the outer world and the interior of the case, this route being used by water in order to penetrate the mechanism within the case.

It has been determined that the phenomenon of twisting may disappear if there be adopted for the O-ring a relationship between the interior diameter D_i of the ring and the diameter D_t of the cross-section of the thread constituting the ring, which is less than a limit value which may be estimated at 20. Thus, for an O-ring currently employed

This is the replacement sheet

Date: 06 DEC 1996

in micromechanics and which shows a diameter D_i comprised between 0.8 and 5 mm and a diameter D_t comprised between 0.4 and 0.5 mm, such relationship is at worst $5/0.4 = 12.5$ and this O-ring will not twist. On the other hand, in the example shown on figure 1, O-ring 9 has an interior diameter D_i of 38 mm and a cross-section D_t of 0.7 mm hence a relationship $D_i/D_t = 38/0.7 = 57.3$ highly unfavourable.

In this latter case, since the diameter D_i of 38 mm is imposed by the design, it would be necessary to provide a thread cross-section of at least 1.9 mm to arrive at a relationship of 20 and avoid twisting of the packing. However, such arrangement will have as consequence an increase in the overall diameter of the timepiece.

The toroidal packing 9 shown on figure 1 additionally shows a second drawback. Effectively, through the slot referenced 19 on the figure, there may be introduced not only water, but also dust which by its abrasive action may damage the packing. The packing then runs the risk of no longer sealing out water. To provide a solution to this problem, certain designers provide two toroidal packings, one on top of the other, the first retaining dust and the second - which remains intact - retaining water. However, here the solution is both difficult and cumbersome.

The packing ring described in patent document FR-A-1 185 726 exhibits a polygonal cross-section having two regions separated by a depression which may recall a dumbbell configuration. However, the axis of such dumbbell is shown perpendicular to the axis of the ring in a manner such that if this latter is employed to seal a rotating bezel, one would end up with a prohibitive increase in the overall diameter of the timepiece. On the other hand, mounted between the caseband 8 and bezel 1 of figure 1, such ring would urge annular collar 21 onto shoulder 20

This is the replacement sheet

Date: 06 DEC 1996

with a force such that the bezel could no longer be driven in rotation except at the price of a very substantial force not to mention the risk of seizing up.

Thus, in order to overcome the cited drawbacks, the present invention proposes a packing which, on the one hand, does not twist up and on the other hand, replaces two superposed seals. For this, such packing is characterized through the fact that its cross-section shows the form of dumbbell including two enlargements connected by a neck, the axis of the dumbbell passing through the neck and the two enlargements being parallel to the axis of the annular packing.

The invention will now be explained with the help of the description to follow given by way of example and in referring to the drawings in which :

- Figure 1 is a cross-section through a case for a timepiece showing a packing according to the prior art, said figure having been discussed hereinabove;

- figure 2 is a view similar to that of figure 1 in which a packing according to a first embodiment of the invention is shown;

- figure 3 is a partial view and to an enlarged scale of the cross-section shown on figure 2 in which a packing according to a second embodiment of the invention is shown, and

- figure 4 shows a method of manufacture of the packing shown on figure 3.

Figure 2 takes up in part what has been shown on figure 1, the same parts bearing thus the same references. In place of packing 9 of figure 1, on figure 2 there will be found a packing 30 the cross-section of which shows the form of a dumbbell defined by two enlargements 31 and 32 connected by a neck 33. Herein is concerned a definition according to the most general meaning of the invention.

More specifically and according to a first embodiment of the invention, figure 2 shows that the enlargements exhibit a rounded cross-section recalling to some extent the two O-ring packings brought into question hereinabove. Packing 30 is assembled between two circular elements, bezel 1 and caseband 8 which are fitted into one another, bezel 1 being adapted to be rotatively displaced relative to caseband 8. This assembly defines localized pressure zones on enlargements 31 and 32, such zones here being four in number, namely zones 34 and 34' for enlargement 31 and zones 35 and 35' for enlargement 32. During moulding of packing 30, it is arranged so that the injection burrs 36 and 37 are situated outside the pressure zones in a manner such that such zones are perfectly smooth, the burrs in certain cases being capable of creating a path for water. Thus packing 30 fulfils well the role expected of it, namely the impossibility of twisting and the faculty of retaining dust by the first enlargement 32 and water by the second enlargement 31.

Figure 3 shows a second preferred embodiment of the invention. Here, the enlargements 31 and 32 show a polygonal cross-section. In the same manner as in figure 2, such enlargements are connected by a neck 33. Here there are found the same pressure zones 34, 34', 35 and 35'. Here, likewise, during moulding of packing 30, it

This is the replacement sheet

Date: 06 DEC 1996

will be arranged so that injection burrs 36 and 37 are situated outside the pressure zones. The choice of the polygonal form of enlargements 31 and 32 is dictated by the concern of separating as far as possible the pressure zones from the injection burrs. This separation is favoured by a special method of manufacture of the packing as will now be seen.

Figure 4 enables explaining the method of manufacture of packing 30 shown on figure 3. Figure 4 is a perspective view showing a partially cut-away mould from which emerges the packing which is to be obtained. The mould is formed from an upper portion 40 and a lower portion 41. When such portions are joined, an annular cavity 42 will be formed, the cross-section of which has the form of a dumb-bell including two enlargements 31 and 32 exhibiting a polygonal cross-section, such enlargements being connected by a neck 33. It is interesting to note that the axis X of the dumbbell is sloped in the manner of the rim of a dinner plate.

When the two portions 40 and 41 of the mould are assembled, there are formed what are called two parting surfaces 43 and 44 through which injection of elastic material takes place. Once such material has been injected (it generally concerns a polymerizable product) the two portions of the mould are separated and the packing 30 is removed. Finally, the packing is separated from the residue of injection material by cutting off. Such cut off, however, allows subsistence of the injection burrs as mentioned hereinabove and which it is desirable to maintain as far as possible away from the zones in which pressure is exerted on the enlargements when the packing is assembled on the object which it is intended to seal.

In the special case of figure 4, the inclination X of the annular cavity 42 relative to the direction Y of

This is the replacement sheet

Date: 06 DEC 1996

separation of the moulds is on the order of 45° . In the same manner, the polygonal cross-section of the enlargements of the cavity show lines 45, 46, 47, 48, 49, 50 and 51 which are oriented so as to permit separation without straining and thus without damaging the elastic material from which the packing is made when lifting of the mould takes place. If such inclination did not exist and if the packing were moulded in the position which it exhibits when it is assembled on the object to be sealed, the material would be torn away during lifting and the joint would be unfit for use. In the same manner, such inclination enables transferring the injection burrs outside the pressure zones.

The fact that the packing is inclined to the exit from the moulding does not in any manner hinder its straight use in the part to be sealed, this coming above all from the fact that there exists a certain natural straightening and that the internal diameter D_i is large relative to the cross-section D_t .

It will be mentioned that the moulding technique which has just been described may be applied just as well to the packing with rounded enlargements according to figure 2. There, however, the injection burrs are closer to the pressure zones.

In the example of utilization of the packing according to the invention, hereinabove has been mentioned a time-piece. The invention is not limited to this domain of application, but may be employed whenever one is in the presence of two parts, the speeds of displacement of which are different, such parts being assembled concentrically or telescopically.

This is the replacement sheet

Date: 06 DEC 1996



THIS SHEET HAS BEEN
REPLACED

CLAIMS

1. Annular packing (30) characterized in that the cross-section is in the form of a dumbbell including two enlargements (31, 32) connected by a neck (33), the axis of the dumbbell passing through the neck and the two enlargements being parallel to the axis of the packing.

2. Packing as set forth in claim 1 characterized in that the enlargements exhibit a rounded cross-section.

3. Packing as set forth in claim 1 characterized in that the enlargements exhibits a polygonal cross-section.

4. Packing as set forth in claim 1 characterized in that it is assembled between two circular elements (1, 8) fitted into one another and adapted to be displaced relative to one another, the assembly defining pressure (34, 34', 35, 35') localized on said enlargements, the injection burrs (36, 37) present on said packing being located outside said pressure zones.

5. Method of manufacture of the packing as set forth in claim 3 or in claim 4 characterized in that a two-part mould (40, 41) is provided which once the parts are joined exhibits an annular cavity (42) the cross-section of which has the form of a dumbbell, the axis (X) of said dumbbell being inclined like the rim of a plate, in that an elastic material is injected into said cavity, in that the two parts of the mould are taken apart in order to extract the packing and in that the packing is separated from the injection residue by cutting.

6. Method as set forth in claim 5 characterized in that the inclination of said annular cavity relative to the direction of separation (Y) of the mould parts is such that said injection burrs are located outside said

This is the replacement sheet



Date: 06 DEC 1996



pressure zones and that the polygonal cross-section of the enlargements in said cavity exhibits straight lines (45 to 51) oriented so as permit taking the mould apart without stressing the material of which the packing is made.

7. Utilization of the packing as set forth in claim 1 characterized in that said packing is arranged between a caseband (8) and a rotating bezel (1) in the timepiece.



ABSTRACT

PACKING

The annular packing (30) of this invention has a cross-section in the form of a dumbbell including two enlargements (31, 32) connected by a neck (33). In a preferred embodiment the enlargements exhibit a polygonal cross-section. The packing advantageously replaces an O-ring seal in which the interior diameter of the ring is large relative to the diameter of the cross-section of said ring. The packing is arranged between two parts driven at different speeds, in precision mechanisms or in horology.

Figure 3

Prior Art

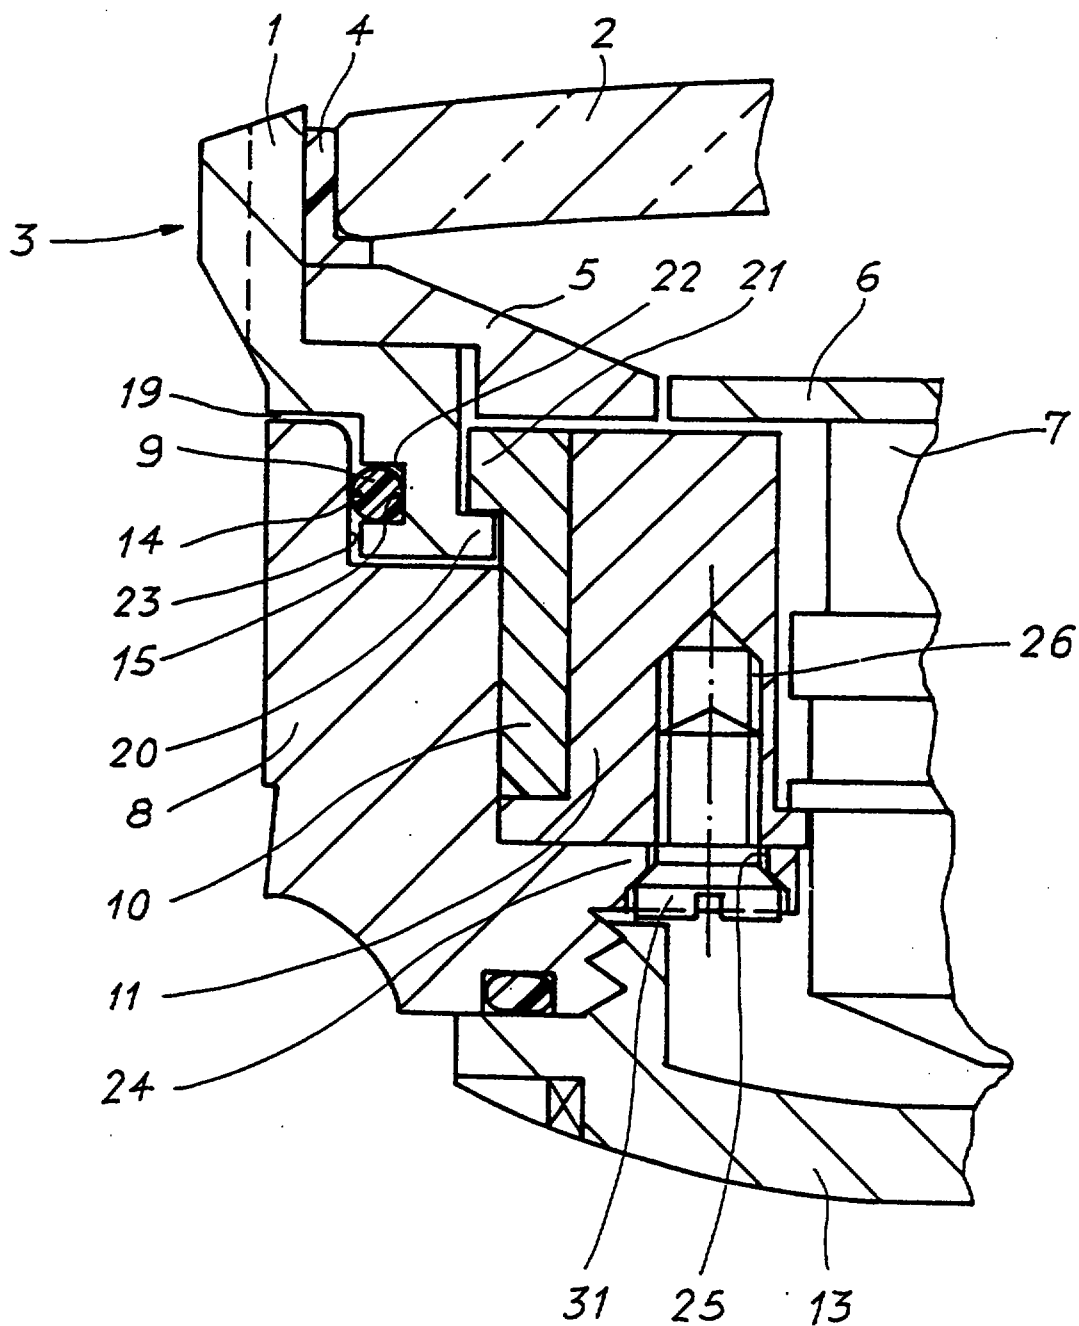


Fig. 1

3-1234032

This is the replacement sheet

Date: 06 DEC 1996

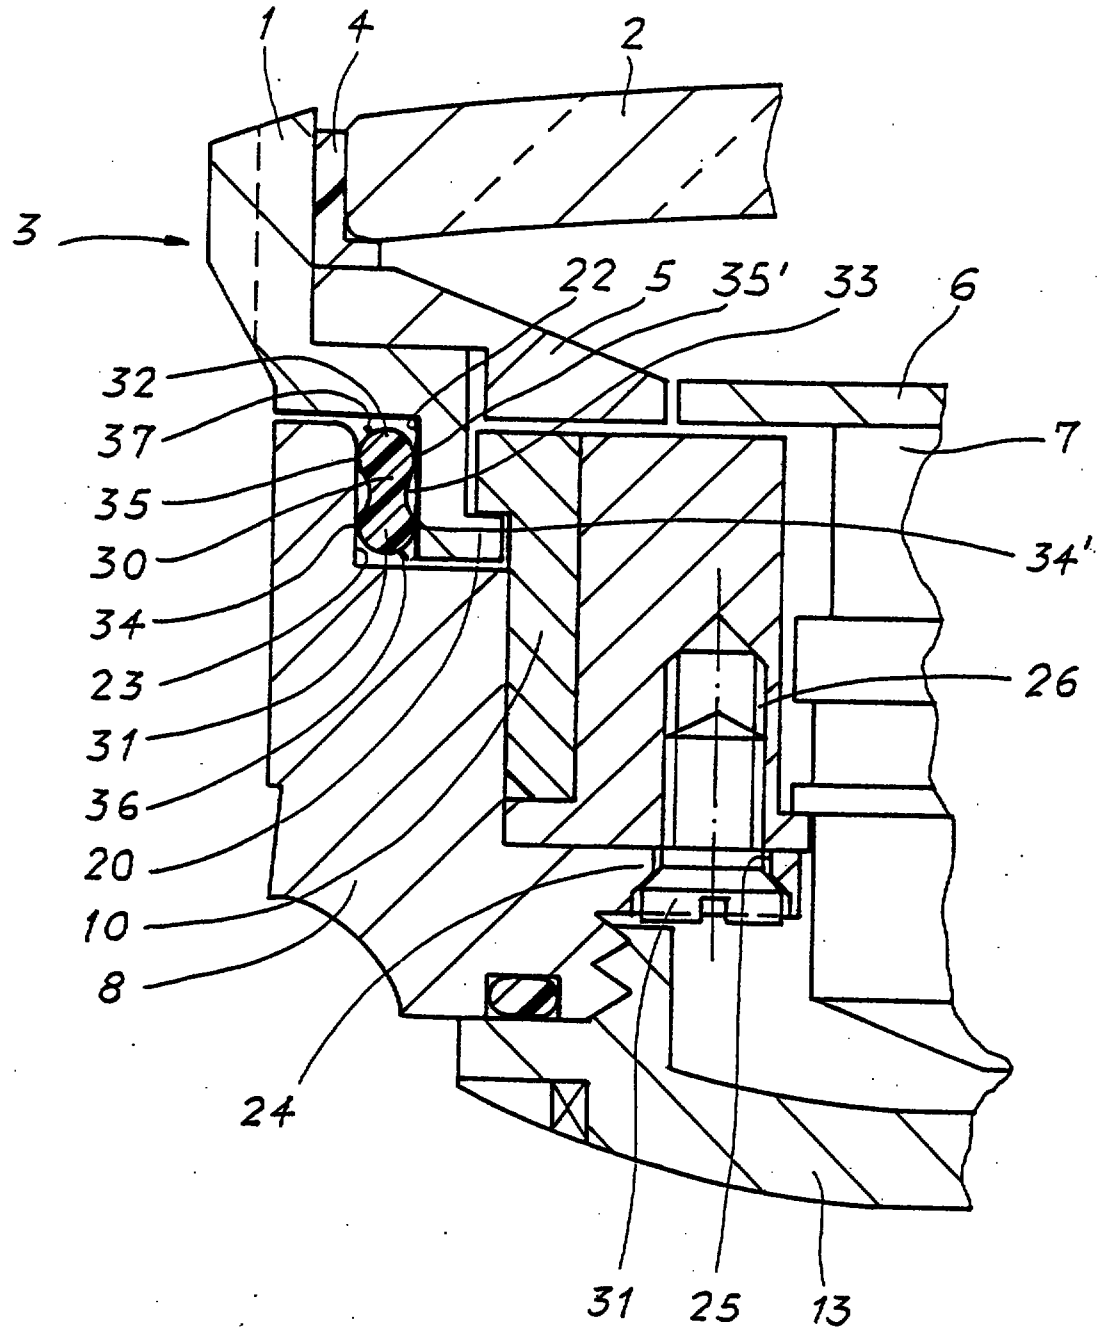


Fig. 2

This is the replacement sheet

Date: 06 DEC 1996

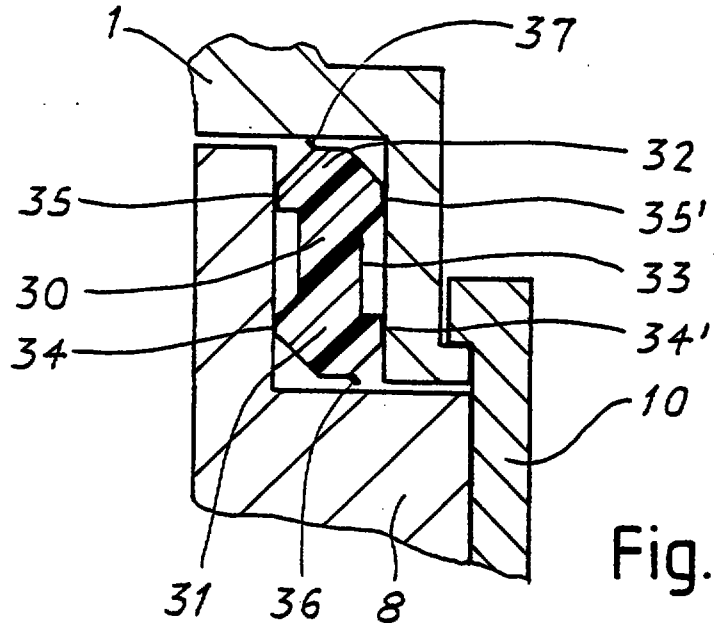


Fig. 3

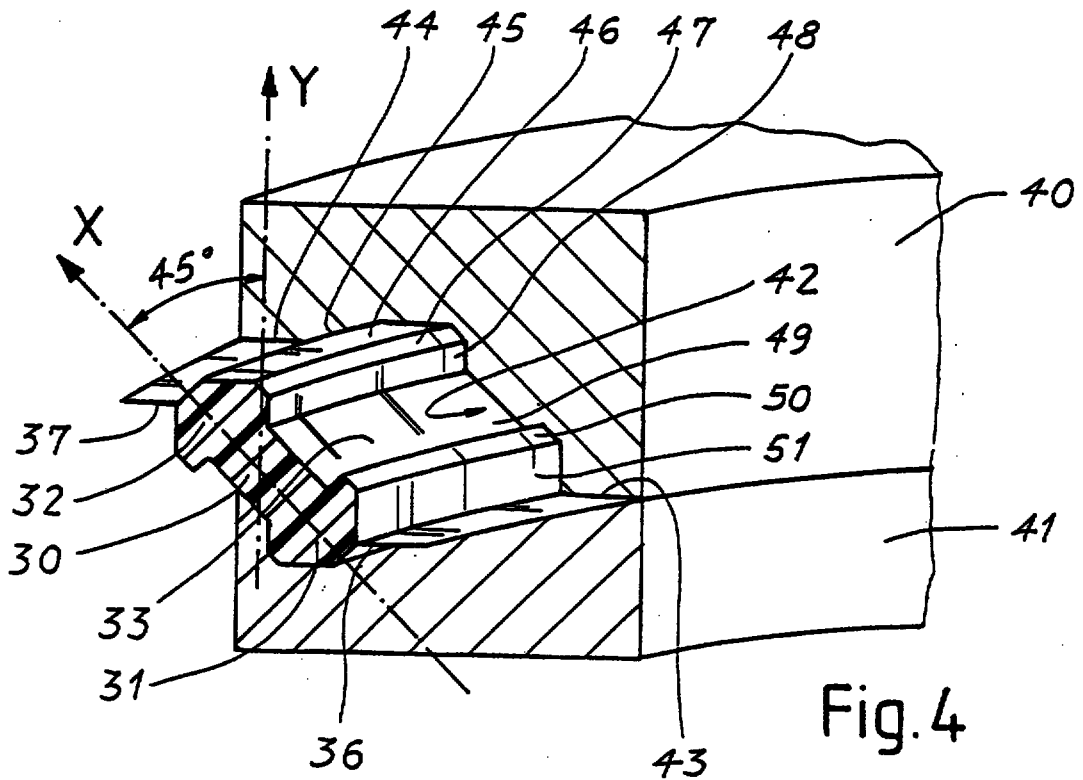


Fig. 4

REPLACEMENT SHEETS		SG
☐	Description : paged to paged	
☒	Claim(s) : paged ..1.. to paged ..1..	
☐	Drawing(s) : paged to paged	
☐	Abstract : paged to paged	
DATE OF RECEIPT 24/10/98		
CLAIMS		

- 8 -

REPLACEMENT SHEET - 24 OCTOBER 1998

1. Annular packing (30) having a straight cross-section in the form of a dumbbell including two enlargements (31, 32) connected by a neck (33), characterized by the fact that the axis of the dumbbell passing through the neck and the two enlargements is parallel to the axis of the packing and by the fact that it is assembled between two circular elements (1, 8) fitted into one another and adapted to be displaced relative to one another around an axis substantially parallel to the packing axis, said assembly defining pressure zones (34, 34', 35, 35') localized on said enlargements, the injection burrs (36, 37) presented on said packing being located outside said pressure zones.

2. Packing as set forth in claim 1 characterized in that the enlargements exhibit a rounded cross-section.

3. Packing as set forth in claim 1 characterized in that the enlargements exhibits a polygonal cross-section.

4. Method of manufacture of the packing as set forth in claim 3 characterized in that a two-part mould (40, 41) is provided which once the parts are joined exhibits an annular cavity (42) the cross-section of which has the form of a dumbbell, the axis (X) of said dumbbell being inclined like the rim of a plate, in that an elastic material is injected into said cavity, in that the two parts of the mould are taken apart in order to extract the packing and in that the packing is separated from the injection residue by cutting.

5. Method as set forth in claim 4 characterized in that the inclination of said annular cavity relative to the direction of separation (Y) of the mould parts is such that said injection burrs are located outside said



REPLACEMENT SHEET - 24 OCTOBER 1998

pressure zones and that the polygonal cross-section of the enlargements in said cavity exhibits straight lines (45 to 51) oriented so as permit taking the mould apart without stressing the material of which the packing is made.

6. Utilization of the packing as set forth in claim 1 characterized in that said packing is arranged between a caseband (8) and a rotating bezel (1) in the timepiece.

