

HIGH OLEIC ACID ELECTRICAL INSULATION FLUIDS AND METHOD OF MAKING THE SAME

FIELD OF THE INVENTION

The invention relates to a high oleic oil composition useful as an electrical insulation fluid, to electrical insulation fluid compositions and electrical apparatuses which comprise the same. The high oleic oil compositions of the invention have electrical properties which make them well suited as insulation fluids in electrical components.

BACKGROUND OF THE INVENTION

The electrical industry uses a variety of insulating fluids which are easily available and cost effective. Examples are mineral oil, silicone fluid, and synthetic hydrocarbon oils used in transformers, power cables and capacitors. Examples of such fluids include those described in U.S. Patent Number 4,082,866 issued April 4, 1978 to Link, U.S. Patent Number 4,206,066 issued June 3, 1980 to Rinehart, U.S. Patent Number 4,621,302 issued November 4, 1986 to Sato et al., U.S. Patent Number 5,017,733 issued May 21, 1991 to Sato et al. U.S. Patent Number 5,250,750 issued October 5, 1993 to Shubkin et al., and U.S. Patent Number 5,336,847 issued August 9, 1994 to Nakagami, which are each incorporated herein by reference.

Many of these fluids are not considered to be biodegradable in a reasonable time frame. Some have electrical properties which render them less than optimal. In recent years regulatory agencies have become increasingly

- 2 -

concerned about oil spills which can contaminate the ground soil and other areas. A biodegradable oil would be desirable for electrical apparatus such as transformers used in populated areas and shopping centers.

5 Vegetable oils are fully biodegradable, but the oils presently available in the market are not electrical grade. A few vegetable oils such as rapeseed oil and castor oil have been used in limited quantities, mostly in capacitors, but these are not oleic esters.

10 There is a need for a fully biodegradable electrical fluid. There is a need for electrical apparatuses which comprise such an oil. There is a need for a method of processing vegetable oil to electrical grade.

SUMMARY OF THE INVENTION

15 The present invention relates to high oleic acid triglyceride compositions that comprise fatty acid components of at least 75% oleic acid, less than 10% diunsaturated fatty acid component; less than 3% triunsaturated fatty acid component; and less than 8%
20 saturated fatty acid component; and wherein said composition is further characterized by the properties of a dielectric strength of at least 35 KV/100 mil (2.5 mm) gap, a dissipation factor of less than 0.05% at 25°C, acidity of less than 0.03 mg KOH/g, electrical conductivity of less
25 than 1 pS/m at 25°C, a flash point of at least 250°C and a pour point of at least -15°C.

The present invention relates to an electrical insulation fluid comprising at least 75% of a high oleic acid triglyceride composition that comprise fatty acid
30 components of at least 75% oleic acid, less than 10% diunsaturated fatty acid component; less than 3% triunsaturated fatty acid component; and less than 8% saturated fatty acid component; and wherein said composition is further characterized by the properties of a dielectric
35 strength of at least 35 KV/100 mil gap, a dissipation factor of less than 0.05% at 25°C, acidity of less than 0.03 mg

- 3 -

KOH/g, electrical conductivity of less than 1 pS/m at 25°C, a flash point of at least 250°C and a pour point of at least -15°C, and one or more additive selected from the group of an antioxidant additive, a pour point depressant additive and a copper deactivator.

The present invention relates to electrical apparatuses comprising the electrical insulation fluid.

The present invention relates to the use of electrical insulation fluid to provide insulation in electrical apparatuses.

The present invention relates to a process for preparing the high oleic acid triglyceride composition comprising the steps of combining refined, bleached and deodorized high oleic acid triglyceride with clay to form a mixture and filtering the mixture to remove the clay.

DETAILED DESCRIPTION OF THE INVENTION

This present invention provides a novel application for high oleic vegetable oils as electrical insulation fluids. Vegetable oils usually have a high percent of triglyceride esters of saturated and unsaturated organic acids. When the acid is saturated, the triglyceride is either a semi-solid or a liquid with high freezing point. Unsaturated acids produce oils with low freezing points. However, monounsaturated acids are preferred over diunsaturated and triunsaturated acids because the latter tend to dry fast in air due to cross-linking with oxygen. Increasing the amount of diunsaturates and triunsaturates makes the oil more vulnerable to oxidation; increasing the saturates raises the pour point. Ideally, the higher the monosaturate content, the better the oil as an electrical fluid.

Oleic acid is a monounsaturated acid found as triglyceride ester in many natural oils such as sunflower, olive oil and safflower in relatively high proportions (above 60%). High oleic acid content is usually above 75% of the total acid content. Oleic acid content above 80% is

- 4 -

achieved by genetic manipulation and breeding. Two oils that are currently available in the United States with high oleic acid content and low saturates are sunflower oil and canola oil. These oils are of value in producing high quality lubricating oils but have not been used in the production of electrical insulation fluids.

High oleic oils may be derived from plant seeds such as sunflower and canola which have been genetically modified to yield high oleic content. The pure oils are triglycerides of certain fatty acids with a carbon chain ranging from 16 to 22 carbon atoms. If the carbon chain has no double bonds, it is a saturated oil, and is designated $C_n:0$ where n is the number of carbon atoms. Chains with one double bond are monounsaturated and are designated $C_n:1$; with two double bonds, it will be $C_n:2$ and with three double bonds $C_n:3$. Oleic acid is a $C_{18}:1$ acid while erucic acid is a $C_{22}:1$ acid. The acids are in the combined state as triglycerides, and when the oils are hydrolyzed they are separated into the acid and glycerol components. High oleic oils contain more than 75% oleic acid (in combined state with glycerol), the remaining being composed mainly of $C_{18}:0$, $C_{18}:2$ and $C_{18}:3$ acids (also in combined state with glycerol). These acids are known as stearic, linoleic and linolenic. Oils with a high percentage of double and triple unsaturated molecules are unsuitable for electrical application because they react with air and produce oxidation products. Monounsaturated oils such as oleic acid esters may also react with air, but much slower, and can be stabilized with oxidation inhibitors.

A typical 85% high oleic oil has the following approximate composition:

Saturates:	3-5%
monounsaturates:	84-85%
diunsaturates:	3-7%
triunsaturates:	1-3%

While the present invention provides for the use of vegetable oils, the invention may use synthetic oil

- 5 -

having the same compositional characteristics of those oils isolated from plants. While plant derived material is suitable for almost all applications, synthetic material may provide a desirable alternative in some applications.

5 According to the present invention, high oleic acid content oils are used as starting materials for the production of an oil composition which has physical properties useful for electrical insulation fluids. The present invention provides the processed compositions having
10 specific structural and physical characteristics and properties, methods of making such composition, electrical insulation fluids which comprise the composition, electrical apparatuses which comprise the electrical insulation fluids and methods of insulating electrical apparatuses using such
15 fluids.

 The present invention provides a high oleic acid triglyceride composition useful as an electrical insulation fluid and more particularly as a component material of an electrical insulation fluid. A triglyceride composition is
20 a glycerol backbone linked to three fatty acid molecules. The triglyceride compositions of the invention comprise fatty acid components of at least 75% oleic acid. The remaining fatty acid components include less than 10% diunsaturated fatty acid component, less than 3%
25 triunsaturated fatty acid component, and less than 8% saturated fatty acid component.

 The triglyceride compositions of the invention preferably comprise fatty acid components of at least 80% oleic acid. The triglyceride compositions of the invention
30 more preferably comprise fatty acid components of at least 85% oleic acid. In some embodiments, the triglyceride compositions of the invention comprise fatty acid components of 90% oleic acid. In some embodiments, the triglyceride compositions of the invention comprise fatty acid components
35 of greater than 90% oleic acid.

 Di-unsaturated, triunsaturated and saturated fatty acid components present in the triglyceride are preferably

- 6 -

C16-C22. It is preferred that 80% or more of the remaining fatty acid components are C18 diunsaturated, triunsaturated and saturated fatty acids, i.e. linoleic, linolenic and stearic acids, respectively. In some embodiments, the diunsaturated, triunsaturated and saturated fatty acid components of the triglyceride comprise at least 75% oleic acid, less than 3% linoleic acid, less than 4% stearic acid and less than 4% palmitic acid (saturated C16).

The triglyceride compositions of the invention are of an electric grade. That is, they have specific physical properties which make them particularly suited for use as an electrical insulation fluid. The dielectric strength of a triglyceride composition of the invention is at least 35 KV/100 mil (2.5 mm) gap, the dissipation factor is less than 0.05% at 25°C, the acidity is less than 0.03 mg KOH/g, the electrical conductivity is less than 1 pS/m at 25°C, the flash point is at least 250°C and the pour point is at least -15°C.

The dielectric strength, dissipation factor, acidity, electrical conductivity, flash point and pour point are each measured using the published standards set forth in the Annual Book of ASTM Standards (in Volumes 5 and 10) published by the American Society for Testing Materials (ASTM), 100 Barr Harbor Drive West Conshohocken PA 19428, which is incorporated herein by reference. The dielectric strength is determined using ASTM test method D 877. The dissipation factor is determined using ASTM test method D 924. The acidity is determined using ASTM test method D 974. The electrical conductivity is determined using ASTM test method D 2624. The flash point is determined using ASTM test method D 92. The pour point is determined using ASTM test method D 97.

The dielectric strength is measured by taking 100-150 ml oil sample in a test cell and applying a voltage between test electrodes separated by a specified gap. The breakdown voltage is noted. The test is preferably run five times and the average value is calculated. The dielectric

- 7 -

strength of a triglyceride composition of the invention is at least 35 KV/100 mil (2.5 mm) gap. In some preferred embodiments, it is 40 KV/100 mil (2.5 mm) gap.

5 The dissipation factor is a measure of the electrical loss due to conducting species and is tested by measuring the capacitance of fluids in a test cell using a capacitance bridge. The dissipation factor of a triglyceride composition of the invention is less than 0.05% at 25C. In some preferred embodiments, it is less than 10 0.02%. In some preferred embodiments, it is less than 0.01%.

The acidity is measured by titrating a known volume of oil with a solution of alcoholic KOH to neutralization point. The weight of the oil in grams per mg 15 KOH is referred to interchangeably as the acidity number or the neutralization number. The acidity of a triglyceride composition of the invention is less than 0.03 mg KOH/g. In some preferred embodiments, it is less than 0.02 mg KOH/g.

20 The electrical conductivity is measured using a conductivity meter such as an Emcee meter. The electrical conductivity of a triglyceride composition of the invention is less than 1 pS/m at 25°C. In some preferred embodiments, it is less than 0.25 pS/m.

25 The flash point is determined by placing an oil sample in a flashpoint tester and determining the temperature at which it ignites. The flash point of a triglyceride composition of the invention is at least 250°C. In some preferred embodiments, it is at least 300°C.

30 The pour point is determined by cooling an oil sample with dry ice/acetone and determining the temperature at which the liquid becomes a semi-solid. The pour point of a triglyceride composition of the invention is not greater than -15°C. In some preferred embodiments, it is not 35 greater than -20°C. In some preferred embodiments, it is not greater than -40°C.

- 8 -

In some preferred embodiments, the triglyceride composition of the invention is characterized by the properties of a dielectric strength of at least 40 KV/100 mil (2.5 mm) gap, a dissipation factor of less than 0.02% at 25°C, acidity of less than 0.02 mg KOH/g, electrical conductivity of less than .25 pS/m at 25°C, a flash point of at least 300°C and a pour point of not greater than -20°C. In some preferred embodiments, the pour point is not greater than -40°C.

10 In some preferred embodiments, the triglyceride composition of the invention comprises fatty acid components of at least 75% oleic acid, linoleic acid at a proportion of less than 10%, linoleic acid at a proportion of less than 3%, stearic acid in a proportion of less than 4%, and
15 palmitic acid in a proportion of less than 4%, and is characterized by the properties of a dielectric strength of at least 40 KV/100 mil (2.5 mm) gap, a dissipation factor of less than 0.02% at 25°C, acidity of less than 0.02 mg KOH/g, electrical conductivity of less than .25 pS/m at 25°C, a
20 flash point of at least 300°C and a pour point of not greater than -20°C. In some preferred embodiments, the pour point is not greater than -40°C.

Triglycerides with high oleic acid oil content are described in U.S. Patent Number 4,627,192 issued December 4, 1986 to Fick and U.S. Patent Number 4,743,402 issued May 10, 1988 to Fick, which are incorporated herein by reference. These oils or those with similar fatty acid component content according to the present invention may be processed to yield an oil with the desired physical properties. High
25 oleic vegetable oils may be obtained from commercial suppliers as RBD oils (refined, bleached and deodorized) which are further processed according to the present invention to yield high oleic oils useful in electrical insulation fluid compositions. There are several suppliers
30 of high oleic RBD oils in the USA and overseas. RBD oil useful as a starting material for further processing may be obtained from SVO Specialty Products, Eastlake OH, and

- 9 -

Cargill Corp., Minneapolis MN. The oil manufacturer goes through an elaborate process to obtain RBD oil during which all nonoily components (gums, phospholipids, pigments etc.) are removed. Further steps may involve winterization (chilling) to remove saturates, and stabilization using nontoxic additives. The processes for converting oil to RBD oil are described in Bailey's Industrial Oil and Fat Products, Vols. 1, 2 & 3, Fourth Edition 1979 John Wiley & Sons and in Bleaching and Purifying Fats and Oils by H.B.W. Patterson, AOCC Press, 1992, which are incorporated herein by reference.

RBD oils are further processed according to the present invention in order to yield an oil with the physical properties as defined herein. The purification of the as received oil designated RBD oil is necessary because trace polar compounds and acidic materials still remain in the oil, making it unfit as an electrical fluid. The purification process of the present invention uses clay treatment which involves essentially a bleaching process using neutral clay. RBD oil is combined with 10% by weight clay and mixed for at least about 20 minutes. It is preferred if the oil is heated to about 60-80°C. It is preferred if the mixture is agitated. The clay particles are removed subsequently by a filter press. Vacuum conditions or a neutral atmosphere (by nitrogen) during this process prevent oxidation. Slightly stabilized oil is preferable. More stabilizer is added at the end of the process. The purity is monitored by electrical conductivity, acidity and dissipation factor measurement. Further treatment by deodorization techniques is possible but not essential. The polar compounds that interfere most with electrical properties are organometallic compounds such as metallic soaps, chlorophyll pigments and so on. The level of purification needed is determined by the measured properties and the limits used. An alternative embodiment provides passing RBD oil through a clay column. However, stirring with clay removes trace polar impurities better.

- 10 -

than passing through a clay column. In preferred embodiments, neutral Attapulgite clay, typically 30/60 mesh size, is used in a ratio of 1-10% clay by weight. In some embodiments, clay particles are removed using filters, preferably paper filters with a pore size of 1-5 μm . The clay is preferably mixed with hot oil and agitated for several minutes, after which the clay is filtered off using filters. Paper or synthetic filter sheets may be used if a filter separator is used. The filter sheets are periodically replaced.

Electrical insulation fluids of the invention comprise the triglyceride composition of the invention and may further comprise one or more additives. Additives include oxidation inhibitors, copper deactivators and pour point depressors.

Oxidation inhibitors may be added to the oils. Oxidation stability is desirable but in sealed units where there is no oxygen, it should not be critical. Commonly used oxidation inhibitors include butylated hydroxy toluene (BHT), butylated hydroxy anisole (BHA) and mono-tertiary butyl hydro quinone (TBHQ). In some embodiments, oxidation inhibitors are used in combinations such as BHA and BHT. Oxidation inhibitors may be present at levels of 0.1-3.0%. In some preferred embodiments, 0.2% TBHQ is used. Oxidation stability of the oil is determined by AOM or OSI methods well known to those skilled in the art. In the AOM method, the oil is oxidized by air at 100°C and the formation of peroxide is monitored. The time to reach 100 milliequivalents (meq) or any other limit is determined. The higher the value, the more stable the oil is. In the OSI method, the time to reach an induction period is determined by the measurement of conductivity.

Pour points depressants may also be added if low pour points are needed. Commercially available products can be used which are compatible with vegetable-based oils. Only low percentages, such as 2% or below, are needed normally to bring down the pour point by 10 to 15°C. In

- 11 -

some embodiments, the pour point depressant is polymethacrylate (PMA).

Since copper is always present in the electrical environment, another type of additive is copper deactivators. Copper deactivators such as benzotriazole derivatives are commercially available. The use of these in small, such as below 1%, may be beneficial in reducing the catalytic activity of copper in electrical apparatus. In some embodiments, the electrical insulation fluid contains less than 1% of a copper deactivator. In some embodiments, the copper deactivator is a benzotriazole derivative.

In some embodiments, the pour point may be further reduced by winterizing processed oil. Essentially, the oils are winterized by lowering the temperature to near or below 0°C and removing solidified components. The winterization process may be performed as a series of temperature reductions followed by removal of solids at the various temperature. In some embodiments, winterization is performed by reducing the temperature serially to 5°, 0° and -12°C for several hours, and filtering the solids with diatomaceous earth.

In some embodiments, the electrical insulation fluid of the invention that comprises at least 75 percent triglyceride composition of the invention as described above further comprises about 0.1-5% additives and then up to about 25% other insulating fluids such as mineral oil, synthetic esters, and synthetic hydrocarbons. In some embodiments, the electrical insulation fluid comprises 1-24% of insulating fluids selected from the group consisting of mineral oil, synthetic esters, synthetic hydrocarbons and combination of two or more of such materials. In some embodiments, the electrical insulation fluid comprises 5-15% of insulating fluids selected from the group consisting of mineral oil, synthetic esters, synthetic hydrocarbons and combination of two or more of such materials. Examples of mineral oils include poly alpha olefins. An example of a mineral oil which may be used as part of the present

- 12 -

invention is RTEmp, Cooper Power Fluid Systems. Examples of synthetic esters include polyol esters. Commercially available synthetic esters which can be used as part of the invention include those sold under the trade names MYDEL, REODEC and ENVIROTEMP 200, Cooper Power Fluid Systems. In some preferred embodiments, the electrical insulation fluid comprises at least 85% of the triglyceride composition of the invention. In some preferred embodiments, the electrical insulation fluid comprises at least 95% of the triglyceride composition of the invention.

The present invention relates to an electrical apparatus which comprises the electrical insulation fluid of the invention. The electrical apparatus may be an electrical transformer, an electrical capacitor or an electrical power cable. U.S. Patent Number 4,082,866, U.S. Patent Number 4,206,066, U.S. Patent Number 4,621,302, U.S. Patent Number 5,017,733, U.S. Patent Number 5,250,750, and U.S. Patent Number 5,336,847, which are referred to above and incorporated herein by reference describe various applications of electrical insulation fluids for which the electrical insulation fluid of the invention may be used. In addition, U.S. Patent Number 4,993,141 issued February 19, 1991 to Grimes et al., U.S. Patent Number 4,890,086 issued December 26, 1989 to Hill, U.S. Patent Number 5,025,949 issued June 25, 1991 to Adkins et al., U.S. Patent Number 4,972,168 issued November 20, 1990 to Grimes et al., U.S. Patent Number 4,126,844, and U.S. Patent Number 4,307,364 issued December 22, 1981 to Lanoue et al., which are each hereby incorporated herein by reference contain descriptions of various electrical apparatuses in which the electrical insulation fluid of the invention may be used. In some preferred embodiments, the electrical apparatus for the invention is a transformer, in particular, a power transformer or a distribution transformer.

EXAMPLES**Example 1.**

Several high oleic oils were further purified and stabilized according to the present invention to make them electrically suitable. Electrical tests showed that such purified oils had properties similar to currently used high temperature fluids in distribution transformers. Table 1 compares the properties of the purified oils of the present invention with currently used fluids.

Table 1

Comparison of Purified Vegetable Oils with High Temperature Fluids Used in Transformers

	High Oleic Veg. Oil	High Temp. Mineral Oil ^a	Synthetic Ester Fluid ^b
Dielectric Strength, KV/100 mil gap	42.4	40-45	50
Dissipation Factor, % at 25°C	0.02	0.01	0.1
Neutr. No. mg KOH/g	0.05	-	0.03
Electrical Conductivity pS/m, 25°C	0.25-1.0	(0.1 to 10)*	(5.0)*
Flash Point	328°C	275-300°C	257°C
Pour Point	-28°C	-24°C	-48°C

^a RTEmp, Cooper Power Fluid Systems

^b Polyol Esters

* deduced from resistivity

The properties listed for the high oleic oil are for purified oils with no additives.

- 14 -

Example 2

The purification of the as received oil designated RBD oil (refined, bleached and deodorized) is necessary because trace polar compounds and acidic materials still remain in the oil, making it unfit as an electrical fluid. The purification we attempted involved clay treatment as follows: approximately 1 gal. of the RBD oil was treated with 10% Attapulgite clay. Oil was produced with electrical conductivity of less than 1 pS/m. The attapulgite treated oil showed conductivities as low as 0.25 pS/m. Commercial grade oils had conductivities in the range of 1.5 to 125 pS/m. Conductivity below 1 pS/m (or resistivity above 10^{14} ohm.cm) is desired for electrical grade oil. Other indicators of purity are dissipation factor and neutralization number (acid number). Dissipation factor is a measure of electrical losses due to conduction caused by conducting species, usually organometallic trace components, and should be below 0.05% at room temperature. The clay treated oils had dissipation factor of 0.02%. Untreated RBD oils had DF ranging from 0.06% to 2.0%.

Example 3

Oxidation stability tests were conducted on treated and untreated oil samples using ASTM and AOCS methods. The untreated and treated RBD oils failed the tests. Oxidation inhibitors were added to the oils and the tests were repeated. Several oxidation inhibitors were tested: BHT (Butylated Hydroxy Toluene, BHA (Butylated Hydroxy Anisole) and TBHQ (mono-Tertiary Butyl Hydro Quinone) in 0.2% by weight in oil. In the AOCS method used (Cd 12.57) 100 ml samples are bubbled with air at 100C, and the peroxide formation was measured at several time intervals. Hours to reach 100 meq of peroxide were noted. Since copper is always present in the electrical environment, all oil samples had copper wire placed in them. With no additive, the time to reach the limit was 18 hours; with additive (0.2%), the times were 100 hours for BHT + BHA. With TBHQ, even after 400 hours, the peroxide value

- 15 -

reached only 8.4 meq. TBHQ proved to be the best antioxidant of the three. Without an oxidation inhibitor the oils upon oxidation would produce hydroperoxide which is then converted to acids, alcohols, esters, aldehydes, ketones and polymer structures. Most electrical apparatus that use a fluid insulation operate in low oxygen or oxygen-free environment, so the concern over oxidation is not great.

Example 4

- 10 The pour point of the treated oil was typically -25°C. To lower the pour point further, the treated oils were winterized at 5°, 0° and -12°C for several hours, and the solids that separated were filtered with diatomaceous earth. The lowest pour point reached so far was -38°C,
15 close to the specified value of -40°C for transformer oil. Further lowering is possible by extended winterization. Another approach is by the use of pour point depressants such as PMA (polymethacrylate) which has been used for mineral oil.



Claims

1. A high oleic acid triglyceride composition comprising fatty acid components of
- 5 at least 75% oleic acid
less than 10% diunsaturated fatty acid
component C16-C22;
less than 3% triunsaturated fatty acid C16-C22 component; and
less than 8% saturated fatty acid component
- 10 C16-C22; and
wherein said composition is further characterized by the properties of:
- a dielectric strength of at least 35 KV/100 mil gap
- 15 a dissipation factor of less than 0.05% at 25°C
- acidity of less than 0.03 mg KOH/g
electrical conductivity of less than 1 pS/m at 25°C
- 20 a flash point of at least 250°C and
a pour point of at least -15°C.
2. The high oleic acid triglyceride composition of claim 1 comprising fatty acid components of
- 25 at least 75% oleic acid
less than 10% linoleic acid
less than 3% linolenic acid
less than 4% stearic acid, and
less than 4% palmitic acid.
3. The high oleic acid triglyceride composition of claim 2 wherein said composition is further characterized by the properties of:
- 30 a dielectric strength of at least 40 KV/100 mil gap,



- 17 -

a dissipation factor of less than 0.02% at 25°C,

acidity of less than 0.02 mg KOH/g,

electrical conductivity of less than .25 pS/m

5 at 25°C,

a flash point of at least 300°C, and

a pour point of at least -20°C.

4. The high oleic acid triglyceride composition of claim 3 wherein said composition is further characterized by
10 a pour point of at least -40°C.

5. The high oleic acid triglyceride composition of claim 1 comprising fatty acid components of

at least 75% oleic acid

less than 10% linoleic acid

15 less than 3% linolenic acid

less than 4% stearic acid, and

less than 4% palmitic acid

wherein said composition is further characterized by the properties of:

20 a dielectric strength of at least 40 KV/100 mil gap,

a dissipation factor of less than 0.02% at 25°C,

acidity of less than 0.02 mg KOH/g,

25 electrical conductivity of less than .25 pS/m at 25°C,

a flash point of at least 300°C, and

a pour point of at least -20°C.

6. The high oleic acid triglyceride composition of claim 5 wherein said composition is further characterized by
30 a pour point of at least -40°C.

- 18 -

7. An electrical insulation fluid comprising:
at least 75% of the high oleic acid
triglyceride composition of claim 1
0.1-3% antioxidant additive.

5 8. The electrical insulation fluid of claim 7 wherein
said antioxidant additive is selected from the group
consisting of butylated hydroxy toluene, butylated hydroxy
anisole and mono-tertiary butyl hydro quinone.

9. The electrical insulation fluid of claim 7 wherein
10 said antioxidant additive is mono-tetra hydro quinone.

10. The electrical insulation fluid of claim 9
comprising up to 2% mono-tetra hydro quinone.

11. The electrical insulation fluid of claim 7
comprising at least 94% of the high oleic acid triglyceride
15 composition.

12. The electrical insulation fluid of claim 7 further
comprising a pour point depressant additive.

13. The electrical insulation fluid of claim 12
wherein said pour point depressant is polymethacrylate.

20 14. The electrical insulation fluid of claim 7 further
comprising a copper deactivator additive, said electrical
insulation fluid comprising less than 1% of said copper
deactivator.

15. The electrical insulation fluid of claim 7 wherein
25 said copper deactivator is a benzotriazole derivative.

16. The electrical insulation fluid of claim 7 further
comprising up to 25% of mineral oil, synthetic esters,
synthetic hydrocarbons and combinations thereof.



17. An electrical apparatus comprising the electrical insulation fluid of claim 7.

18. The electrical apparatus of claim 17 wherein said apparatus is an electrical transformer, an electrical capacitor or an electrical power cable.

19. A process for preparing the high oleic acid triglyceride composition of claim 1 comprising the steps of:

mixing 10 parts refined, bleached and deodorized high oleic acid triglyceride with 1 part or less by weight neutral clay to form a mixture

maintaining said mixture for at least about 20 minutes, and

filtering said mixture to remove said clay.

20. The process of claim 19 wherein said clay is 30/60 mesh size clay.





-20-

REPLACEMENT SHEET	
REPLACEMENT SHEETS SG	
☐ Description :	paged to paged
☒ Claim(s) :	paged 20. to paged 22.
☐ Drawing(s) :	paged to paged
☐ Abstract :	paged to paged
DATE OF RECEIPT 26 MAR 1999	

21. An electrical transformer comprising a tank, an electrical component that comprises a core and coils, and insulating fluid within said tank and covering said electrical component, wherein said insulating fluid comprises:

a) at least 75% of a high oleic acid triglyceride composition comprising fatty acid components of:

- at least 75% oleic acid;
- less than 10% diunsaturated fatty acid component C16-C22;
- less than 3% triunsaturated fatty acid C16-C22 component;
- less than 8% saturated fatty acid component C16-C22; and

b) 0.1-3% antioxidant additive;

wherein said insulating fluid is characterized by the properties of:

- a dielectric strength of at least 35 KV/100 mil gap;
- a dissipation factor of less than 0.05% at 25°C;
- acidity of less than 0.03 mg KOH/g; and,
- electrical conductivity of less than 1 pS/m at 25°C.


22. The electrical transformer of claim 21 wherein said insulating fluid comprises a high oleic acid triglyceride composition that comprises fatty acid components of:

- at least 75% oleic acid;
- less than 10% linoleic acid;
- less than 3% linolenic acid;
- less than 4% stearic acid; and
- less than 4% palmitic acid.

23. The electrical transformer of claim 22 wherein said insulating fluid is further characterized by the properties of:

- a dielectric strength of at least 40 KV/100 mil gap;
- a dissipation factor of less than 0.02% at 25°C;
- acidity of less than 0.02 mg KOH/g;
- electrical conductivity of less than .25 pS/m at 25°C;
- a flash point of at least 300°C; and
- a pour point of at least -20°C.

24. The electrical transformer of claim 23 wherein said insulating fluid is further characterized by a pour point of at least -40°C.

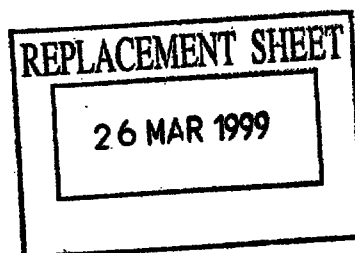



25. The electrical transformer of claim 21 wherein said insulating fluid is further characterized by the properties of:

a dielectric strength of at least 40 KV/100 mil gap;
a dissipation factor of less than 0.02% at 25°C;
acidity of less than 0.02 mg KOH/g;
electrical conductivity of less than .25 pS/m at 25°C;
a flash point of at least 300°C; and
a pour point of at least -20°C.

26. The electrical transformer of claim 21 wherein said insulating fluid comprises at least 94% of the high oleic acid triglycende composition.

27. The electrical transformer of claim 21 wherein said insulating fluid further comprises a pour point depressant additive.

28. The electrical transformer of claim 27 wherein said pour point depressant additive is polymethacrylate.

29. The electrical transformer of claim 21 wherein said insulating fluid further comprises less than 1% of a copper deactivator additive.

30. The electrical transformer of claim 29 wherein said copper deactivator is a benzotriazole derivative.

31. The electrical transformer of claim 21 wherein said insulating fluid further comprises up to 25% of mineral oil, synthetic esters, synthetic hydrocarbons or combinations thereof.

32. The electrical transformer of claim 31 wherein said insulating fluid further comprises 3-20% mineral oil, synthetic esters and/or synthetic hydrocarbons.

33. The electrical transformer of claim 32 wherein said insulating fluid further comprises 5-15% mineral oil, synthetic esters and/or synthetic hydrocarbons.

34. The electrical transformer of claim 33 wherein said insulating fluid further comprises 5-15% synthetic esters and/or synthetic hydrocarbons.

35. The electrical transformer of claim 21 wherein said insulating fluid comprises 0.2-2.0% of a combination of one or more antioxidant additives and metal deactivator additive, said combination having a ratio of about 5 parts antioxidant additives to about 1 part metal deactivator additive.

REPLACEMENT SHEET

26 MAR 1999



36. The electrical transformer of claim 35 wherein said insulating fluid comprises 0.5-1.0% of a combination of one or more antioxidant additives and metal deactivator additive.

37. The electrical transformer of claim 21 wherein said insulating fluid comprises 0.5-1.0% of a combination of one or more antioxidant additives and metal deactivator additive, said combination having a ratio of about 4 parts antioxidant additives to about 1 part metal deactivator additive.

38. The electrical transformer of claim 21 wherein said insulating fluid comprises 0.5% of a combination of one or more antioxidant additives and metal deactivator additive.



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

RTM PLS copy

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H01B 3/20	A1	(11) International Publication Number: WO 97/49100 (43) International Publication Date: 24 December 1997 (24.12.97)
(21) International Application Number: PCT/US97/10045 (22) International Filing Date: 11 June 1997 (11.06.97) (30) Priority Data: 08/665,721 18 June 1996 (18.06.96) US (71) Applicant: ABB POWER T & D COMPANY INC. [US/US]; 1021 Main Campus Drive, Raleigh, NC 27606 (US). (72) Inventors: OOMMEN, Thottathil, V.; 4808 Kaplan, Raleigh, NC 27606 (US). CLAIBORNE, C., Clair; 925 Hall Avenue, Sharon, PA 16146 (US). (74) Agents: NORRIS, Norman, L. et al.; Woodcock Washburn Kurtz Mackiewicz & Norris, 46th floor, One Liberty Place, Philadelphia, PA 19103 (US).	(81) Designated States: AU, CA, JP, MX, SG, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i>	

(54) Title: **HIGH OLEIC ACID ELECTRICAL INSULATION FLUIDS AND METHOD OF MAKING THE SAME**

(57) Abstract

High oleic acid triglyceride compositions that comprise fatty acid components of at least 75 % oleic acid, less than 10 % diunsaturated fatty acid component; less than 3 % triunsaturated fatty acid component; and less than 8 % saturated fatty acid component; and having the properties of a dielectric strength of at least 35 KV/100 mil gap, a dissipation factor of less than 0.05 % at 25 °C, acidity of less than 0.03 mg KOH/g, electrical conductivity of less than 1 pS/m at 25 °C, a flash point of at least 250 °C and a pour point of at least -15 °C are disclosed. An electrical insulation fluid comprising the triglyceride composition is disclosed. Electrical apparatuses comprising the electrical insulation fluid and the use of electrical insulation fluid to provide insulation in electrical apparatuses are disclosed. A process for preparing the high oleic acid triglyceride composition is disclosed.