



(51) International Patent Classification:  
*A61F 2/16* (2006.01)

(21) International Application Number:  
PCT/NL2024/050621

(22) International Filing Date:  
15 November 2024 (15.11.2024)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:  
2036285 16 November 2023 (16.11.2023) NL

(71) Applicant: **OPHTEC B.V.** [NL/NL]; Schweizerlaan 15,  
9728 NR Groningen (NL).

(72) Inventors: **BIEMOLD, Peter**; p/a Schweizerlaan 15, 9728  
NR Groningen (NL). **DE JEER, Leonardus Theodorus  
Henry**; p/a Schweizerlaan 15, 9728 NR Groningen (NL).


**ELDERING, Gustaaf Leonard**; p/a Schweizerlaan 15,  
9728 NR Groningen (NL).

(74) Agent: **VERDIJCK, Gerardus Johannes Cornelis**;  
Bezuidenhoutseweg 57, 2594 AC The Hague (NL).

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM,  
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,  
HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG,  
KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY,  
MA, MD, MG, MK, MN, MU, MW, MX, MY, MZ, NA,  
NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO,  
RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH,  
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS,  
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, CV,

(54) Title: INTRAOCULAR LENS CONFIGURED TO BE INSERTED INTO AN EYE AND METHOD FOR MANUFACTURE  
THEREOF

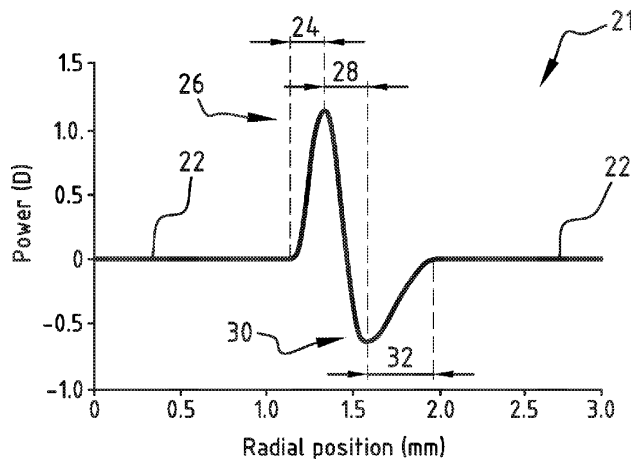

**FIG. 3B**

(57) Abstract: The invention relates to an intraocular lens configured to be inserted into an eye and method for manufacture thereof. The lens according to the invention comprises: an optical element of a flexible optical material; and at least one haptic element which is connected to the optical element and which is provided with a connecting part configured to connect the lens to an eye part, wherein the optical element is provided with a lens power profile, preferably a continuous lens power profile, wherein the profile is provided outside the centre of the lens, as seen in radial direction of the lens, with at least one increasing profile over a first radial distance and at least one decreasing profile over a second radial distance.

[Continued on next page]



GH, GM, KE, LR, LS, MW, MZ, NA, RW, SC, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))