



(43) International Publication Date
26 November 2009 (26.11.2009)

(10) International Publication Number
WO 2009/143214 A1

(51) International Patent Classification:
E05C 19/08 (2006.01)

(21) International Application Number:
PCT/US2009/044628

(22) International Filing Date:
20 May 2009 (20.05.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/054,577 20 May 2008 (20.05.2008) US

(71) Applicant (for all designated States except US): **MAS-
TER LOCK COMPANY LLC** [US/US]; 137 W. Forest
Hill Avenue, P.O. Box 927, Oak Creek, WI 53154 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **BROJANAC,
Michael** [US/US]; W201 N16659 Hemlock St., Apt.4,
Jackson, WI 53047-9437 (US).

(74) Agents: **RUNDELLI, Raymond** et al.; Calfee, Halter &
Griswold LLP, 800 Superior Avenue, Cleveland, OH
44114-2688 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ,
EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG,
SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR),
OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML,
MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) Title: SAFETY LOCKOUT HASP

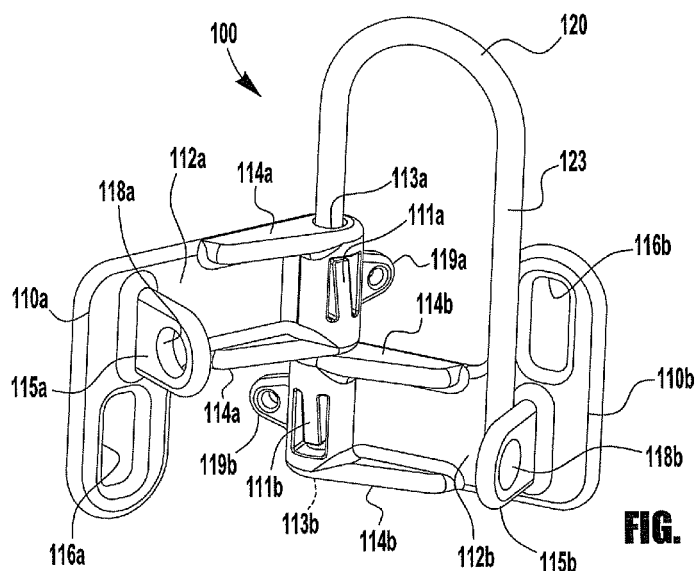


FIG. 4A

(57) Abstract: A safety lockout hasp includes a shackle member having a first shackle leg and a second shackle leg, and first and second clasp members pivotally secured to the first shackle leg. The first clasp member includes an apertured flange, and the second clasp member includes a cutout portion positioned to receive the apertured flange therethrough when the first and second clasp members are in a closed position in which at least one of the first and second clasp members engages the second shackle leg. When the first and second clasp members are in the closed position and a lockable retaining member is inserted through a lockout aperture in the apertured flange, withdrawal of the apertured flange from the cutout portion is prevented, thereby securing the first and second clasp members in the closed position.

Published:

— *with international search report (Art. 21(3))*