

Title: CONTROL MECHANISM FOR A CHAIR

FIELD OF THE INVENTION

This invention relates to a control mechanism for a seating unit. In one embodiment, this invention relates to an actuating mechanism including a button which may be positioned in the arm of a chair, such as a pedestal-type office chair, for adjusting the inclination from the horizontal of the seat member of the chair. In another embodiment, this invention relates to an actuating mechanism including a button which may be positioned in the arm of a chair, such as a pedestal-type office chair, for adjusting the inclination of the chair back member. In another embodiment, the button is movable between a first position and a second position and may be retained in both the first position and the second position.

BACKGROUND OF THE INVENTION

Many chairs which are used in a commercial environment, such as office chairs, chairs for computer data entry operators and chairs for operators of industrial plant process control equipment, are adjustable so that the chair will provide comfortable support to the user for an extended period of time. Accordingly, such chairs typically have a mechanism for adjusting the height of the chair. In addition, the chairs may include a mechanism for permitting the back support member of the chair to tilt relative to the seat member. Further, the chairs may provide a mechanism to permit the seat member of the chair to tilt so that the chair may be rocked backwards and/or forwards.

Typically, office chairs comprise a wheeled base, the seat member of the chair (which may include a back rest member) and a support leg extending between the wheeled base and the seat member. The height adjustment mechanism may employ a

- 2 -

telescoping pneumatic cylinder which forms a part of, or may consist of, the support leg. These cylinders have a valve release pin provided thereon. The cylinder is generally in a locked condition but, when the valve release pin is depressed, the cylinder is
5 unlocked typically permitting it to telescopically extend upwardly due to the force exerted by the pressurized fluid in the cylinder or contract downwardly due to, for example, a user sitting in the chair.

One mechanism which has been utilized to provide a tilt mechanism for the seat member of a chair comprises mounting the
10 seat member on the support leg. A spring is provided so as to bias the seat member to the horizontal position. When the user leans backwardly in the chair, the user exerts a force greater than the biasing force of the spring thus causing the seat member to tilt rearwardly. An arm member positioned under the seat member
15 may be used to lock the chair into the at rest, horizontal position. One disadvantage with this design is that the chair may not be fixed in an inclined position. Accordingly, if the user wishes to maintain the chair in an inclined position, they must continuously exert pressure against the spring.

20 Buchacz (United States patent no. 5,024,484) discloses an adjustable sitting device. The seat and/or back rest member of this device are turnable about an axis that is essentially coincident with an imaginary axis through the hip joints of the user. Slide members are provided so that the seat and back rest members of the chair are
25 mounted for slidable movement with respect to each other. Movement of these members is controlled by locking means which interacts with the slide members and a gas cylinder.

Ishida (United States patent no. 4,383,714) discloses a rocking movable chair. The chair has a leg portion on which is mounted a
30 circular arc surface. The seat member is mounted for travel along the circular arc surface. A spring is provided to bias the seat member in one direction during the rocking movement. A locking

- 3 -

device utilizing a gas cylinder is provided to lock the rocking movement at a desired position.

Meiller et al (United States patent no. 4,743,065) discloses an office chair, the back rest member of which and the seat member of which may be adjusted by means of gas spring unit. Meiller et al discloses a locking member which utilizes a single actuating lever to adjust the inclination of the back rest member as well as the seat member.

Various control linkages for height adjustment mechanisms are known in the art. Examples of these include Kuhn et al (United States Patent No. 5,069,496), Knapp (United States Patent No. 4,408,800), Slabon et al (United States Patent No. 4,076,308), Wirges et al (United States Patent No. 4,072,288), Knoblauch et al (United States Patent No. 4,373,692) and Lai (United States Patent No. 5,222,783).

Numerous means have been used to control the inclination of the chair back member. These include various biasing means as well as the use of pneumatic cylinders. See for example Meiller et al (United States Patent No. 4,743,065), Lei et al (United States Patent No. 5,137,330), Kuhn et al (United States Patent No. 5,069,496), Knapp (United States Patent No. 4,408,800), Simpson (United States Patent No. 4,681,369), Lai (United States Patent No. 5,222,783), Slabon et al (United States Patent No. 4,076,308) and Hiramatsu (United States Patent No. 3,284,135).

Generally with the foregoing devices, the locking devices are adjusted by a lever or other mechanism which is positioned beneath the seat of the chair. Accordingly, the user must extend their arm downwardly and then transversely to a position underneath the seat to grasp the lever so that they can actuate the mechanism. This operation tends to be difficult particularly if the chair has a large, bulky arm. Since the use of these devices typically includes a biasing means to bias a chair to a preset position, the

- 4 -

operator must move the actuating lever to the actuating position and hold the lever in that position while sitting in the chair so as to set the chair in the desired position. As this may require the operator to bend or stoop over, it is difficult to set the inclination of the chair accurately. This is also problematic if the operator has a back problem which prevents such movement.

Nelson (United States patent no. 4,595,237) discloses an actuating control for a seat height adjustment mechanism. The mechanism of Nelson uses a pivotally mounted lever positioned on the bottom of the seat number. Nelson still requires users to extend their arm downwardly beneath the seat to actuate the lever.

SUMMARY OF THE PRESENT INVENTION

In accordance with one embodiment of the instant invention, there is provided an actuator apparatus for actuating a positioning linkage including cylinder means in a seating unit receiving the actuator apparatus. The actuator apparatus comprises a housing adapted for mounting in the arm of a seating unit; button means receivable in the housing and moveable longitudinally between a first position and a second position, the button means including locking means for alternately maintaining the button means in the first and second positions; actuating means for actuating cylinder means having a stationary portion and a moveable portion; flexible cable means having a first end connected to the button means and a second end operatively connected to the actuating means, whereby, when the button means is moved from the first position to the second position, the actuating means is actuated so that the moveable portion of the cylinder means may be adjusted relative to the stationary portion, and when the button means is moved from the second position to the first position, the moveable portion of the cylinder means is fixed relative to the stationary portion.

This Sheet Has Been Replaced

- 5 -

The cylinder means is preferably a non-pressurized cylinder (i.e. the fluid in the cylinder is not at an elevated pressure). The button means may comprise a longitudinally extending shaft member and the locking means may comprise first engagement means positioned on the shaft and second engagement means provided in the housing for engaging the first engagement means. Preferably, the housing has a longitudinally extending opening having an inner surface and the second engagement means is provided on the inner surface whereby movement of the button from the first position to the second position causes the first engagement means to undergo a rotational movement to alternately secure the button in the first and second positions.

In one embodiment, the seating unit comprises a support member; a seat member pivotally mounted on the support member; an arm rest member, the arm rest member including a housing; button means receivable in the housing and moveable longitudinally between a first position and a second position, the button means including locking means for alternately maintaining the button means in the first and second positions; a cylinder having actuating means and operatively connected to the seat member for adjustment of the inclination thereof; and, flexible cable means having a first end connected to the button means and a second end operatively connected to the actuating means whereby, when the button means is moved from the first position to the second position, the actuating means is actuated so that the inclination of the seat member may be adjusted and when the button means is moved from the second position to the first position, the inclination of the seat member is fixed.

In another embodiment a seating unit comprises a support member; a seat member pivotally mounted on the support member; an arm rest member, the arm rest member including a housing; a cylinder having actuating means and operatively connected to the

- 6 -

seat member for adjustment of the inclination thereof, the cylinder having a telescopically extendable section, a stationary section and a valve release member moveable between a closed position in which the telescopically extendable section is fixed in position relative to the stationary section and an open position in which the telescopically extendable section is moveable relative to the stationary section, one of the telescopically extendable section and the stationary section is pivotally mounted on the support member and the other of the telescopically extendable section and the stationary section is pivotally mounted on the seat member, the cylinder extending upwardly from the support member to the seat member; actuating means operatively connected to the valve release member and movable between a first position, in which the valve release member is in the closed position, and a second position, in which the valve release member is in the open position; button means receivable in the housing and moveable longitudinally between a first position and a second position; and, flexible cable means having a first end connected to the button means and a second end operatively connected to the actuating means, whereby, when the button means is moved from the first position to the second position, the valve release member is moved to the open position so that the inclination of the seat member may be adjusted and when the button means is moved from the second position to the first position, the valve release member is moved to the closed position so that the inclination of the seat member is fixed.

In another embodiment a seating unit comprises a support member; a longitudinally extending seat member positioned on the support member; a back member pivotally mounted with respect to the seat member for movement between an upright position and a reclined position; an arm rest member, the arm rest member including a housing; button means receivable in the housing and

- 7 -

moveable longitudinally between a first position and a second position, the button means including locking means for alternately maintaining the button means in the first and second positions; a cylinder having actuating means and operatively connected to the back member for adjustment of the inclination thereof; and, flexible cable means having a first end connected to the button means and a second end operatively connected to the actuating means, whereby, when the button means is moved from the first position to the second position, the actuating means is actuated so that the inclination of the back member may be adjusted and when the button means is moved from the second position to the first position, the inclination of the back member is fixed.

In another embodiment a seating unit comprises a support member; a longitudinally extending seat member positioned on the support member; a back member pivotally mounted with respect to the seat member for movement between an upright position and a reclined position; an arm rest member, the arm rest member including a housing; button means receivable in the housing and moveable longitudinally between a first position and a second position; locking means for alternately maintaining the button means in the first and second positions; a cylinder having actuating means and operatively connected to the back member for adjustment of the inclination thereof; and, flexible cable means having a first end connected to the button means and a second end operatively connected to the actuating means, whereby, when the button means is moved from the first position to the second position, the actuating means is actuated so that the inclination of the back member may be adjusted and when the button means is moved from the second position to the first position, the inclination of the back member is fixed.

In the embodiment for adjusting the inclination of the seat member, one of the telescopically extendable section and the

- 8 -

stationary section is preferably pivotally mounted on the support member and the other of the telescopically extendible section and the stationary section is preferably pivotally mounted on the seat member. Further, the cylinder preferably extends upwardly from the support member to the seat member.

Preferably, the button means is positioned in a housing means and the button means travels inwardly into the housing means as the button means passes between the first and second positions (so as to undergo a inward translational movement). Further, it is also preferred that the force which is required to move the button means from the first position to the second position is from about 5 to about 10 pounds and, more preferably, the force is about 8 pounds. The distance which the button travels inwardly may be up to 5/8 inch and, more preferably, the distance is about 1/4 inch.

Further, the actuating means may comprise an arm member pivotally mounted with respect to the valve release member, the arm member having a moment arm of sufficient length to permit the button means to move from the first position to the second position by the force applied through the finger of a user when the user is seated in the chair. The cylinder is a fluid filled cylinder. The fluid may be a gas (in which case the cylinder is a pneumatic cylinder which is also known in the industry as a gas damper). More preferably, the fluid is a non-compressible fluid such as oil. Preferably, the cylinder is a non-pressurized cylinder (i.e. the pressure of the fluid in the cylinder is sufficiently low so that the piston of the cylinder will not move without an external force applied thereto when the valve of the cylinder is opened).

In a further embodiment, the button means may include the locking means for alternately maintaining button means in the first position and then in the second position. Accordingly, when the button means is in the first position, the valve release member

- 9 -

is in the closed position and accordingly the inclination of the chair is fixed. When the button is in the second position, the valve release member is open and the user may rock backwards and forwards in the chair continuously adjusting the inclination of the seat member or the inclination of the back rest member. The locking means comprises a member which forms part of the apparatus for actuating the positioning linkage and is therefore actuated by movement of the button. Preferably, the locking means forms part of the button means.

One advantage of the present invention is that the infinite tilt adjustment mechanism of the chair may be easily operated by the user. In particular, the button is conveniently located for the user so that the inclination of the seat member and/or the chair back member may be easily set by the user while seated in their normal work position. Thus, the operator may easily utilize their legs to tilt the seat member backwards while comfortably seated in the chair. A further advantage is that the user may operate the tilt mechanism by applying only a minimal pressure with one finger of their hand. Further, the tilt mechanism may be locked in any desired position, as opposed to preset positions. Accordingly, the user may adjust the inclination of the seat member of the chair to precisely match their needs.

A further advantage is that the user may operate the chair while in a regular seated position. As will be appreciated, a person whose back permits them to have only limited movement may be able to easily set the chair back to the desired inclination.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

These and other advantages of the instant invention will be more fully and completely understood by reference to the following drawings of a preferred embodiment of the invention in which:

- 10 -

Figures 1a and 1 b are schematic representations of a use of the two position button according to the instant invention;

Figure 1c is a cross section along the line 1-1 in Figure 1b of an alternate actuator;

5 Figure 2 is an enlargement of the button according to the instant invention showing the button in the closed position;

Figure 3 is an enlargement of the button according to the instant invention showing the button in the open position;

Figure 4 is a cross section along the line 4-4 in Figure 2;

10 Figure 5 is a cross section along the line 5-5 in Figure 3;

Figure 6 is an exploded view of Figure 4;

Figure 7a is a top plan view of the outer member shown in Figure 6;

15 Figure 7b is an elevational view of the outer member shown in Figure 6;

Figure 8a is a top plan view of the inner member shown in Figure 6;

Figure 8b is an elevational view of the inner member shown in Figure 6;

20 Figure 9a is a top plan view of the housing shown in Figure 6;

Figure 9b is a cross sectional view along the line 9-9 in Figure 6;

25 Figure 10 is a perspective view of a chair according to the instant invention;

Figure 11 is a side view of the chair of Figure 10 showing the seat member adjustment mechanism in which the seat member of the chair is in the horizontal position;

30 Figure 12 is a side view of the chair of Figure 10 showing the seat member adjustment mechanism in which the seat member of the chair is in an inclined position;

- 11 -

Figure 13 is an enlarged front view of detail A of Figure 10 in which the seat member of the chair is in the horizontal position;

Figure 14 is an enlarged front view of detail A of Figure 10 in which the seat member of the chair is in an inclined position;

5 Figure 15 is an enlargement of detail E of Figure 10;

Figure 16 is a side view of the chair of Figure 10 showing the chair back member adjustment mechanism in which the chair back is in an upright position; and,

10 Figure 17 is a side view of the chair of Figure 10 showing the chair back member adjustment mechanism in which the chair back is in an inclined position.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The two position button disclosed herein may be used to actuate different mechanisms of a seating unit such as a pedestal chair. For example, the cylinder may form part of a chair and may be used to adjust the height of the chair, the inclination of the seat member of the chair or the inclination of the back rest member of the chair with respect to the seat member of the chair. In accordance with one embodiment, the button is preferably used to actuate a non-pressurized cylinder (e.g. an oil filled cylinder). Preferably, the cylinder is used to adjust the inclination of the seat member of the chair or the inclination of the back rest member of the chair with respect to the seat member of the chair. Due to its construction, the button is preferably positioned in the arm of a chair for ease of use by the user.

Figures 1a and 1b show a schematic of the two position button when used in this environment. As shown therein, button means 10 is used to actuate cylinder 12 via cable 14. Cable 14 may comprise a braided wire 16 which is positioned within a plastic sheet or the like to ensure free movement of wire 16.

- 12 -

Referring to Figures 2 and 3, button means 10 is shown in its first (closed) position and its second (open) position. Button means 10 may comprise button 20 and transversely extending member 22. Transversely extending member 22 extends outwardly from rear surface 24 of button 20. Transversely extending member 22 extends through opening 30 (see Figure 9a) in housing 26. Transversely extending member 22 has distal end 28.

Housing 26 may have a first arm 32 and a second arm 34. Cam member 36 is pivotally mounted by pivot pin 38 to the distal end of first arm 32. Cable 14 has a shoulder member 40 and the end of wire 16 connected to button means 10 has an enlarged end 42. Cam member 36 is provided with an opening (not shown) through which wire 16 passes. Enlarged end 42 is retained against surface 44 of cam member 36 such as by providing a recess in which enlarged end 42 is seated. Second arm member 34 has an opening (not shown) through which wire 16 passes. Shoulder member 40 abuts against surface 46 of second arm 34.

It will be appreciated that wire 16 may be retained in cam member 36 by any means known in the art. Wire 16 may be fixedly attached thereto (e.g. by welding, gluing or the like). Alternately, wire 16 may be removably connected thereto for ease of repair, such as by the means described above, in case wire 16 should break.

Button means 10 is preferably associated with a locking means to maintain button 20 in each of the first and second positions into which it may be moved. The locking means preferably comprises part of button means 10. For example, as shown in Figures 4 and 5, transversely extending member 22 comprises inner member 50 and outer member 52. Inner member 50 is slidably positioned in inner member 52. Inner member 50 comprises a cylindrically shaped longitudinally extending member 54 and engagement member 56. Similarly, outer member 52 comprises a longitudinally extending member 58 and engagement

- 13 -

member 60. Outer member 52 is hollow so as to define an opening 62 extending at least substantially therethrough. Inner member 50 and outer member 52 are sized so that longitudinally extending member 54 may be slidably received in opening 62.

5 Engagement member 56 has a toothed surface 64 positioned distal to distal 28. Toothed surface 64 has a plurality of crests 86 and a plurality of troughs 90 (see Figure 8b). Further, engagement member 56 has a plurality of protrusions 66 equidistantly spaced around engagement member 56.

10 Engagement member 60 of outer member 52 has a toothed surface 68 and a plurality of protrusions 70 equidistantly spaced around engagement member 60. Toothed surface 68 has a plurality of crests 88 and a plurality of troughs 92 (see Figure 7b). Protrusions 70 have a surface 71 positioned distal to toothed surface 68.

15 Housing 26 has an opening extending therethrough having an inner surface 72. Positioned on inner surface 72 are a plurality of first raised members 74 and a plurality of second raised members 76 which are spaced around inner surface 72. Members 74 and 76 define first channels 82 and second channels 84 which are
20 equidistantly spaced around inner surface 72. As best shown in Figure 9a, first and second raised surfaces are set out in sequence around inner surface 72 as follows. Starting at any particular point, a first raised member 74 is provided. Adjacent this, a second raised member 76 is provided. Adjacent thereto, another first raised
25 member 74 is provided. This sequence of members defines a second channel 84. This pattern is repeated in equidistance spacing around inner surface 72. Neighbouring first raised members 74 define first channels 82. As shown in Figure 9a, three such series may be provided.

30 The upper surface of first and second raised members 74 and 76 define a plurality of discrete cam surface 78. As best shown in Figure 9b, the cam surfaces 78 are circumferentially angled. Outer

- 14 -

member 80 is provided on housing 26 at a position opposed to button 20. As shown in Figure 9a, housing 26 has an opening 30 which extends therethrough. Outer member 80 defines an opening which is sized to slidably receive longitudinal member 58.

5 Inner member 50 is slidably mounted inside outer member 52. When inner member 50 is fully inserted into outer member 52, toothed surface 64 of inner member 50 engages toothed surface 68 of outer member 52. Toothed surfaces 64 and 68 are sized and shaped so that when inner member 50 is fully inserted into outer member
10 52, rotation of outer member 52 causes inner member 50 to rotate. When toothed surfaces 64 and 68 are spaced apart, inner and outer members 50 and 52 may independently rotate without causing the other member to rotate.

Longitudinally extending member 58 of outer member 52 is
15 sized so as to freely rotate in the opening provided in outer member 80. Accordingly, as shown in Figures 4 and 5, when button means 10 is assembled, inner member 50 is positioned inside outer member 52 and outer member 52 is positioned inside housing 26. A portion of outer member 52 extends through the opening provided in outer
20 member 80.

Protrusions 70 of outer member 52 are sized so as to permit engagement member 60 to be received within housing 26 as shown in Figure 5. Accordingly, the circumference of engagement member 60 (as measured around the circle defined by the outer surface of
25 protrusion 70), is less than the diameter of the opening in housing 26 defined by the inner surface of second raised members 76. Thus, protrusions 70 may be received in both first channels 82 and second channels 84.

Protrusions 66 of engagement member 56 define a circle
30 having a diameter smaller than the diameter defined by inner surface 72 of housing 26 but larger than the diameter defined by the inner surface of second raised members 76. Accordingly, protrusions

- 15 -

66 may be received in first channels 82 but not in second channels 84.

The operation of the two position button will now be described with reference to Figures 2 - 5. When button 20 is in the position shown in Figure 2, outer member 52 is fully inserted into housing 26 so that engagement member 60 is in contact with outer member 80 of housing 26. Further, inner member 50 is positioned in housing 26. Accordingly, each protrusion 70 is aligned with a channel 82 or 84 and each protrusion 66 is aligned with a first channel 82. In the position shown in Figure 4, toothed surfaces 64 and 68 do not fully engage. Instead, toothed surfaces 64 and 68 are slightly offset so that the crests of toothed surface 64 are positioned slightly forward of crests 88 of toothed surfaces 68.

When button 20 is pushed inwardly, towards the position shown in Figure 3, movement of button 20 towards housing 26 causes outer member 52 to travel inwardly into housing 26. When outer member 52 undergoes a translational inward motion, the contact between toothed surfaces 64 and 68 causes inner member 50 to undergo a similar translational movement. Accordingly, when button 20 is fully depressed, inner member 50 travels sufficiently far so that engagement member 56 is positioned outside housing 26. At this position, inner member 50 is freely rotatable within outer member 52. As will be appreciated by the discussion hereinafter, cam member 36 applies an opposed translational outward pressure to engagement member 56. This pressure causes toothed surface 64 of engagement member 56 to cam along toothed surface 68 until crests 86 are positioned in troughs 92 and, similarly, crests 88 are positioned in troughs 90. This motion causes inner member 50 to rotate around its axis with respect to housing 26. This rotation of inner member 50 with respect to housing 26 causes protrusions 66 to be out of alignment with first channels 82.

- 16 -

When button 20 is released by the user, the pressure applied to engagement member 56 by cam member 36 causes inner and outer members 50 and 52 to undergo a translational outward motion and button 20 accordingly moves outwardly to the position shown in Figure 3. As outer member 52 enters housing 26, lower surfaces 71 of protrusions 70 engage cam surfaces 78. Surfaces 71 cam along surfaces 78 until each protrusion 70 is aligned with either a first or second channel 82 or 84. At this position, outer member 52 may travel inwardly into housing 26 until the position shown in Figure 5 is achieved. As inner member 50 moves into housing 26, protrusions 66 engage cam surfaces 78. As cam surfaces 78 are inclined circumferentially inwardly into housing 26, continued pressure on engagement member 56 by cam member 36 causes toothed surface 64 to cam along cam surfaces 78, further rotating inner member 50 with respect to housing 26. This rotation of inner member 50 is terminated when protrusions 66 engage sides 75 of first raised members 74. This is the position shown in Figure 5. In this position, engagement between toothed surface 64 and cam surface 78 of second raised surface 76 prevents further inward motion of inner member 50 and accordingly the button is locked in the second position.

When it is desired to move the button to the first position (Figure 2), the button is again depressed inwardly. The inward motion of button 20 causes translational inward motion of outer member 52. Outer member 52 again engages inner member 50 causing inner member 50 to move outwardly from housing 26. Once protrusions 66 are positioned outside housing 26, inner member 50 is again freely rotatable within outer member 52. Due to the rotation which occurred when inner and outer members cammed along cam surface 78, crests 86 and 88 are slightly off-set. The pressure exerted by cam member 36 against engagement member 56 again causes toothed surface 64 to cam along toothed

- 17 -

surface 68 until crests 86 are positioned within trough 92 and crests 88 are positioned within troughs 90.

When button member 20 is released, cam member 36 causes inner and outer members 50 and 52 to undergo a translational outward motion. As outer member 52 enters housing 26, lower surfaces 71 of protrusions 70 engage cam surfaces 78. Surfaces 71 cam along surface 78 until each protrusion 70 is aligned with either a first or second channel 82 or 84. At this position, outer member 52 may travel inwardly into housing 26 until the position shown in Figure 4 is achieved. Similarly, as inner member 50 enters housing 26, protrusions 66 engage cam surface 78 and cam along this surface until each protrusion 66 is in alignment with a first channel 82. In this position, inner member 50 may travel inwardly into housing 26 until the position shown in Figure 4 is achieved. In this position, the button means is again locked in the first position. It will be appreciated that protrusions 66 and 70 are positioned relative to first and second channels 82 and 84 so that when inner and outer members 50 and 52 are received in opening 30, crests 86 are positioned offset from troughs 92 and when inner member 50 is moved outwardly to a position at which it is freely rotatable, the offset will cause inner member 50 to rotate relative to outer member 52.

As shown in Figures 1a and 1b, cable 14 is connected to actuator 94 which is positioned at one end of cylinder 12. Actuator 94 may have stationary arm 96 and pivoting arm 98. A spring may be positioned, for example, around wire 16 between arms 96 and 98 to bias arms 96 and 98 to the position shown in Figure 1a (see for example spring Figure 15). Preferably, cylinder 12 has two internal chambers which are isolated from each other by means of a valve (not shown). When the valve is open, fluid may flow from one chamber to the other thus allowing a telescopically expandable piston to expand outwardly, or contract inwardly, with respect to the

- 18 -

stationary housing of cylinder 12. Cylinder 12 has a valve release pin 100. When valve release pin 100 is in the closed position, then the valve is closed and the two chambers are isolated from each other so that the piston is fixed in the position with respect to the housing.

5 When valve release pin 100 is moved to the open position, the valve is open and the two chambers are allowed to communicate permitting the piston to expand outwardly from or inwardly into the housing. Cylinder 12 is preferably a non-pressurized

10 cylinder (i.e. when the valve is open, the pressure in the cylinder will not cause the piston to move either inwardly or outwardly). If cylinder 12 is a pneumatic (i.e. pressurized cylinder), then arms 96 and 98 of actuator 94 must have a large movement arm so that the button may be easily actuated by the pressure applied through a finger of the user.

15 When the user wishes to adjust cylinder 12, they push inwardly on button 20 with, for example, their thumb. This causes button 20 to move to the recessed position shown in Figure 3. When button 20 is pushed inwardly, transversely extending member 22 pushes on cam member 36 moving cam member 36 to
20 the position shown in Figure 3. This movement of cam member 36 causes wire 16 to draw arm 96 towards stationary arm 94 (it moves to the position shown in Figure 1b). By this movement, valve release pin 100 is forced inwardly into cylinder 12 thus permitting the piston of cylinder 12 to telescope either inwardly or outwardly
25 with respect to the housing.

When it is desired to fix cylinder 12 in a desired position, the user again pushes and releases button 20 moving it to the closed position shown in Figure 2, thus permitting valve release pin 100 to move arm 98 to the distal position shown in Figure 1a and thus
30 closing the valve.

The pressure required to move button 20 may vary from about 5 to about 10 pounds and, more preferably, is about 8 pounds.

- 19 -

If the pressure required to move button 20 is less than about 5 pounds, then button 20 may be accidentally actuated by the user brushing against. If the pressure is greater than about 10 pounds, then the pressure may be too great for many users to easily move
5 button 20. It has been found that a pressure of about 8 pounds is optimal.

Button 20 preferably has a relatively short stroke between the closed position shown in Figure 2 and the opened position shown in Figure 3. Preferably, the distance travelled by button 20
10 may be about up to 3/4 inch but, preferably, is about 1/2 inch and may be about 1/4 inch. Depending on the relative length of arms 36a and 36b of cam 36, the distance travelled by wire 16 may vary as button 20 travels between the two positions. A 1/2 inch movement of the button may cause wire 16 to travel 1/2 inch if arms 36a and
15 36b are substantially the same length.

As button 20 is utilized, wire 16 may become stretched. In order to ensure correct positioning of pivoting arm 98, as well as a full stroke for pivoting arm 98, adjustment means 102 may be provided. Adjustment means 102 may comprise a threaded opening
20 104 in stationary member 96 which receives threaded member 106 which is provided at the end of cable 14. Nut 108 is provided to secure threaded member 106 in the desired position.

By turning stationary arm 104 relative to threaded member 106, threaded member may be moved alternately further into or
25 further out of threaded opening 104. Movement of member 106 accordingly adjusts the amount of cable extending between arms 96 and 98. Accordingly, the open position of pivoting arm 98 (as shown in Figure 1a), may be increased or decreased. When member 106 is in the desired position, nut 108 may be moved to the position
30 shown in Figure 1c to prevent further lengthening of wire 16.

It will be appreciated by those skilled in the art that various modifications of button means 10 may be permissible. For example,

- 20 -

if cylinder 12 is actuated by the outward movement of valve release pin 100, then button means 10 could be designed to release tension in wire 16 permitting the expansion outwardly of valve release pin 100, as opposed to providing a tensional force thereto as shown
5 herein. Further, as will be appreciated by those skilled in the art, the exact configuration and orientation actuator 94 may be varied.

A chair may have a seat member which may be inclined. Referring to Figures 10 - 14, the use of a button, and preferably a two position button, to control the inclination of the seat member of a
10 chair will now be discussed.

Referring to Figure 10, a pedestal chair is shown. For ease of reference, the foam padding of the chair has been removed so only the frame members are visible. The frame members may be made of any particular material which provide sufficient strength for the
15 chair. Preferably, the frame members are made from metal. Chair 110 comprises seat member 112, chair back member (which may be referred to as a back rest member) 114, wheeled base 116 and support leg 118 extending between seat member 112 and wheeled base 116. Arms 120 are provided at opposite sides of seat member 112. For
20 clarity, only one arm has been shown in Figure 10.

In the embodiment of Figures 10 - 14, chair back member 114 is affixed to seat member 112 by back support member 122. As will be appreciated by those skilled in the art, the chair need not have a chair back. If the chair includes a chair back, then various
25 means are known in the art for fixing chair back 114 to seat member 112. Chair back 114 may be pivotally mounted by means of pivot means 124 to seat member 112 so that the angle of inclination of chair back 114 can be varied with respect to seat member 112. Alternately, chair back 114 may be fixed in position with respect to
30 seat member 112.

Optionally, means may be provided to adjust the height of the chair. Accordingly, support leg 118 may comprises a

- 21 -

telescopically expanding cylinder having upper and lower sections (not shown). Such cylinders are generally known in the art and have two internal chambers which are isolated from each other by means of a valve. When the valve is opened, fluid may flow from one chamber to the other thus allowing the upper section to expand upwardly, or contract downwardly, so as to adjust the height of the chair.

Seat member 112 may comprise frame 130 having longitudinal side portions 132 and transverse front portion 134. Additional reinforcement is provided to frame 130 by transverse struts 136 which extend between longitudinal side portions 132.

Struts 136 may be affixed to the lower side of the longitudinal side portions 132 by any means known in the art. For example, if side portions 132 and struts 136 are made of metal, struts 136 may be welded or bolted to side portions 132. In the preferred embodiment of Figure 10, each strut 136 has descending portions 138 which are connected by horizontal portion 140. Horizontal portion 140 provides a mounting platform for leg support 118 which is positioned below seat member 112.

Seat member 112 is pivotally mounted with respect to support leg 118 so that it may rock back and in the arc represented by arrow A in Figure 12. Referring to Figures 11 and 12, upper mounting plate 150 is affixed to the lower surface of horizontal portion 140 of struts 136. Once again, upper mounting plate 150 may be affixed by any means known in the art (eg. welding or bolting) to horizontal portions 140 if these components are made of metal. Lower mounting plate 152 is affixed to the upper portion of support leg 118 by any means known in the art. Upper mounting plate 150 is pivotally mounted with respect to lower mounting plate 152 by means of pivot pin 154 which extends transversely through openings (not shown) in upper and lower mounting plates 150, 152. Accordingly, seat member 112 may be pivoted from the horizontal

- 22 -

position shown in Figure 11 to the rearwardly inclined position shown in Figure 12.

Preferably, seat member 112 may be biased, eg., into the generally horizontal position by spring means as is known in the art (not shown). The spring means may be mounted in spring housing 156 and extend from spring housing 156 to lower surface 158 of upper mounting plate 150 as is known in the art. Further, tensioning means may be provided such as knob 160, to adjust the tension in the spring means.

As shown in Figures 11 and 12, infinite tilt adjustment mechanism 170 comprises cylinder 172 having stationary housing 174, telescopically expandable piston 176 mounted therein and valve release pin 182. Cylinder 172 preferably extends generally vertically and is preferably mounted at the front portion of chair 110. Cylinder 172 is preferably pivotally mounted on chair 110 by means of upper pivot mount 178 and lower pivot mount 180.

Cylinder 172 may be a fluid cylinder and is preferably filled with a non-compressible fluid (e.g. oil). Cylinder 172 has two internal chambers which are isolated from each other by means of a valve (not shown). When the valve is opened, fluid may flow from one chamber to the other thus allowing telescopically expandable piston 176 to expand upwardly, or contract downwardly, with respect to stationary housing 174. When valve release pin 182 is in the closed position, then the valve is closed and the two chambers are isolated from each other so that piston 176 is fixed in position with respect to housing 174. Accordingly, the tilt or inclination of the chair with respect to the horizontal is fixed in position when valve release pin 182 is in the closed position. When valve release pin 182 is moved to the open position, then the valve is open and the two chambers are allowed to communicate permitting piston 176 to expand outwardly from housing 174 or to contract inwardly

- 23 -

into housing 174 so that the inclination at seat member 112 may be adjusted either upwardly or downwardly.

Referring to Figure 13, the upper portion of cylinder 172 may be pivotally mounted by means of upper pivot mount 178. Upper pivot mount 178 comprises mounting bracket 184 which is affixed to transverse front portion 134 (e.g. by welding or bolting if these elements are made of metal). Piston 176 has upper portion 186 which is positioned within bracket 184. Upper portion 186 and bracket 184 have openings provided therein through which pivot pin 187 may pass.

The lower portion of cylinder 172 may be pivotally mounted as follows. Housing 174 may have lower portion 190 which is fixed to plate 192 (e.g. by welding). The rear portion of plate 192 is affixed to tubular bracket member 194 (see Figure 10). Alternately, tubular bracket member 194 may be integrally formed as part of plate 192. Lower mounting plate 152 is provided with tubular bracket members 196 which may be affixed thereto eg. by welding. Tubular bracket members 196 and tubular bracket member 194 are positioned so as to define a longitudinally extending channel through which pivot pin 198 may extend.

As will be appreciated by referring to Figures 11 and 12, when seat member 112 is adjusted from the generally horizontal position to an inclined position, the angle between cylinder 172 and lower mounting plate 152 as well as the angle between cylinder 172 and front portion 134 will vary slightly. By pivotally mounting cylinder 172 with respect to both lower mounting plate 152 and front portion 134, no tensional or bending stresses are imparted to cylinder 172 and accordingly piston 176 may smoothly travel into and out of housing 174.

Actuator 200 may be any actuator that is adapted to operate a cylinder 172 and may be mounted on the lower surface of plate 192. Preferably, actuator 200 has a stationary arm 202 and pivoting arm

- 24 -

204 which is pivotally connected to stationary arm 202 by pivot pin 206. Stationary arm 202 may be affixed to plate 192 by any means known in the art that provides a fixed amount for pivot pin 206. As will be appreciated, stationary arm 202 may be of any particular shape that provides a fixed mount for pivot pin 206. Pivoting arm 204 has inner surface 208.

The distal end of arm 202 from pivot pin 206 is provided with opening 210. Similarly, the distal end of pivoting arm 204 from pivot pin 206 is provided with opening 212. Cable 214 comprises, e.g. a braided wire 218, which is held within a plastic like housing to permit smooth movement of wire 218 therein. Wire 218 is provided with enlarged end 220. Cable 214 is provided with shoulder member 216 which abuts against stationary arm 202. Wire 218 passes through openings 210 and 212. Enlarged end 220 is retained on outer surface 222 of pivoting arm 204, such as by providing a recess in which enlarged end 220 is seated, while permitting wire 218 to pass through openings 210 and 212.

An opening is provided in stationary arm 202 so that, as pivoting arm 204 moves from position shown in Figure 1a to the position shown in Figure 1b, valve release pin 182 is moved from the closed position (in which piston 176 is fixed in position with respect to housing 174) to the open position (in which piston 176 may move with respect to housing 174). To this end, as shown in Figure 13, valve release pin 182 may extend outwardly through stationary arm 202. Inner surface 208 of pivoting arm 204 may be flat so that as arm 204 pivots towards stationary arm 202 (to the position shown in Figure 1b) valve release pin 182 is depressed into housing 174 thus opening the valve. Alternately, it will be appreciated that protrusion 203 or other button means may be provided on inner surface 208 to contact valve release pin 182 and that valve release pin 182 may be recessed within stationary arm 202 if protrusion 203 is of sufficient size.

- 25 -

Button means 230 is provided in arm 120. Button means 230 may comprise any button moveable between the depressed (open) position and the outward (open) position. Preferably, button means 230 comprises a button means 10 which locks in each of these positions.

The operation of the actuation means will now be described with the use of the lockable two position button shown in Figures 2 and 3. Referring to Figure 13, valve release pin 182 is shown in the closed position. In this position, valve release pin 182 is in the raised position. Due to the construction of the cylinder, valve release pin 182 is biased into this position so that cylinder 172 will not be prematurely actuated. The pressure exerted by valve release pin 182 against arm 204 causes arm 204 to be maintained in the distal position with respect to stationary arm 202. This force upon arm 204 is transmitted through cable 214 and therefore retains cam member 36 in the position shown in Figure 2. Arm 36b of cam member 36 transmits this force outwardly through transversely extending member 22 to button 20 so that button 20 is in the raised position shown in Figure 2.

When the user wishes to adjust the inclination of the seat member of the chair, they push inwardly on button 20 with, for example, their thumb. This causes button 20 to move to the recessed (open) position shown in Figure 3. When button 20 is pushed inwardly, transversely extending member 22 pushes on arm 36b of cam member 36 moving cam member 36 to the position shown in Figure 3. This movement of cam member 36 causes cable 214 to draw arm 204 towards stationary arm 202. By this movement, valve release pin 182 is forced inwardly into cylinder 172 thus permitting piston 176 to telescope either inwardly or outwardly with respect to housing 174. The user may rock backwards and forwards in the chair. When the user desires to fix the seat member of the chair in a desired position, the user moves the seat member to the desired

- 26 -

position, and presses button 20 to release button 20 permitting valve release pin 182 to move arm 204 to the distal (closed) position shown in Figure 13 thus closing the valve. In this position, the inclination of the chair is once again fixed at a desired inclination. It will be appreciated that if a lockable button is not used, then the user must continuously depress button 230 until the seat member is in the desired position.

Referring to Figure 13, it will be appreciated that arm 204 provides a moment arm to reduce the pressure which must be exerted by the user to move valve release pin 182 from the closed position to the open position. In particular, the distance between valve release pin 182 and cable 214, referred to by reference numeral B in Figure 13, provides a moment arm which is substantially longer than the distance between pivot pin 206 and valve release pin 182, referred to by reference numeral A. By varying the length of moment arm B with respect to A, the amount of force which must be applied, and the distance through which cable 214 must travel, may be adjusted. Preferably, the length of moment arm B with respect to A, and its configuration, are sufficient to permit button 230 to be depressed when a relatively low force is applied by the user, e.g. that pressure which may be applied through a finger by the average person. If moment arm B is too long, or the distance which must be travelled by arm 204 is too short, then the adjustment mechanism may be accidentally actuated by the user by merely brushing against button 230. The ratio of the distance B:A preferably varies from about 1:2 to about 1:3, more preferably, from about 1:2 to about 1:2.5 and more preferably the ratio is about 1:2.5.

By constructing actuator 200 according to this invention, the amount of pressure directed on the valve release pin 182 by pivot arm 204 may be substantially greater than the pressure required to depress button 230. Preferably, a pressure from about 10 to about 20, more preferably from about 15 to about 20 pounds, is required to

- 27 -

move valve release pin 182 to the open position. In such a case, the pressure required to move button 230 may vary from about 5 to about 10 pounds and, more preferably, is about 8 pounds. If the pressure required to move button 230 is less than about 5 pounds, then button 132 may be accidentally actuated by the user brushing against. If the pressure is greater than about 10 pounds, then the pressure may be too great for many users to easily actuate the adjustment mechanism. It has been found that a pressure of about 8 pounds is optimal.

Generally the arms of chairs are relatively thin. Thus, to fit button 230 in arm 120 of chair 110, button 230 generally has a relatively short stroke between the released position shown in Figure 2 and the depressed position shown in Figure 3. Preferably, the distance travelled by button 230 may be about up to 3/4 inch but, preferably, is about 5/8 inch. Correspondingly, the distance travelled by pivoting arm 204 with respect to stationary arm of 202 is preferably about 5/8 inch. Thus, due to the length of moment arm B, the ratio of the distance travelled by button 230 to the distance travelled by pivoting arm 204 permits about a corresponding increase in the magnitude of force applied by arm 204 to valve release pin 182.

A chair may have a chair back member which may be inclined. Referring to Figures 10 and 14 - 17, the use of a button, and preferably a two position button, to control the inclination of the chair back member of a chair will now be discussed.

Chair back member 114 is pivotally mounted with respect to the seat member so that the angle of inclination of chair back member 114 may be varied with respect to seat member 112. Chair back member 114 may itself be pivotally mounted to seat member 112 (eg. by mounting the frame of chair back member 114 to the frame of seat member 112). Preferably, as shown in Figures 10, 16 and 17, chair back member 114 is fixed to transverse rear portion 264

- 28 -

that is itself pivotally mounted to seat member 112. Transverse rear portion 264 is preferably pivotally mounted to longitudinal side portions 132 adjacent the rear ends of longitudinal side portions 132.

As shown in Figures 10, chair back member 114 has a
5 mounting plate 262. The upper portion of back support member 122 is attached to mounting plate 262. For example, if back support member 122 and mounting plate 262 are made of metal, back support member 122 may be welded or bolted to mounting plate 262. Alternately, back support member 122 may be slidably received in
10 mounting plate 262 so that the height of chair back member 114 may be adjusted with respect to seat member 112. Back support member 122 may be received in a opening in mounting plate 262 which is dimensioned to fixedly hold back support member 122 in place. Similarly, the lower portion of back support member 122 is attached
15 to transverse rear portion 264. For example, if back support member 122 and transverse rear portion 264 are made of metal, back support member 122 may be welded or bolted to transverse rear portion 264.

Transverse rear portion 264 is preferably pivotally secured to the rear portions of longitudinal side portions 132 by pivot means
20 124. Transverse rear portion 264 may have descending end portions 268 and central horizontal portion 270. Pivot means 124 may be any means known in the art. For example, pivot means 124 may comprise a bolt having a head (positioned on the inner surface of descending portion 268), a longitudinally extending body portion
25 (extending through descending portion 268) and an end (positioned in longitudinal side portion 132) to which a bolt is attached. A spacer 272 may be placed over a portion of the longitudinally extending body portion of the bolt. Transverse rear portion 264 may accordingly be pivotally mounted between the bolt and spacer 272.
30 Accordingly, chair back member 114 is fixed in position with respect to transverse member 264 and pivots with respect to seat member 112 as transverse member 264 pivots. As will be appreciated, by

- 29 -

affixing chair back member 114 to member 264 that is pivotally mounted to seat member 112, member 264 defines a moment arm which levers the force that is applied to move seat back member 114.

As shown in Figures 10, 13 and 14, tilt adjustment
5 mechanism 280 is preferably mounted offset to one side, and in the plane of, seat member 112. Mechanism 280 comprises motion control fluid cylinder 282 having stationary housing 284, telescopically expandable piston 286 mounted therein and valve release pin 288. Motion control fluid cylinder 282 is preferably
10 fixedly mounted to the forward portion of seat member 112 by means of forward mount 290 and, preferably, pivotally mounted to the rear of seat member 112 by rearward pivot mount 292.

Motion control fluid cylinder 282 may be a non-pressurized cylinder and is preferably filled with a non-compressible fluid (e.g.
15 oil). As is known in the art, motion control fluid cylinder 282 has two internal chambers which are isolated from each other by means of a valve (not shown). When the valve is opened, fluid may flow from one chamber to the other thus allowing telescopically expandable piston 286 to expand forwardly, or contract rearwardly,
20 with respect to stationary housing 284. When valve release pin 288 is in the closed position, then the valve is closed and the two chambers are isolated from each other so that piston 286 is fixed in position with respect to housing 284. Accordingly, the inclination of chair back member 114 is fixed in position when valve release pin
25 288 is in the closed position. When valve release pin 288 is moved to the open position, then the valve is open and the two chambers are allowed to communicate permitting piston 286 to expand outwardly from housing 284 or to contract inwardly into housing 284 so that the inclination chair back member 114 may be adjusted
30 either forwardly or rearwardly.

Forward mount 290 may comprise a flange which descends from the lower surface of horizontal portion 140. The forward end

- 30 -

of piston 286 extends through an opening in the flange and is fixedly mounted thereto. Piston 286 may be fixedly mounted thereto by any means known in the art. Therefore, any movement of piston 286 with respect to housing 284 causes housing 284 to move rearwardly.

5 Rearward pivot mount 292 may comprise flange 294 and extension arms 296. Referring to Figure 15, flange 294 extends forwardly from the lower surface of horizontal portion 270. Extension arms 296 extend rearwardly from housing 284. Extension arms 296 may be pivotally connected to flange 294 by any means
10 known in the art. Extension arms 296 are pivotally connected to flange 294 by means of bolt 298 and screw 300.

 Actuator 310 may be the same as actuator 200. Actuator 310 is mounted on the forward portion of piston 286 at a position forward of mount 290. Actuator 310 has a stationary arm 312 and
15 pivoting arm 314 which is pivotally connected to stationary arm 312 by pivot pin 316. Stationary arm 312 may be affixed to piston 286 by any means known in the art that provides a fixed amount for pivot pin 316. As will be appreciated, stationary arm 312 may be of any particular shape that provides a fixed mount for pivot pin 316.
20 Pivoting arm 314 has inner surface 318.

 The distal end of arm 312 from pivot pin 316 is provided with opening 320. Similarly, the distal end of pivoting arm 314 from pivot pin 316 is provided with an opening (not shown). Cable 322 comprises, e.g. a braided wire 324, which is held within a plastic
25 like housing to permit smooth movement of wire 324 therein. Wire 324 is provided with enlarged end 326. Cable 322 is provided with shoulder member 328 which abuts against stationary arm 312. Wire 324 passes through the openings in arms 312 and 314. Enlarged end 326 is retained on outer surface 330 of pivoting arm
30 314, such as by providing a recess in which enlarged end 326 is seated, while permitting wire 324 to pass through the openings in arms 312 and 314.

- 31 -

An opening is provided in stationary arm 312 so that, as pivoting arm 314 moves towards stationary arm 312, release pin 288 is moved from the closed position (in which piston 286 is fixed in position with respect to housing 284) to the open position (in which piston 286 may move with respect to housing 284). To this end, as shown in Figure 15, valve release pin may extend outwardly through stationary arm 312. Inner surface 318 of pivoting arm 314 may be flat so that as arm 314 pivots towards stationary arm 312, valve release pin 288 is depressed into housing 284 thus opening the valve. Alternately, as shown in Figure 15, it will be appreciated that protrusion 332 or other button means may be provided on inner surface 318 to contact valve release pin 288 and that valve release pin 288 may be recessed within stationary arm 312 if the button means is of sufficient size.

As with the seat member tilt adjustment means, cable 322 is affixed to a second button means 334 as is shown in Figure 10. The button means 334 which operates actuator 310 may be positioned beside the button means 230 which operates actuator 200. Alternately, the button means 334 which operates actuator 310 may be positioned in the other arm 120 from the button means 230 which operates actuator 200. As with button means 230, button means 334 may comprise any button moveable between the depressed (open) position and the outward (open) position. Preferably, button means 334 comprises a button means 10 which locks in each of these positions. Similarly, actuator 310 may be operated in the same manner as actuator 200.

It will be appreciated by those skilled in the art that various modifications of actuators 200 and 310 may be permissible. For example, by way of example with respect to actuator 200, if cylinder 172 is actuated by the outward movement of valve release pin 182, then button means 230 could be designed to release tension in cable 214 permitting the expansion outwardly of valve release pin 182, as

- 32 -

opposed to providing a tensional force thereto as shown herein. Further, as will be appreciated by those skilled in the art, the exact configuration and orientation of arm 202 may be adjusted so long as a fixed mount is provided for pivot pin 206. Further, the exact
5 configuration and orientation of arm 204 may be varied.



WO 97/07715



PCT/CA96/00566

- 33 -

CLAIM:

1. An actuator apparatus for actuating a positioning linkage including cylinder means in a seating unit receiving the actuator apparatus, the actuator apparatus comprising:
- 5 (a) a housing adapted for mounting in the arm of a seating unit;
- (b) button means receivable in said housing and moveable longitudinally between a first position and a second position, said button means including locking means for alternately maintaining said button means in said first and second positions;
- 10 (c) actuating means for actuating the cylinder means, the cylinder means having a stationary portion and a moveable portion;
- 15 (d) flexible cable means having a first end connected to said button means and a second end operatively connected to said actuating means
- whereby, when said button means is moved from said first position to said second position, said actuating means is actuated so that the moveable portion of the cylinder means may be adjusted relative to the stationary portion, and when said button means is moved from said second position to said first position, the moveable portion of the cylinder means is fixed relative to the stationary portion.
- 20
- 25 2. The actuator apparatus as claimed in claim 1 wherein said cylinder means is a non-pressurized cylinder.
3. The actuator apparatus as claimed in claim 1 wherein said button means comprises a longitudinally extending shaft member and said locking means comprises first engagement means

This Sheet Has Been Replaced





- 34 -

positioned on said shaft and second engagement means provided in said housing for engaging said first engagement means.

4. The actuator apparatus as claimed in claim 3 wherein said housing has a longitudinally extending opening having an inner surface and said second engagement means is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement means to undergo a rotational movement to alternately secure said button in said first and second positions.
5. The actuator apparatus as claimed in claim 3 wherein said shaft member comprises an outer shaft member and an inner shaft member, said first engagement means comprises first and second engagement members provided on said outer and inner shaft members.
6. The actuator apparatus as claimed in claim 3 wherein
- (a) said shaft member comprises first and second longitudinally extending members each having first and second ends;
- (b) said first end of said first longitudinally extending member adapted to receive a button, said first engagement means comprises a first engagement member positioned on said second end of said first longitudinally extending member, said first longitudinally extending member having an opening extending from said second end towards said first end, said first engagement member having a first engagement surface;
- (c) said second longitudinally extending member being slideably positioned within said first longitudinally extending member with said first end of said second longitudinally extending member positioned within said first longitudinally extending





* C L M S *

WO 97/07715

PCT/CA96/00566



- 35 -

member, said first engagement means further comprises a second engagement member positioned on said second end and having a third engagement surface drivingly engaged by said first engagement surface as said button travels between first and second positions to rotate said second longitudinally extending member at least part way around said axis;

(d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first and second longitudinally extending members, said opening having an inner surface and said second engagement means is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement means to undergo a rotational movement to alternately secure said button in said first and second positions.

7. The actuator apparatus as claimed in claim 6 wherein

(a) said second engagement means comprises a plurality of first and second longitudinally extending channels extending from said first end towards said second end and spaced periodically around said surface, each of said second channels positioned between a pair of first channels, said second channels being further recessed into said surface than said first channels;


(b) said first engagement member having a plurality of first protrusions dimensioned to be received in said first channels and positioned to be received in said first and second channels;

(c) said second engagement member having a plurality of second protrusions dimensioned to be received in said second channels and positioned to be received in said second channels; and,

(d) cam means positioned on said inner surface adjacent said first end to engage said first and second protrusions and align said first protrusions with said first and second channels and said second protrusions and with said second channels.

This Sheet Has Been Replaced





- 36 -

8. The actuator apparatus as claimed in claim 3 wherein said actuating means includes adjustment means for adjusting the length of said flexible cable means.

9. A seating unit comprising:

- 5 (a) a support member;
- (b) a seat member pivotally mounted on said support member;
- (c) an arm rest member, said arm rest member including a housing;
- 10 (d) button means receivable in said housing and moveable longitudinally between a first position and a second position, said button means including locking means for alternately maintaining said button means in said first and second positions;
- 15 (e) a cylinder having actuating means and operatively connected to said seat member for adjustment of the inclination thereof; and,
- (f) flexible cable means having a first end connected to said button means and a second end operatively connected to
- 20 said actuating means

whereby, when said button means is moved from said first position to said second position, said actuating means is actuated so that the inclination of the seat member may be adjusted and when said button means is moved from said second position to said first

25 position, the inclination of the seat member is fixed.

10. The seating unit as claimed in claim 10 wherein said cylinder means is a non-pressurized cylinder.

This Sheet Has Been Replaced



WO 97/07715

THIS SHEET HAS BEEN
REPLACED

PCT/CA96/00566

- 37 -

11. The seating unit as claimed in claim 10 wherein said button means comprises a longitudinally extending shaft member and said locking means comprises first engagement means positioned on said shaft and second engagement means provided in said housing
5 for engaging said first engagement means.

12. The seating unit as claimed in claim 11 wherein said housing has a longitudinally extending opening having an inner surface and said second engagement means is provided on said inner surface whereby movement of said button from said first
10 position to said second position causes said first engagement means to undergo a rotational movement to alternately secure said button in said first and second positions.

13. The seating unit as claimed in claim 11 wherein said shaft member comprises an outer shaft member and an inner shaft
15 member; said first engagement means comprises first and second engagement members provided on said outer and inner shaft members.

14. The seating unit as claimed in claim 11 wherein
(a) said shaft member comprises first and second
20 longitudinally extending members each having first and second ends;

(b) said first end of said first longitudinally extending member adapted to receive a button, said first engagement means comprises a first engagement member positioned on said second
25 end of said first longitudinally extending member, said first longitudinally extending member having an opening extending from said second end towards said first end, said first engagement member having a first engagement surface;

This Sheet Has Been Replaced





(c) said second longitudinally extending member being slideably positioned within said first longitudinally extending member with said first end of said second longitudinally extending member positioned within said first longitudinally extending member, said first engagement means further comprises a second engagement member positioned on said second end and having a third engagement surface drivingly engaged by said first engagement surface as said button travels between first and second positions to rotate said second longitudinally extending member at least part way around said axis;

(d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first and second longitudinally extending members, said opening having an inner surface and said second engagement means is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement means to undergo a rotational movement to alternately secure said button in said first and second positions.

15. The seating unit as claimed in claim 14 wherein

(a) said second engagement means comprises a plurality of first and second longitudinally extending channels extending from said first end towards said second end and spaced periodically around said surface, each of said second channels positioned between a pair of first channels, said second channels being further recessed into said surface than said first channels;

(b) said first engagement member having a plurality of first protrusions dimensioned to be received in said first channels and positioned to be received in said first and second channels;

(c) said second engagement member having a plurality of second protrusions dimensioned to be received in said second channels and positioned to be received in said second channels; and,





WO 97/07715



PCT/CA96/00566

- 39 -

(d) cam means positioned on said inner surface adjacent said first end to engage said first and second protrusions and align said first protrusions with said first and second channels and said second protrusions and with said second channels.

5 16. The seating unit as claimed in claim 11 wherein said actuating means includes adjustment means for adjusting the length of said flexible cable means.

10 17. The seating unit as claimed in claim 9 wherein said cylinder includes a valve release member, said actuating means comprises an arm member pivotally mounted with respect to said valve release member, said arm member having a moment arm of sufficient length to permit said button means to move from said first position to said second position by the force applied through a finger of the user when said user is seated in the seating unit.

15 18. The seating unit as claimed in claim 9 wherein said cylinder includes a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section and said stationary section is
20 pivotally mounted on said seat member.

19. The seating unit as claimed in claim 18 wherein said cylinder extends upwardly from said support member to said seat member.

20. A seating unit comprising:
25 (a) a support member;
(b) a seat member pivotally mounted on said support member;

This Sheet Has Been Replaced





* C L M S *

THIS SHEET HAS BEEN
REPLACED

WO 97/07715

PCT/CA96/00566

- 40 -

- (c) an arm rest member, said arm rest member including a housing;
- (d) a cylinder having actuating means and operatively connected to said seat member for adjustment of the inclination thereof, said cylinder having a telescopically extendable section, a stationary section and a valve release member moveable between a closed position in which said telescopically extendable section is fixed in position relative to said stationary section and an open position in which said telescopically extendable section is moveable relative to said stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section and said stationary section is pivotally mounted on said seat member, said cylinder extending upwardly from said support member to said seat member;
- (e) actuating means operatively connected to said valve release member and movable between a first position, in which said valve release member is in said closed position, and a second position, in which said valve release member is in said open position;
- (f) button means receivable in said housing and moveable longitudinally between a first position and a second position; and,
- (g) flexible cable means having a first end connected to said button means and a second end operatively connected to said actuating means,
- whereby, when said button means is moved from said first position to said second position, said valve release member is moved to said open position so that the inclination of the seat member may be adjusted and when said button means is moved from said second position to said first position, said valve release member is moved

This Sheet Has Been Replaced





WO 97/07715

THIS SHEET HAS BEEN
REPLACED

PCT/CA96/00566

- 41 -

to said closed position so that the inclination of the seat member is fixed.

21. The actuator apparatus as claimed in claim 20 wherein said cylinder means is a non-pressurized cylinder.

5 22. The seating unit as claimed in claim 21 wherein said actuating means includes an arm member pivotally mounted on a pivot member with respect to said valve release member, the ratio of the distance between said pivot member and the portion of said arm member to which said cable is affixed to the distance between
10 said pivot member and said valve release member being sufficient to permit said button means to be moved from said first position to said second position by the force applied through a finger of the user when said user is seated in the seating unit.

15 23. The seating unit as claimed in claim 20 further comprising locking means for alternately maintaining said button means in said first and second positions.

24. The seating unit as claimed in claim 20 wherein said seating unit is a chair.

20 25. A seating unit comprising:
(a) a support member;
(b) a longitudinally extending seat member positioned on said support member;
(c) a back member pivotally mounted with respect to said seat member for movement between an upright position
25 and a reclined position;
(d) an arm rest member, said arm rest member including a housing;

This Sheet Has Been Replaced





5 (e) button means receivable in said housing and moveable longitudinally between a first position and a second position, said button means including locking means for alternately maintaining said button means in said first and second positions;

(f) a cylinder having actuating means and operatively connected to said back member for adjustment of the inclination thereof; and,

10 (g) flexible cable means having a first end connected to said button means and a second end operatively connected to said actuating means

whereby, when said button means is moved from said first position to said second position, said actuating means is actuated so that the inclination of the back member may be adjusted and when said
15 button means is moved from said second position to said first position, the inclination of the back member is fixed.

26. The seating unit as claimed in claim 25 wherein said cylinder means is a non-pressurized cylinder.

20 27. The seating unit as claimed in claim 25 wherein said button means comprises a longitudinally extending shaft member and said locking means comprises first engagement means positioned on said shaft and second engagement means provided in said housing for engaging said first engagement means.

25 28. The seating unit as claimed in claim 27 wherein said housing has a longitudinally extending opening having an inner surface and said second engagement means is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement means





* C L M S *

WO 97/07715

THIS SHEET HAS BEEN
REPLACED

PCT/CA96/00566

- 43 -

to undergo a rotational movement to alternately secure said button in said first and second positions.

29. The seating unit as claimed in claim 27 wherein said shaft member comprises an outer shaft member and an inner shaft member, said first engagement means comprises first and second engagement members provided on said outer and inner shaft members.

30. The seating unit as claimed in claim 27 wherein
(a) said shaft member comprises first and second longitudinally extending members each having first and second ends;

(b) said first end of said first longitudinally extending member adapted to receive a button, said first engagement means comprises a first engagement member positioned on said second end of said first longitudinally extending member, said first longitudinally extending member having an opening extending from said second end towards said first end, said first engagement member having a first engagement surface;

(c) said second longitudinally extending member being slideably positioned within said first longitudinally extending member with said first end of said second longitudinally extending member positioned within said first longitudinally extending member, said first engagement means further comprises a second engagement member positioned on said second end and having a third engagement surface drivingly engaged by said first engagement surface as said button travels between first and second positions to rotate said second longitudinally extending member at least part way around said axis;

(d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first

This Sheet Has Been Replaced





THIS SHEET HAS BEEN
REPLACED

WO 97/07715

PCT/CA96/00566

- 44 -

and second longitudinally extending members, said opening having an inner surface and said second engagement means is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement means to undergo a rotational movement to alternately secure said button in said first and second positions.

31. The seating unit as claimed in claim 30 wherein

(a) said second engagement means comprises a plurality of first and second longitudinally extending channels extending from said first end towards said second end and spaced periodically around said surface, each of said second channels positioned between a pair of first channels, said second channels being further recessed into said surface than said first channels;

(b) said first engagement member having a plurality of first protrusions dimensioned to be received in said first channels and positioned to be received in said first and second channels;

(c) said second engagement member having a plurality of second protrusions dimensioned to be received in said second channels and positioned to be received in said second channels; and,

(d) cam means positioned on said inner surface adjacent said first end to engage said first and second protrusions and align said first protrusions with said first and second channels and said second protrusions and with said second channels.

32. The seating unit as claimed in claim 27 wherein said actuating means includes adjustment means for adjusting the length of said flexible cable means.

33. The seating unit as claimed in claim 25 wherein said cylinder includes a valve release member, said actuating means comprises an arm member pivotally mounted with respect to said

This Sheet Has Been Replaced





WO 97/07715

THIS SHEET HAS BEEN
REPLACED

PCT/CA96/00566

- 45 -

valve release member, said arm member having a moment arm of sufficient length to permit said button means to move from said first position to said second position by the force applied through a finger of the user when said user is seated in the seating unit.

5 34. The seating unit as claimed in claim 25 wherein said cylinder has spring means to bias said back member to said upright position.

10 35. The seating unit as claimed in claim 25 wherein said cylinder includes valve release member, said actuating means comprises an arm member pivotally mounted with respect to said valve release member, said arm member having a moment arm of sufficient length to permit said button means to move from said first position to said second position by the force applied through a finger of the user when said user is seated in the seating unit.

15 36. The seating unit as claimed in claim 25 wherein said cylinder includes a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back member.

20 37. The seating unit as claimed in claim 36 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.


25 38. The seating unit as claimed in claim 36 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.

This Sheet Has Been Replaced





WO 97/07715



PCT/CA96/00566

- 46 -

39. The seating unit as claimed in claim 25 wherein said seating unit is a chair.

40. A seating unit comprising:

- (a) a support member;
- 5 (b) a longitudinally extending seat member positioned on said support member;
- (c) a back member pivotally mounted with respect to said seat member for movement between an upright position and a reclined position;
- 10 (d) an arm rest member, said arm rest member including a housing;
- (e) button means receivable in said housing and moveable longitudinally between a first position and a second position
- 15 (f) locking means for alternately maintaining said button means in said first and second positions;
- (g) a cylinder having actuating means and operatively connected to said back member for adjustment of the inclination thereof; and,
- 20 (h) flexible cable means having a first end connected to said button means and a second end operatively connected to said actuating means

whereby, when said button means is moved from said first position to said second position, said actuating means is actuated so that the
25 inclination of the back member may be adjusted and when said button means is moved from said second position to said first position, the inclination of the back member is fixed.

41. The seating unit as claimed in claim 40 wherein said cylinder means is a non-pressurized cylinder.

This Sheet Has Been Replaced





WO 97/07715

THIS SHEET HAS BEEN
REPLACED

PCT/CA96/00566

- 47 -

42. The seating unit as claimed in claim 40 wherein said seating unit is a chair.

43. The seating unit as claimed in claim 40 wherein said cylinder includes a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back member.

44. The seating unit as claimed in claim 40 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.

45. The seating unit as claimed in claim 42 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.

46. The seating unit as claimed in claim 42 wherein said cylinder has spring means to bias said back member to said upright position.

This Sheet Has Been Replaced





WO 97/07715

THIS SHEET HAS BEEN
REPLACED

PCT/CA96/00566

-48-

AMENDED CLAIMS

[received by the International Bureau on 27 January 1997 (27.01.97);
original claims 1-8 amended; remaining claims unchanged (4 pages)]

1. An moveable chair comprising:

5

(a) a support member having a base adapted for movement across the surface on which the chair is situated;

(b) a seat member mounted on said support member;

(c) an arm rest member;

10

(d) a housing mounted proximate said arm rest member;


(e) button means receivable in said housing and moveable longitudinally between a first position and a second position, said button means including locking means for alternately maintaining said button means in said first and second positions;

(f) actuating means for reconfiguring said chair, said chair having a stationary portion and a moveable portion; and,
(g) flexible cable means having a first end connected to said button means and a second end operatively connected to said actuating means

20 whereby, when said button means is moved from said first position to said second position, said actuating means is actuated so that the moveable portion of said chair may be adjusted relative to the stationary portion, and when said button means is moved from said second position to said first position, the moveable portion of the chair
25 is fixed relative to the stationary portion.

2. The chair as claimed in claim 1 wherein said actuating means is operatively connected to a non-pressurized cylinder.

30 3. The chair as claimed in claim 1 wherein said button means comprises a longitudinally extending shaft member and said locking means comprises first engagement means positioned on said shaft and

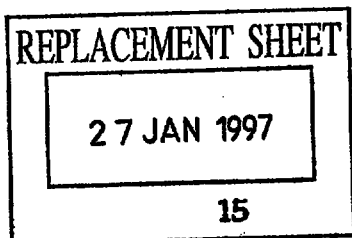

This Sheet Has Been Replaced



AMENDED SHEET (ARTICLE 19)

second engagement means provided in said housing for engaging said first engagement means.

4. The chair as claimed in claim 3 wherein said housing has a
5 longitudinally extending opening having an inner surface and said
second engagement means is provided on said inner surface whereby
movement of said button means from said first position to said second
position causes said first engagement means to undergo a rotational
movement to alternately secure said button in said first and second
10 positions.

5. The chair as claimed in claim 3 wherein said shaft member
comprises an outer shaft member and an inner shaft member, said
first engagement means comprises first and second engagement
15 members provided on said outer and inner shaft members.

6. The chair as claimed in claim 3 wherein

(a) said shaft member comprises first and second longitudinally
extending members each having first and second ends;

20 (b) said first end of said first longitudinally extending member
adapted to receive a button, said first engagement means comprises a
first engagement member positioned on said second end of said first
longitudinally extending member, said first longitudinally extending
member having an opening extending from said second end towards
25 said first end, said first engagement member having a first engagement
surface;

(c) said second longitudinally extending member being slideably
positioned within said first longitudinally extending member with
said first end of said second longitudinally extending member
30 positioned within said first longitudinally extending member, said





WO 97/07715

THIS SHEET HAS BEEN
REPLACED

PCT/CA96/00566

-50-

first engagement means further comprises a second engagement member positioned on said second end and having a third engagement surface drivingly engaged by said first engagement surface as said button travels between first and second positions to rotate said
5 second longitudinally extending member at least part way around said axis;

(d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first and second longitudinally extending members, said opening having an inner
10 surface and said second engagement means is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement means to undergo a rotational movement to alternately secure said button in said first and second positions.

15

7. The chair as claimed in claim 6 wherein

(a) said second engagement means comprises a plurality of first and second longitudinally extending channels extending from said first end towards said second end and spaced periodically around said
20 surface, each of said second channels positioned between a pair of first channels, said second channels being further recessed into said surface than said first channels;

(b) said first engagement member having a plurality of first protrusions dimensioned to be received in said first channels and
25 positioned to be received in said first and second channels;

(c) said second engagement member having a plurality of second protrusions dimensioned to be received in said second channels and positioned to be received in said second channels; and,

(d) cam means positioned on said inner surface adjacent said
30 first end to engage said first and second protrusions and align said first protrusions with said first and second channels and said second protrusions and with said second channels.

This Sheet Has Been Replaced



AMENDED SHEET (ARTICLE 19)

REPLACEMENT SHEET

27 JAN 1997



WO 97/07715


PCT/CA96/00566

-51-

8. The chair as claimed in claim 3 wherein said actuating means includes adjustment means for adjusting the length of said flexible cable means.

- 5 9. A seating unit comprising:
- (a) a support member;
 - (b) a seat member pivotally mounted on said support member;
 - (c) an arm rest member, said arm rest member including a housing;
 - 10 (d) button means receivable in said housing and moveable longitudinally between a first position and a second position, said button means including locking means for alternately maintaining said button means in said first and second positions;
 - 15 (e) a cylinder having actuating means and operatively connected to said seat member for adjustment of the inclination thereof; and,
 - (f) flexible cable means having a first end connected to said button means and a second end operatively connected to said
 - 20 actuating means
- whereby, when said button means is moved from said first position to said second position, said actuating means is actuated so that the inclination of the seat member may be adjusted and when said button means is moved from said second position to said first position, the
- 25 inclination of the seat member is fixed.

10. The seating unit as claimed in claim 10 wherein said cylinder means is a non-pressurized cylinder.

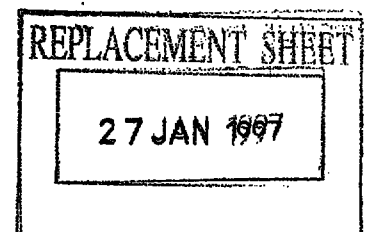

This Sheet Has Been Replaced



AMENDED SHEET (ARTICLE 19)

1/10

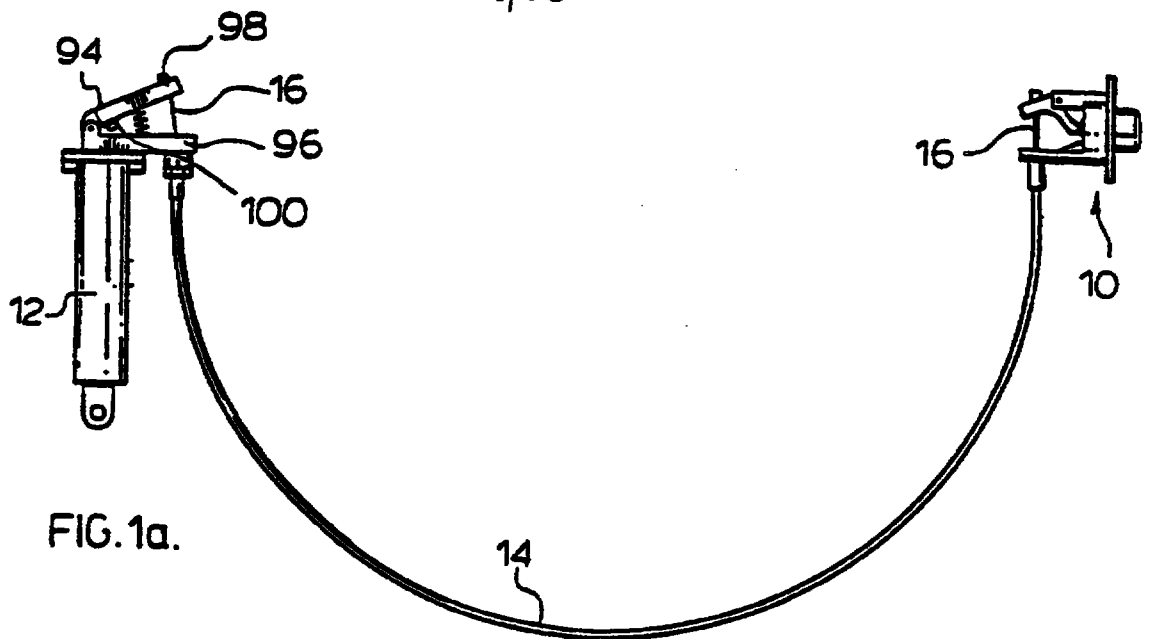


FIG. 1a.

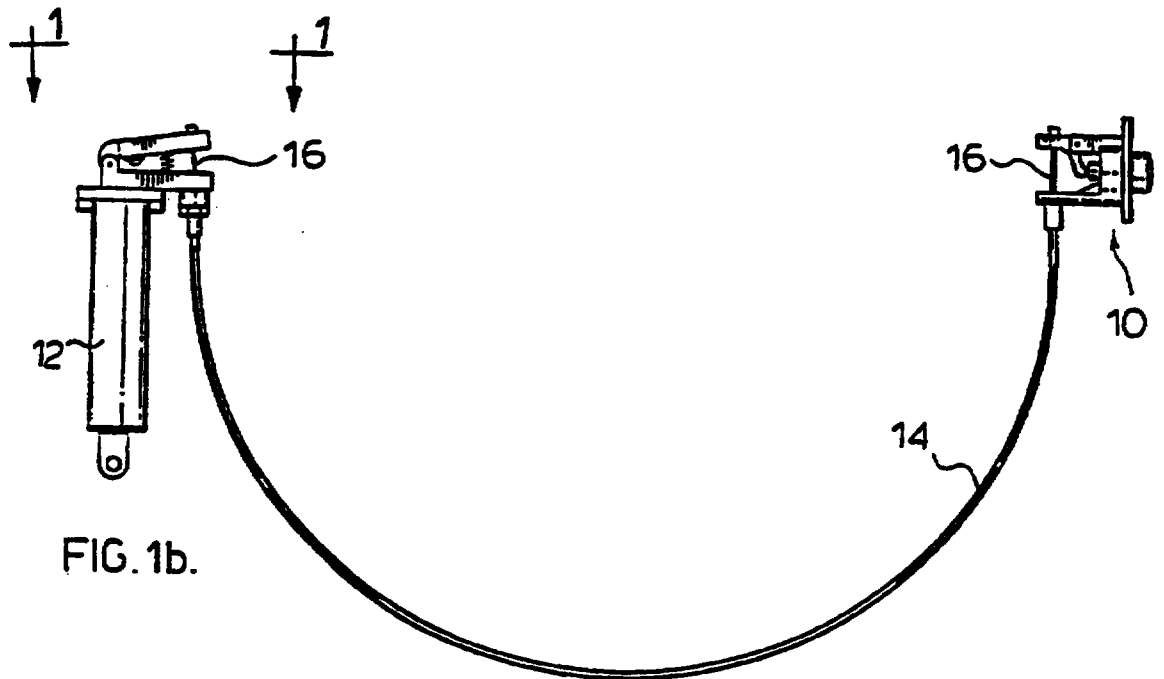


FIG. 1b.

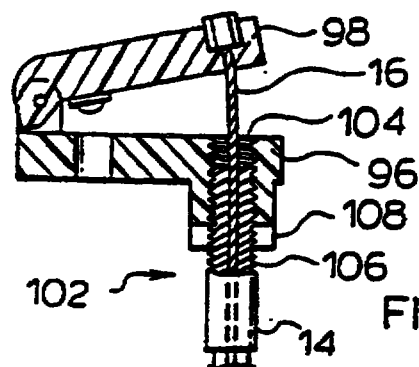


FIG. 1c.

2/10

FIG. 2.




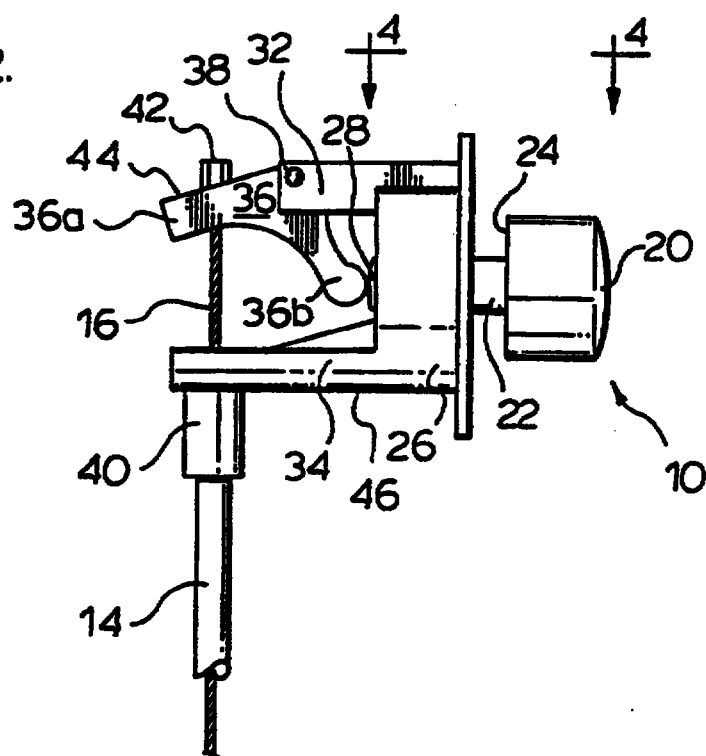


FIG. 3.

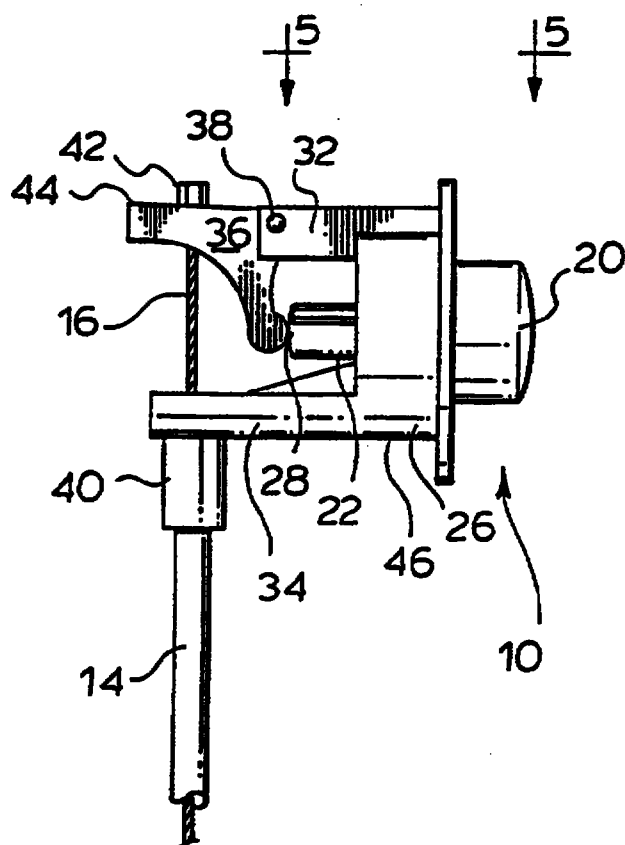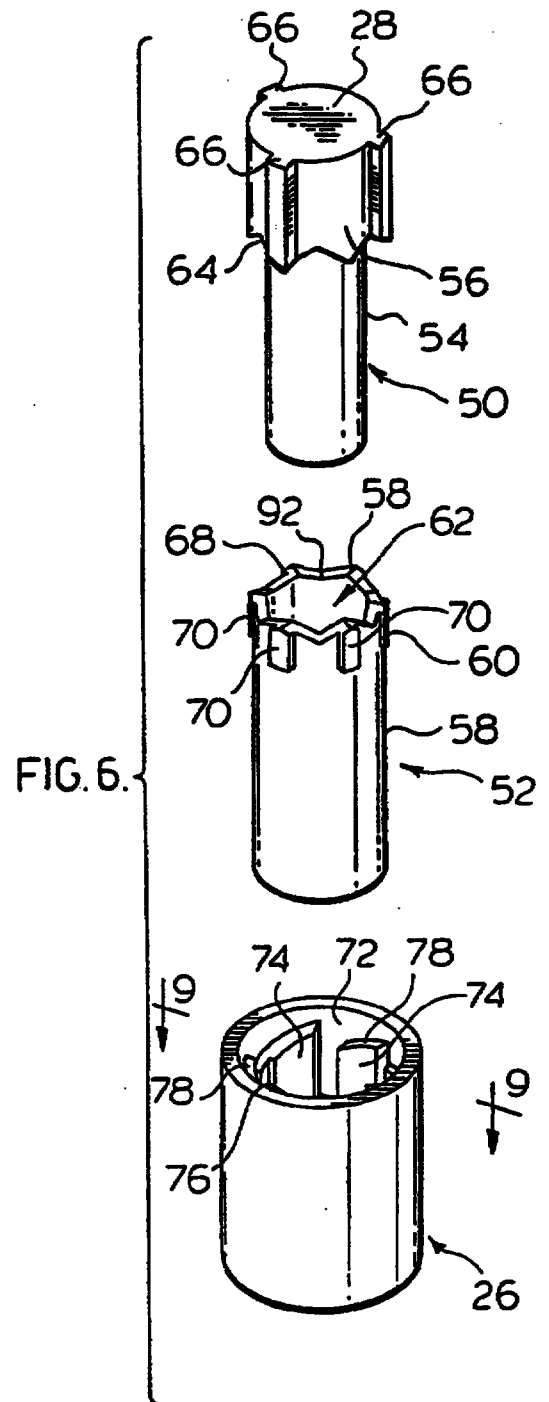

3/10

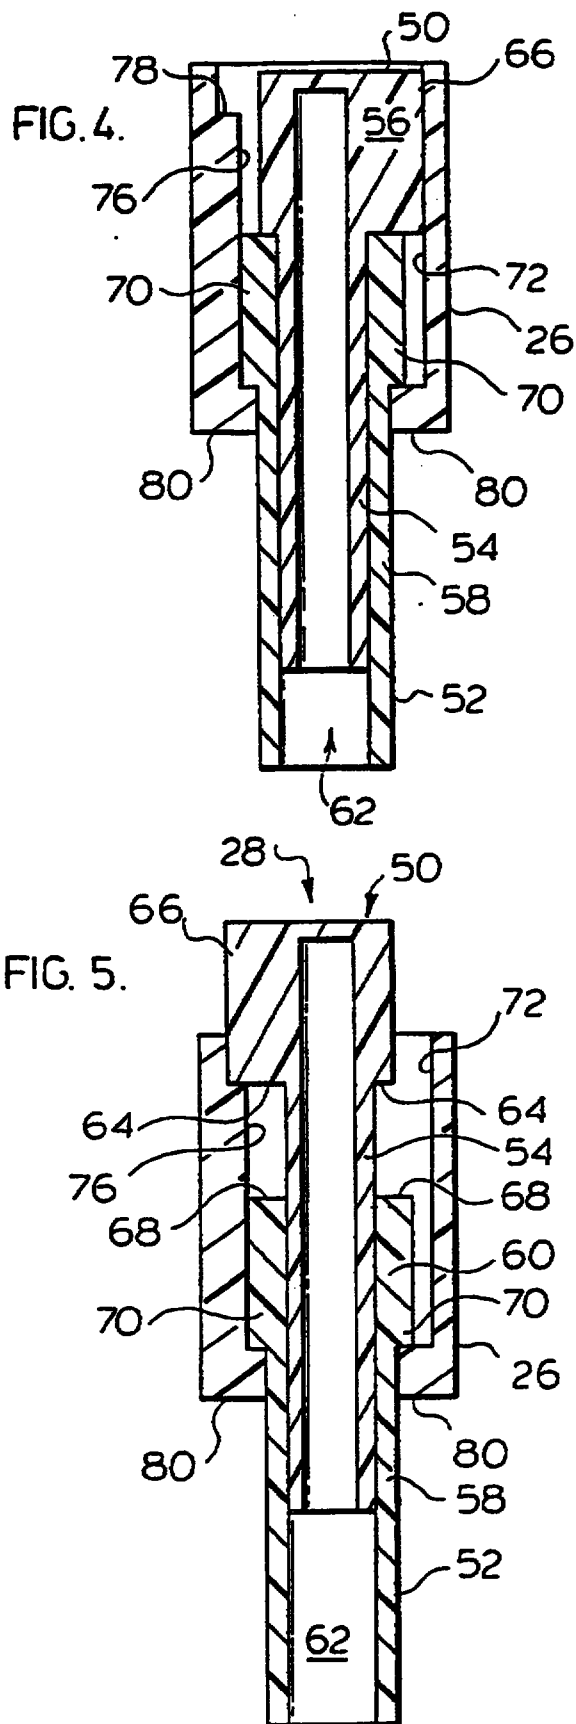

4/10

FIG. 7a.

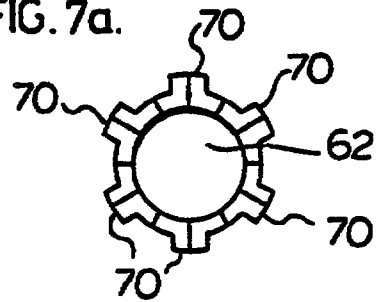


FIG. 8a.






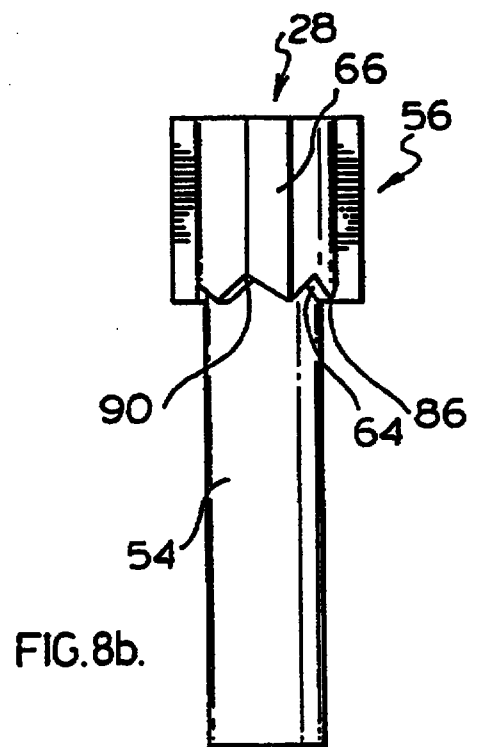


FIG. 9a.

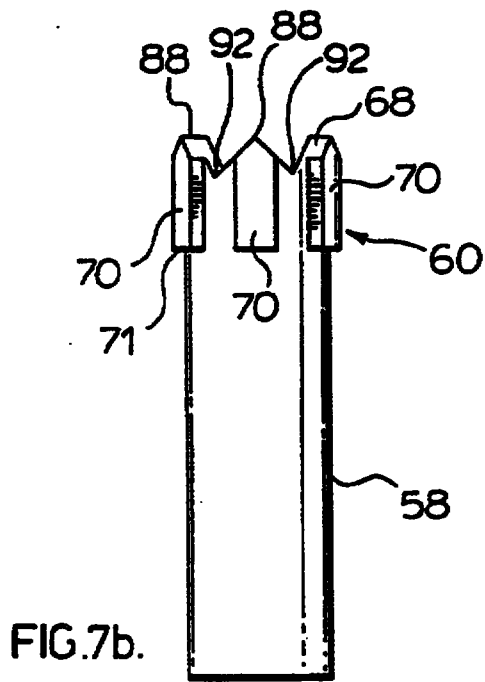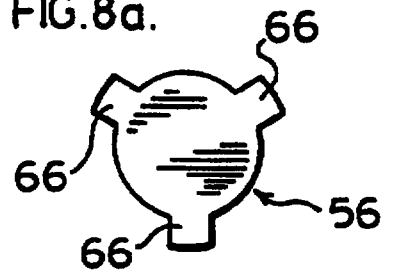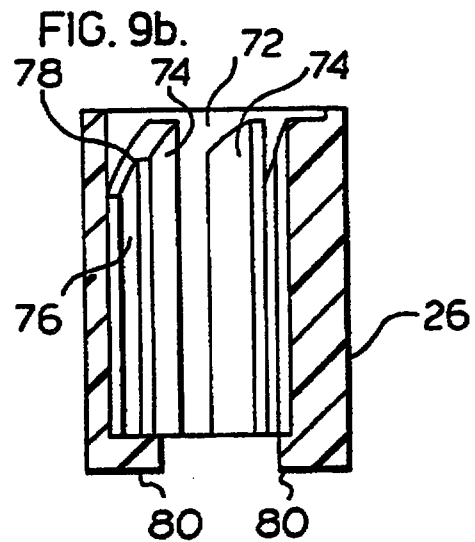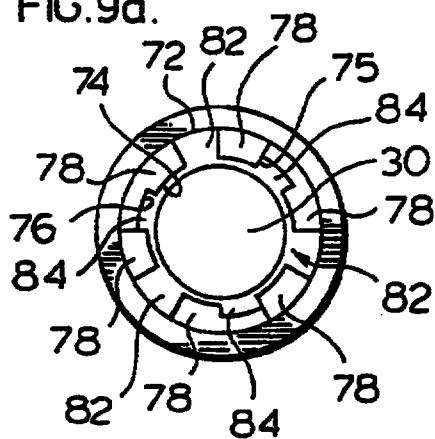

5/10

FIG.10.

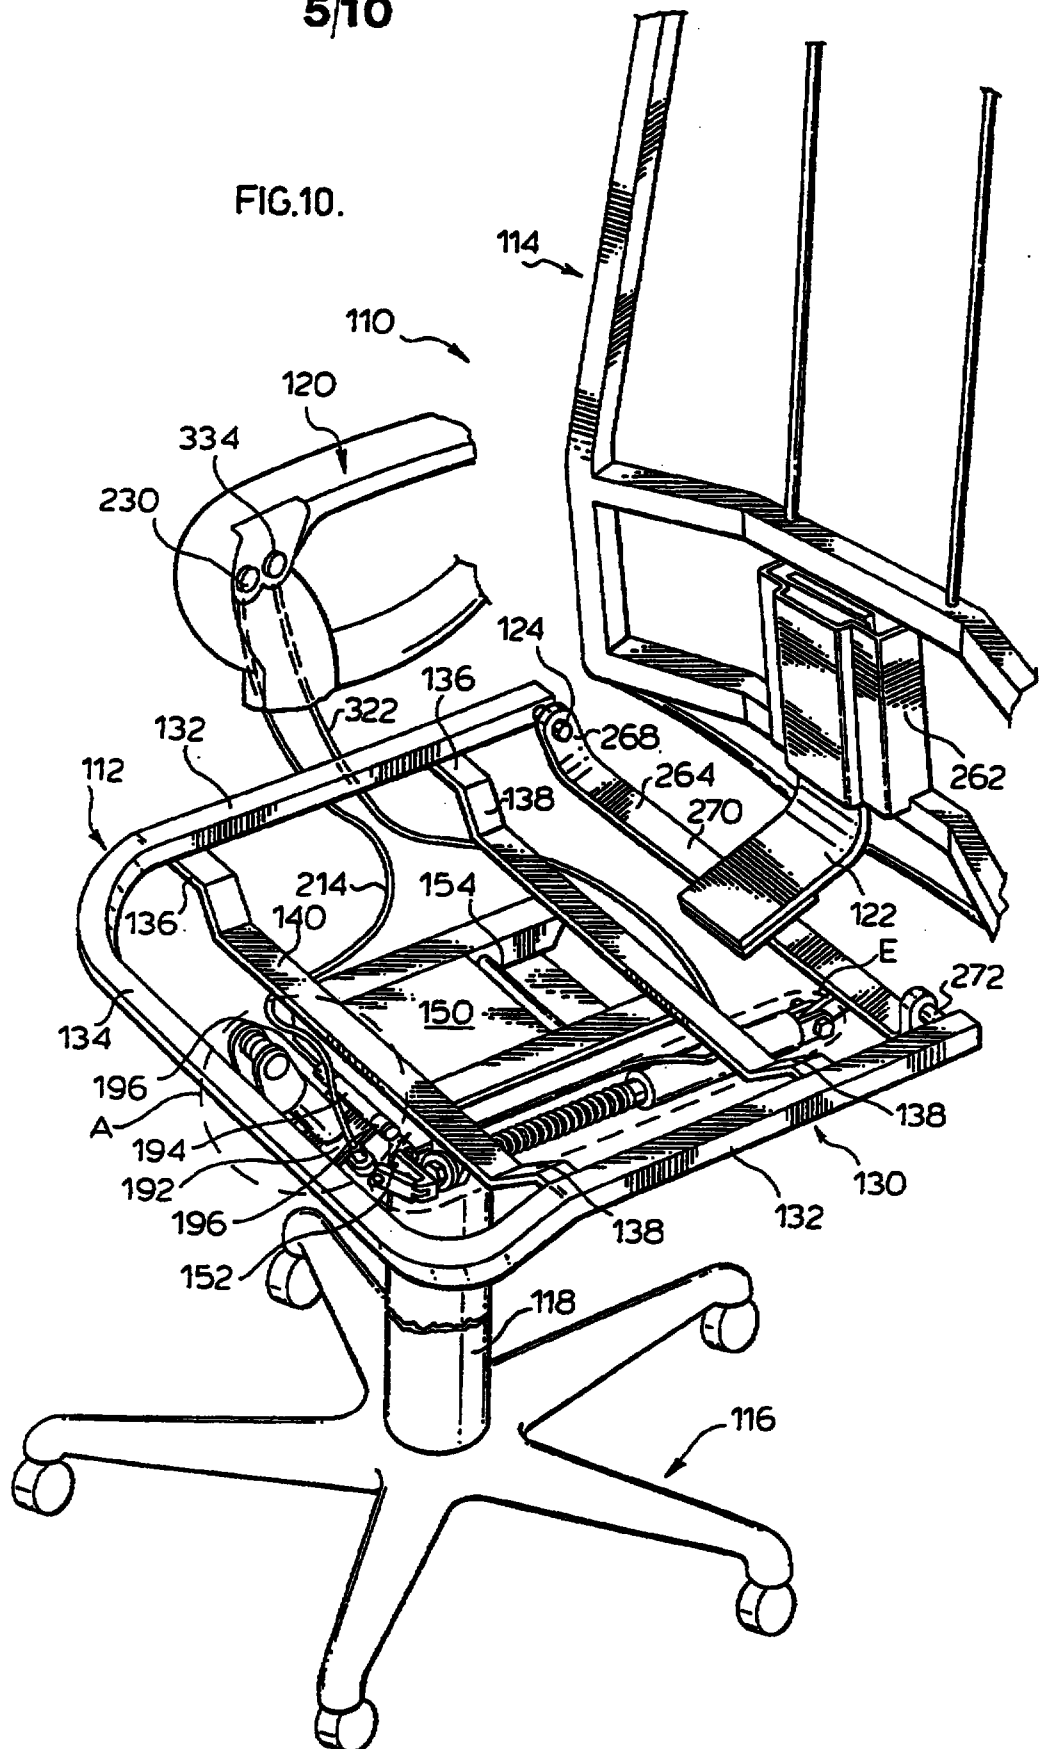

6/10

FIG. 11.



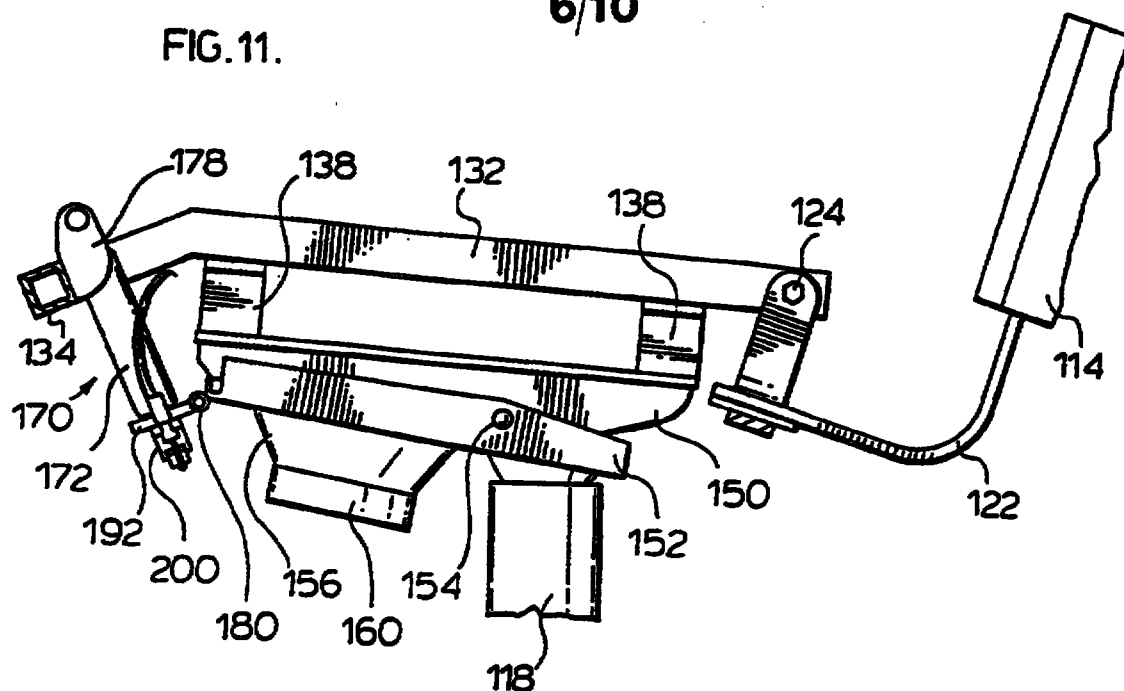



FIG.12.

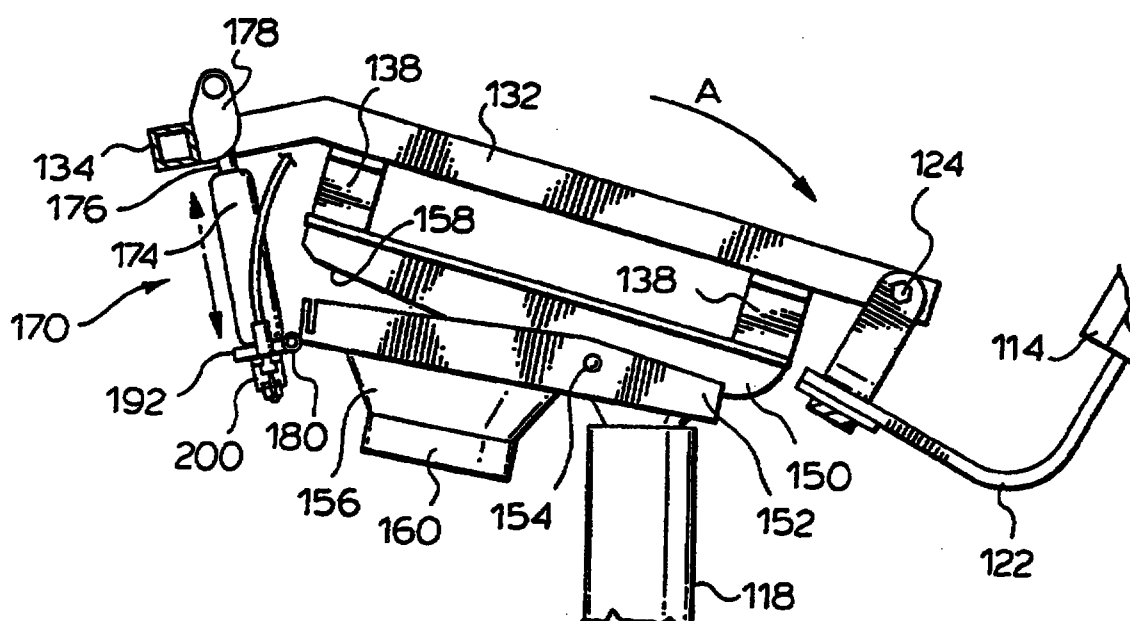

8/10

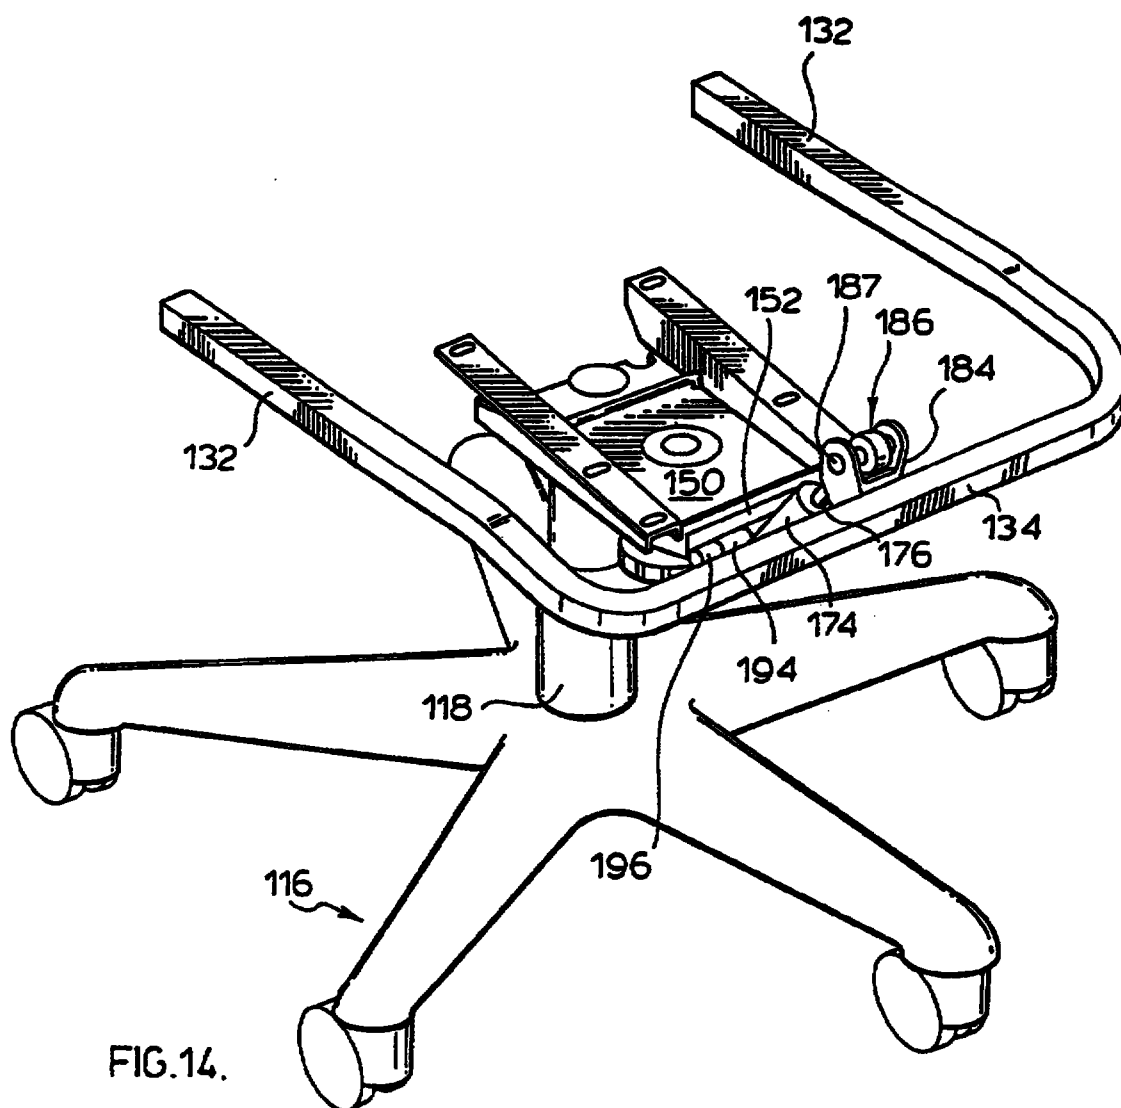

9/10

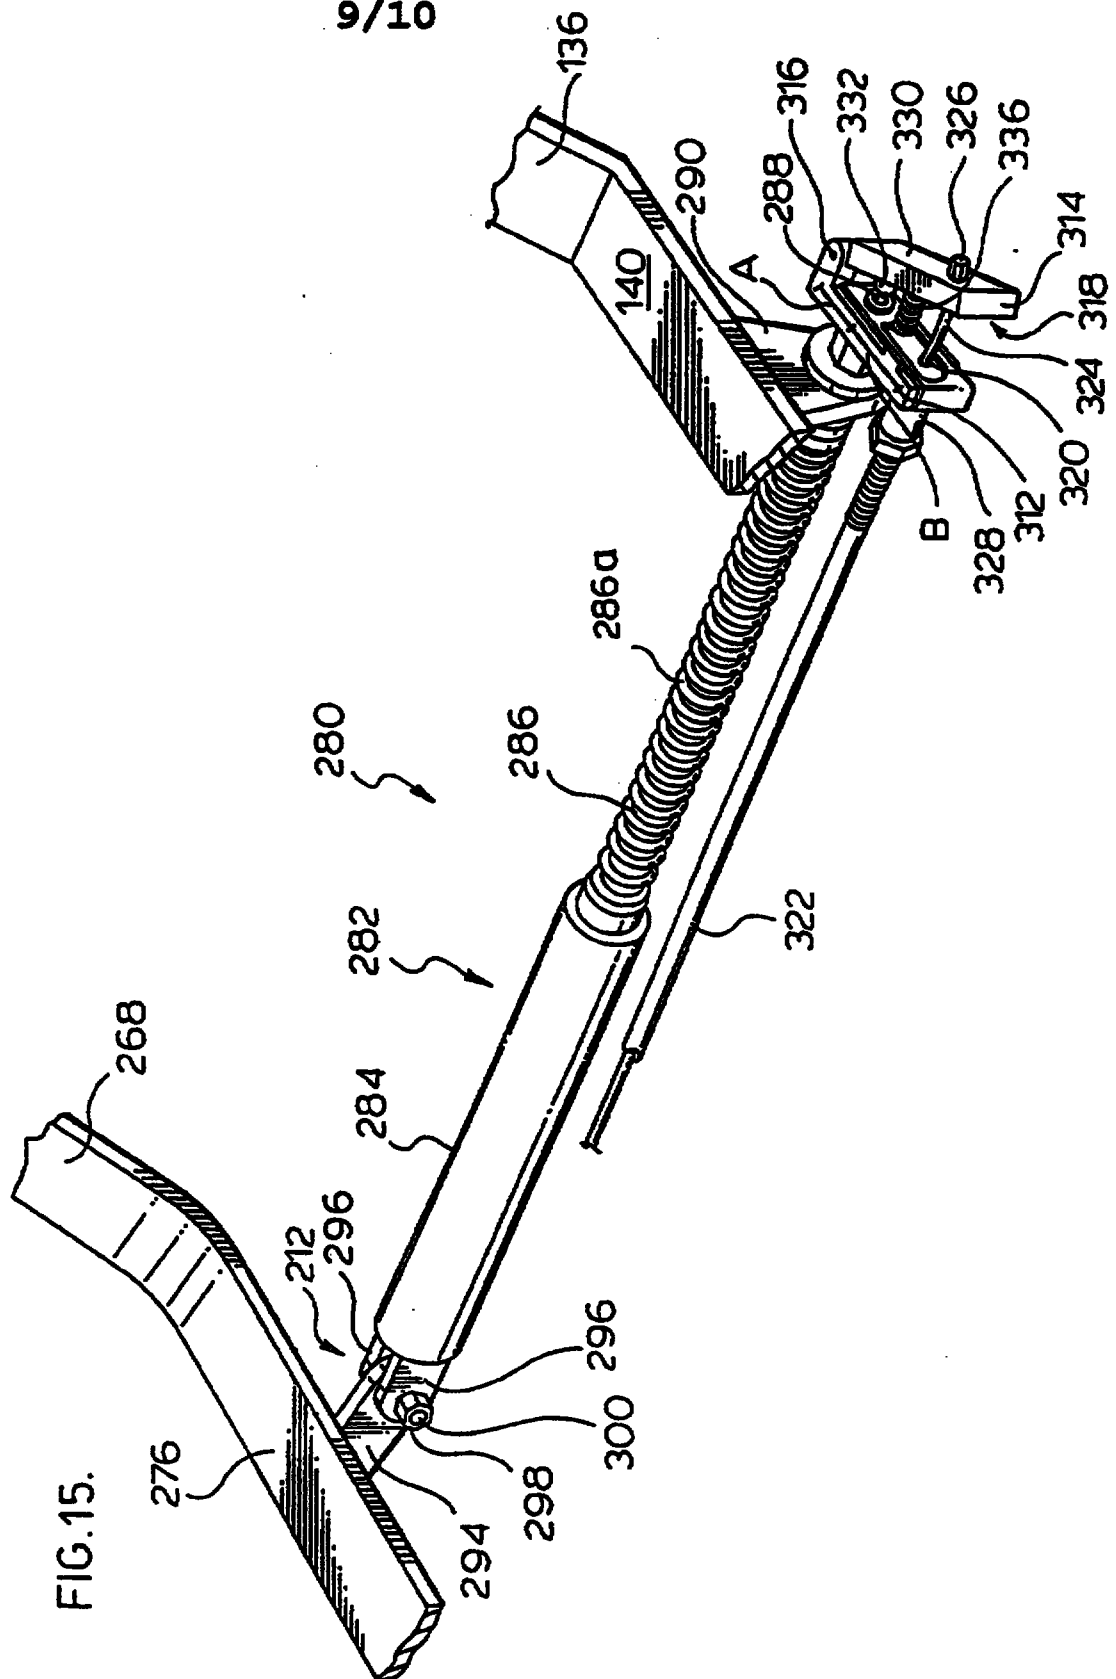

10/10

FIG.16.


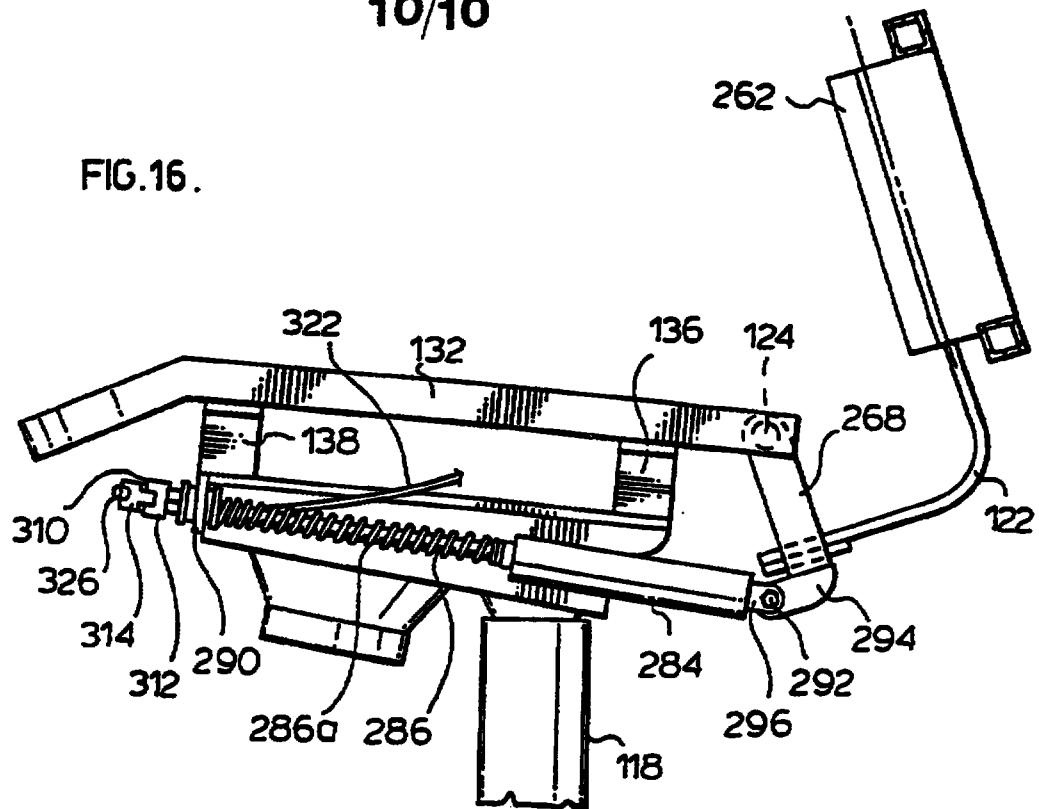


FIG.17.

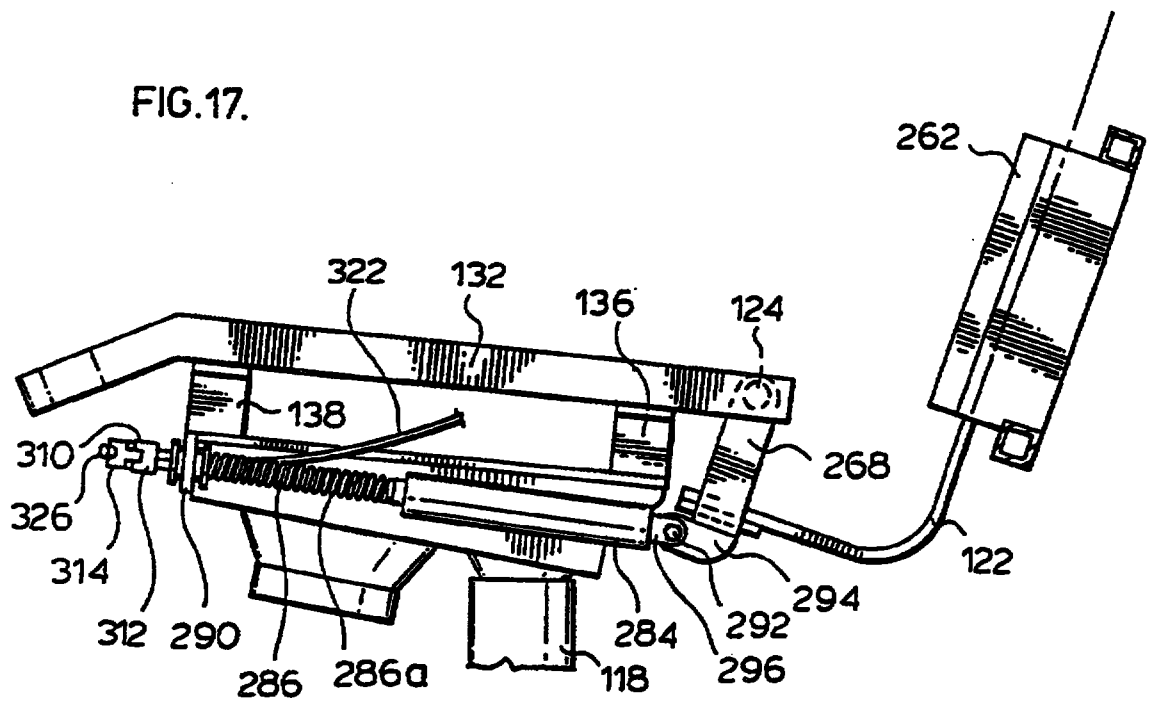

REPLACED SHEETS		SG
☐ Description	: paged to paged	
☒ Claim(s)	: paged <u>34</u> to paged <u>43</u>	
☐ Drawing(s)	: paged to paged	
☐ Abstract	: paged to paged	

operator must move the actuating lever to the actuating position and hold the lever in that position while sitting in the chair so as to set the chair in the desired position. As this may require the operator to bend or stoop over, it is difficult to set the inclination of the chair accurately. This is also problematic if the operator has a back problem which prevents such movement.


Nelson (United States patent no. 4,595,237) discloses an actuating control for a seat height adjustment mechanism. The mechanism of Nelson uses a pivotally mounted lever positioned on the bottom of the seat number. Nelson still requires users to extend their arm downwardly beneath the seat to actuate the lever.

European Patent Application No. 0 329 455 discloses a device for adjusting and locking the inclination of a back rest of a, for example, air craft seat. The apparatus comprises a gas compression spring which is actuated by a button.

German Application DE-A-4 114 101 discloses a release device for a chair. The release device utilizes a longitudinally extending handle which is mounted beneath the seat of a chair and which projects outwardly therefrom. The handle actuates a Bowden cable which in turn actuates a pneumatic spring for a chair.


SUMMARY OF THE PRESENT INVENTION


In accordance with one embodiment of the instant invention, there is provided an actuator apparatus for actuating a positioning linkage including cylinder means in a seating unit receiving the actuator apparatus. The actuator apparatus comprises a housing adapted for mounting in the arm of a seating unit; button means receivable in the housing and moveable longitudinally between a first position and a second position, the button means

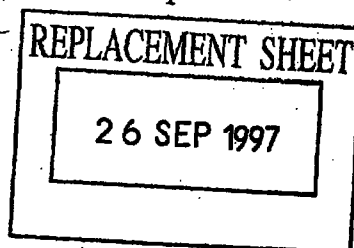

AMENDED SHEET

including locking means for alternately maintaining the button means in the first and second positions; actuating means for moveable portion; flexible cable means having a first end connected
5 to the button means and a second end operatively connected to the actuating means, whereby, when the button means is moved from the first position to the second position, the actuating means is actuated so that the moveable portion of the cylinder means may be adjusted relative to the stationary portion, and when the button
10 means is moved from the second position to the first position, the moveable portion of the cylinder means is fixed relative to the stationary portion.

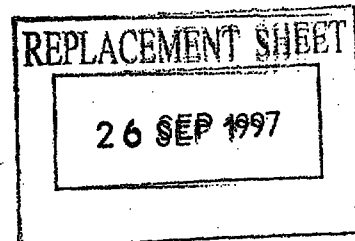


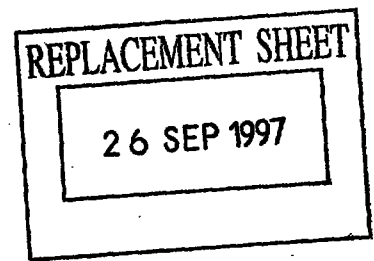

I CLAIM:

1. A movable chair having a base adapted for movement across the surface on which the chair is situated, a seat member, a support member extending between the base and the seat member, the chair
5 having a movable portion and a stationary portion, the chair comprising:
- (a) a mechanical actuator positioned proximate a surface of the chair and accessible to a person while seated upright in the chair, said actuator being movable between a first position and
10 a second position by a force applied by the hand of a user while seated in the chair, said actuator including a locking member for alternately maintaining said actuator in said first and second positions;
 - (b) a retaining member for retaining said movable portion of the chair in either of at least two positions providing different
15 configurations of the chair, said retaining member being releasable to permit said moveable portion to move between said at least two positions; and,
 - (c) a mechanical coupling member having a first end
20 connected to said actuator and a second end operatively connected to said retaining member
- whereby, when said actuator is moved from said first position to said second position, said retaining member is actuated so that the moveable portion of said chair may be adjusted relative to the
25 stationary portion, and when said actuator is moved from said second position to said first position, the moveable portion of the chair is fixed relative to the stationary portion.
2. The chair as claimed in claim 1 wherein said actuator comprises an actuator button which is mounted in a housing and
30 comprises a longitudinally extending shaft member and said locking



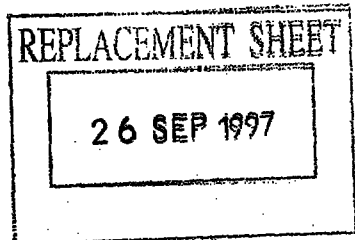

member comprises a first engagement member positioned on said shaft and a second engagement member provided in said housing for engaging said first engagement member.

3. The chair as claimed in claim 2 wherein said housing has a
5 longitudinally extending opening having an inner surface and said second engagement member is provided on said inner surface whereby movement of said actuator button from said first position to said second position causes said first engagement member to undergo a rotational movement to alternately secure said actuator button in
10 said first and second positions.

4. The chair as claimed in claim 3 wherein said shaft member comprises an outer shaft member and an inner shaft member, said first engagement member comprises first and second engagement portions provided on said outer and inner shaft members.


15 5. The chair as claimed in claim 3 wherein

(a) said shaft member comprises first and second longitudinally extending members each having first and second ends and defining a longitudinally extending axis;

(b) said first end of said first longitudinally extending member
20 adapted to receive a button, said first engagement member comprises a first engagement portion positioned on said second end of said first longitudinally extending member, said first longitudinally extending member having an opening extending from said second end towards said first end, said first engagement portion having a first engagement
25 surface;

(c) said second longitudinally extending member being slideably positioned within said first longitudinally extending member with said first end of said second longitudinally extending member positioned within said first longitudinally extending member, said





- 36 -

first engagement member further comprises a second engagement portion positioned on said second end of said second longitudinally extending member and having a second engagement surface drivingly engaged by said first engagement surface as said button travels between
5 said first and second positions to rotate said second longitudinally extending member at least part way around said axis;

(d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first and second longitudinally extending members, said opening having
10 an inner surface and said second engagement member is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement member to undergo a rotational movement to alternately secure said button in said first and second positions.

15 6. The chair as claimed in claim 5 wherein

(a) said second engagement member comprises a plurality of first and second longitudinally extending channels extending from said first end towards said second end and spaced periodically around said inner surface, each of said second channels positioned between a
20 pair of first channels, said second channels being further recessed into said inner surface than said first channels;

(b) said first engagement portion having a plurality of first protrusions dimensioned to be received in said first channels and positioned to be received in said first and second channels;

25 (c) said second engagement portion having a plurality of second protrusions dimensioned to be received in said first channels and positioned to be received in said first channels; and,

(d) a cam member positioned on said inner surface adjacent said first end to engage said first and second protrusions and align said
30 first protrusions with said first and second channels and said second protrusions and with said first channels.

This Sheet Has Been Replaced




AMENDED SHEET



* C L M S *

- 37 -



7. The chair as claimed in claim 1 wherein said actuator comprises a lever which acts on said coupling member, said lever being movable between a first position and a second position for actuation of said coupling member.
- 5 8. The chair as claimed in claim 7 wherein said mechanical coupling member comprises a pivotally mounted arm member, said arm member and said lever having a moment arms of sufficient length to permit said actuator to move from said first position to said second position by a force applied through a finger of the user when
10 said user is seated in the chair.
9. The chair as claimed in claim 8 wherein said coupling means further comprises a flexible cable.
10. The chair as claimed in claim 1 wherein said retaining member comprises a cylinder.
- 15 11. The chair as claimed in claim 1 wherein said retaining member comprises a cylinder which includes a non-compressible fluid.
- 20 12. The chair as claimed in claim 10 wherein said cylinder includes a telescopically extendable section, a stationary section and a valve, said retaining member further comprising a valve release member which acts on said valve and which is movable between a closed position in which said telescopically extendable section is fixed in position relative to said stationary section and an open position in which said telescopically extendable section is movable relative to said
25 stationary section, said actuator button operatively connected to said valve release member whereby when said actuator button is in said


This Sheet Has Been Replaced



AMENDED SHEET



- 38 -

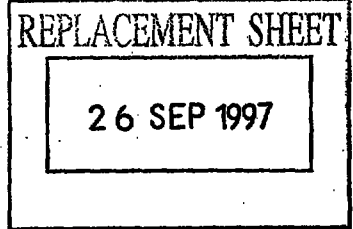


first position, said valve release member is in said closed position, and when said actuator button is in said second position, said valve release member is in said open position.

13. The chair as claimed in claim 1 wherein said chair further
5 comprises an arm member and said actuator is provided on said arm member.
14. The seating unit as claimed in claim 1 wherein said seat member is pivotally mounted on said support member.
15. The seating unit as claimed in claim 14 wherein said retaining
10 member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section and said stationary section is pivotally mounted on said seat member.
16. The seating unit as claimed in claim 15 wherein said cylinder
15 extends upwardly from said support member to said seat member.
17. The seating unit as claimed in claim 1 further comprising a back member, said back member pivotally mounted with respect to said seat member for movement of said back member between an
20 upright position and a reclined position.
18. The seating unit as claimed in claim 17 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back
25 member.

This Sheet Has Been Replaced



AMENDED SHEET

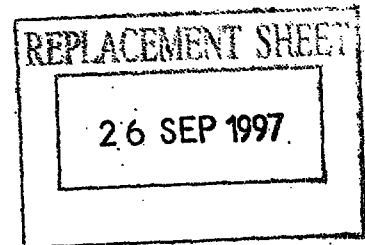


- 39 -

19. The seating unit as claimed in claim 18 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.
- 5 20. The seating unit as claimed in claim 18 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.
- 10 21. A work chair having a base adapted for movement across the surface on which the chair is situated, a seat member, a support member extending between the base and the seat member, the chair having a movable portion and a stationary portion, the chair comprising:
- 15 (a) an mechanical actuator positioned proximate a surface of the chair and accessible to a person while seated upright in the chair, said actuator being movable between a first position and a second position by a force applied by the hand of a user while seated in the chair;
- 20 (b) a retaining member for retaining said movable portion of the chair in either of at least two positions providing different configurations of the chair, said retaining member being releasable to permit said moveable portion to move between said at least two positions; and,
- 25 (c) a mechanical coupling member having a first end connected to said actuator and a second end operatively connected to said retaining member

This Sheet Has Been Replaced



AMENDED SHEET

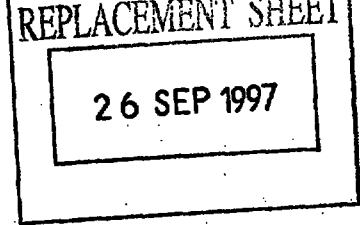

whereby, when said actuator is moved from said first position to said second position, said retaining member is actuated so that the movable portion of said chair may be adjusted relative to the stationary portion, and when said actuator is moved from said second position to said first position, the movable portion of the chair is fixed relative to the stationary portion.

22. The chair as claimed in claim 21 wherein said actuator comprises a lever which acts on said coupling member, said lever being movable between a first position and a second position for actuation of said coupling member.


23. The chair as claimed in claim 22 wherein said actuator further comprises a button mounted in a housing, said button being movable between a first position and a second position, said button being drivingly connected to said lever to move said lever between its first and second positions as said button moves between its first and second positions.

24. The chair as claimed in claim 21 wherein said chair has a plurality of movable portions, each having an associated retaining member with each retaining member being operable an actuator.

25. The chair as claimed in claim 21 wherein said retaining member comprises a cylinder.

26. The chair as claimed in claim 25 wherein said cylinder includes a telescopically extendable section, a stationary section and a valve, said retaining member further comprising a valve release member which acts on said valve and which is movable between a closed position in which said telescopically extendable section is fixed



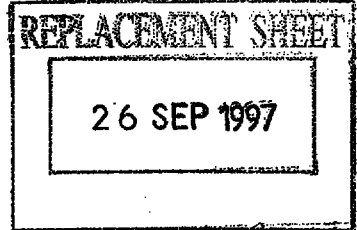

- 41 -

in position relative to said stationary section and an open position in which said telescopically extendable section is movable relative to said stationary section, said actuator operatively connected to said valve release member and movable between a first position, in which said
5 valve release member is in said closed position, and a second position, in which said valve release member is in said open position.

27. The chair as claimed in claim 26 wherein said mechanical coupling member comprises an arm member pivotally mounted with respect to said valve release member, said arm member having a
10 moment arm of sufficient length to permit said actuator to move from said first position to said second position by a force applied through a finger of the user when said user is seated in the chair.

28. The chair as claimed in claim 27 wherein said coupling means further comprises a flexible cable.

15 29. The chair as claimed in claim 21 wherein said chair further comprises an arm member and said actuator is provided in said arm member.

30. The seating unit as claimed in claim 21 wherein said seat member is pivotally mounted on said support member.

20 31. The seating unit as claimed in claim 30 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section
25 and said stationary section is pivotally mounted on said seat member.


This Sheet Has Been Replaced



AMENDED SHEET



- 42 -

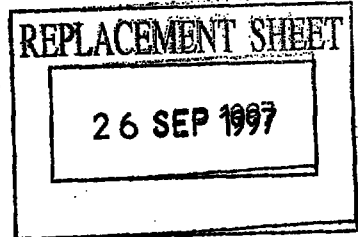

32. The seating unit as claimed in claim 31 wherein said cylinder extends upwardly from said support member to said seat member.
33. The seating unit as claimed in claim 21 further comprising locking means for alternately maintaining said button means in said first and second positions.
34. The seating unit as claimed in claim 21 further comprising a back member, said back member pivotally mounted with respect to said seat member for movement of said back member between an upright position and a reclined position.
35. The seating unit as claimed in claim 34 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back member.
36. The seating unit as claimed in claim 35 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.
37. The seating unit as claimed in claim 35 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.
38. The chair as claimed in claim 22 wherein said mechanical coupling member comprises a pivotally mounted arm member, said


This Sheet Has Been Replaced



AMENDED SHEET



- 43 -

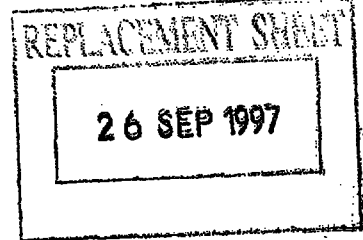

arm member and said lever having a moment arms of sufficient length to permit said actuator to move from said first position to said second position by a force applied through a finger of the user when said user is seated in the chair.

This Sheet Has Been Replaced



AMENDED SHEET

**REPLACEMENT SHEET****23 FEB 1999**


33

REPLACEMENT SHEETS SG

- ☐ Description : paged to paged
☒ Claim(s) : paged 33 to paged 55.....
☐ Drawing(s) : paged to paged
☐ Abstract : paged to paged

DATE OF RECEIPT 03/01/99**I CLAIM:**

1. A movable chair having a base adapted for movement across the surface on which the chair is situated, a seat member, a support member extending between the base and the seat member, the chair having a movable portion and a stationary portion, the chair comprising:
- 5
- 10 (a) a mechanical actuator positioned proximate a surface of the chair and accessible to a person while seated upright in the chair, said actuator being movable between a first position and a second position by a force applied by the hand of a user while seated in the chair, said actuator including a locking member for alternately maintaining said actuator in said first and second positions;
- 15 (b) a retaining member for retaining said movable portion of the chair in either of at least two positions providing different configurations of the chair, said retaining member being releasable to permit said moveable portion to move between said at least two positions; and,
- 20 (c) a mechanical coupling member having a first end connected to said actuator and a second end operatively connected to said retaining member
- whereby, when said actuator is moved from said first position to said second position, said retaining member is actuated so that the moveable portion of said chair may be adjusted relative to the stationary portion, and when said actuator is moved from said second position to said first position, the moveable portion of the chair is fixed relative to the stationary portion.
- 25
- 30 2. The chair as claimed in claim 1 wherein said locking member comprises an engagement member associated with said actuator for alternately maintaining said actuator in said first and second positions.



3. The chair as claimed in claim 2 wherein said actuator travels inwardly in the direction of the chair as the actuator travels from said first position to said second position.

5

4. The chair as claimed in claim 1 wherein said actuator comprises an actuator button which is mounted in a housing and comprises a longitudinally extending shaft member and said locking member comprises a first engagement member positioned on said shaft and a
10 second engagement member provided in said housing for engaging said first engagement member.

5. The chair as claimed in claim 2 wherein said housing has a longitudinally extending opening having an inner surface and said
15 second engagement member is provided on said inner surface whereby movement of said actuator button from said first position to said second position causes said first engagement member to undergo a rotational movement to alternately secure said actuator button in said first and second positions.

20

6. The chair as claimed in claim 5 wherein said shaft member comprises an outer shaft member and an inner shaft member, said first engagement member comprises first and second engagement portions provided on said outer and inner shaft members.

25

7. The chair as claimed in claim 5 wherein

(a) said shaft member comprises first and second longitudinally extending members each having first and second ends and defining a longitudinally extending axis;

30 (b) said first end of said first longitudinally extending member adapted to receive a button, said first engagement member comprises a first engagement portion positioned on said second end of said first



longitudinally extending member, said first longitudinally extending member having an opening extending from said second end towards said first end, said first engagement portion having a first engagement surface;


5 (c) said second longitudinally extending member being slideably positioned within said first longitudinally extending member with said first end of said second longitudinally extending member positioned within said first longitudinally extending member, said first engagement member further comprises a second engagement
10 portion positioned on said second end of said second longitudinally extending member and having a second engagement surface drivingly engaged by said first engagement surface as said button travels between said first and second positions to rotate said second longitudinally
 extending member at least part way around said axis;

15 (d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first and second longitudinally extending members, said opening having an inner surface and said second engagement member is provided on said inner surface whereby movement of said button from said first position to
20 said second position causes said first engagement member to undergo a rotational movement to alternately secure said button in said first and second positions.

8. The chair as claimed in claim 7 wherein

25 (a) said second engagement member comprises a plurality of first and second longitudinally extending channels extending from said first end towards said second end and spaced periodically around said inner surface, each of said second channels positioned between a pair of first channels, said second channels being further recessed into
30 said inner surface than said first channels;

 (b) said first engagement portion having a plurality of first protrusions dimensioned to be received in said first channels and

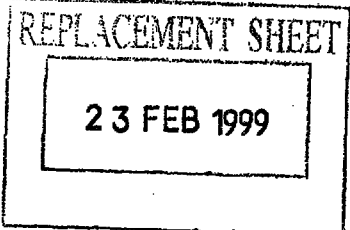

positioned to be received in said first and second channels;

(c) said second engagement portion having a plurality of second protrusions dimensioned to be received in said first channels and positioned to be received in said first channels; and,

5 (d) a cam member positioned on said inner surface adjacent said first end to engage said first and second protrusions and align said first protrusions with said first and second channels and said second protrusions and with said first channels.

10 9. The chair as claimed in claim 1 wherein said actuator comprises a lever which acts on said coupling member, said lever being movable between a first position and a second position for actuation of said coupling member.

15 10. The chair as claimed in claim 9 wherein said mechanical coupling member comprises a pivotally mounted arm member, said arm member and said lever having a moment arms of sufficient length to permit said actuator to move from said first position to said second position by a force applied through a finger of the user when
20 said user is seated in the chair.

11. The chair as claimed in claim 10 wherein said coupling means further comprises a flexible cable.

25 12. The chair as claimed in claim 1 wherein said retaining member comprises a cylinder.

13. The chair as claimed in claim 1 wherein said retaining member comprises a cylinder which includes a non-compressible fluid.

30

14. The chair as claimed in claim 12 wherein said cylinder includes a telescopically extendable section, a stationary section and a valve,



23 FEB 1999

said retaining member further comprising a valve release member which acts on said valve and which is movable between a closed position in which said telescopically extendable section is fixed in position relative to said stationary section and an open position in
5 which said telescopically extendable section is movable relative to said stationary section, said actuator button operatively connected to said valve release member whereby when said actuator button is in said first position, said valve release member is in said closed position, and
10 when said actuator button is in said second position, said valve release member is in said open position.


15 15. The chair as claimed in claim 1 wherein said chair further comprises an arm member and said actuator is provided on said arm member.

16. The seating unit as claimed in claim 1 wherein said seat member is pivotally mounted on said support member.

20 17. The seating unit as claimed in claim 16 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section and said stationary section is pivotally mounted on said seat member.

25 18. The seating unit as claimed in claim 17 wherein said cylinder extends upwardly from said support member to said seat member.

30 19. The seating unit as claimed in claim 1 further comprising a back member, said back member pivotally mounted with respect to said seat member for movement of said back member between an upright

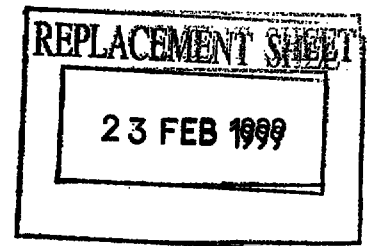

position and a reclined position.

20. The seating unit as claimed in claim 19 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back member.


21. The seating unit as claimed in claim 20 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.

22. The seating unit as claimed in claim 20 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.

23. A work chair having a base adapted for movement across the surface on which the chair is situated, a seat member, a support member extending between the base and the seat member, the chair having a movable portion and a stationary portion, the chair comprising:

(a) an mechanical actuator positioned proximate a surface of the chair and accessible to a person while seated upright in the chair, said actuator being movable between a first position and a second position by a force applied by the hand of a user while seated in the chair;

(b) a retaining member for retaining said movable portion of the chair in either of at least two positions providing different

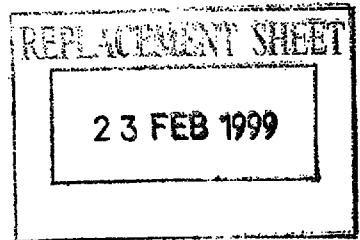

configurations of the chair, said retaining member being releasable to permit said moveable portion to move between said at least two positions; and,

- 5 (c) a mechanical coupling member having a first end connected to said actuator and a second end operatively connected to said retaining member


whereby, when said actuator is moved from said first position to said second position, said retaining member is actuated so that the movable portion of said chair may be adjusted relative to the stationary portion,
10 and when said actuator is moved from said second position to said first position, the movable portion of the chair is fixed relative to the stationary portion.

24. The chair as claimed in claim 23 wherein said actuator
15 comprises a lever which acts on said coupling member, said lever being movable between a first position and a second position for actuation of said coupling member.


25. The chair as claimed in claim 24 wherein said actuator further
20 comprises a button movable between a first position and a second position, said button being drivingly connected to said lever to move said lever between its first and second positions as said button moves between its first and second positions.

- 25 26. The chair as claimed in claim 25 wherein said chair has a plurality of movable portions, each having an associated retaining member with each retaining member being operable an actuator.

27. The chair as claimed in claim 23 wherein said retaining member
30 comprises a cylinder.

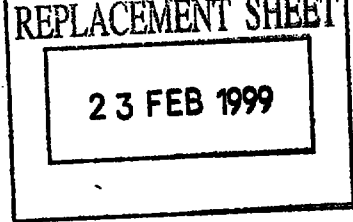

28. The chair as claimed in claim 27 wherein said cylinder includes a telescopically extendable section, a stationary section and a valve, said retaining member further comprising a valve release member which acts on said valve and which is movable between a closed position in which said telescopically extendable section is fixed in position relative to said stationary section and an open position in which said telescopically extendable section is movable relative to said stationary section, said actuator operatively connected to said valve release member and movable between a first position, in which said valve release member is in said closed position, and a second position, in which said valve release member is in said open position.
29. The chair as claimed in claim 28 wherein said mechanical coupling member comprises an arm member pivotally mounted with respect to said valve release member, said arm member having a moment arm of sufficient length to permit said actuator to move from said first position to said second position by a force applied through a finger of the user when said user is seated in the chair.
30. The chair as claimed in claim 29 wherein said coupling means further comprises a flexible cable.
31. The chair as claimed in claim 23 wherein said chair further comprises an arm member and said actuator is provided in said arm member.
32. The seating unit as claimed in claim 23 wherein said seat member is pivotally mounted on said support member.
33. The seating unit as claimed in claim 32 wherein said retaining member comprises a cylinder having a telescopically extendable

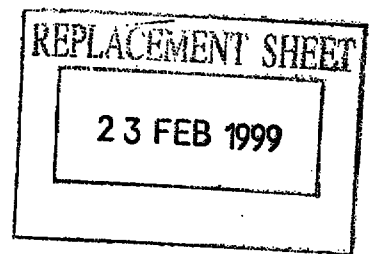

section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section and said stationary section is pivotally mounted on said seat member.

5

34. The seating unit as claimed in claim 33 wherein said cylinder extends upwardly from said support member to said seat member.

10 35. The seating unit as claimed in claim 23 further comprising locking means for alternately maintaining said button means in said first and second positions.

15 36. The seating unit as claimed in claim 23 further comprising a back member, said back member pivotally mounted with respect to said seat member for movement of said back member between an upright position and a reclined position.

20 37. The seating unit as claimed in claim 36 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back member.

25 38. The seating unit as claimed in claim 37 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.

30 39. The seating unit as claimed in claim 37 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and



23 FEB 1999

said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.

5 40. The chair as claimed in claim 24 wherein said mechanical coupling member comprises a pivotally mounted arm member, said arm member and said lever having a moment arms of sufficient length to permit said actuator to move from said first position to said second position by a force applied through a finger of the user when said user is seated in the chair.

10

41. A movable chair having a base adapted for movement across the surface on which the chair is situated, a seat member, a support member extending between the base and the seat member, the chair having a movable portion and a stationary portion, the chair comprising:

15

(a) a button positioned proximate a surface of the chair and accessible to a person while seated upright in the chair, said button being movable between a first position and a second position by a force applied by the hand of a user while seated in the chair, said button including a locking member for alternately maintaining said button in said first and second positions;

20


(b) a retaining member for retaining said movable portion of the chair in either of at least two positions providing different configurations of the chair, said retaining member being releasable to permit said moveable portion to move between said at least two positions; and,

25

(c) a mechanical coupling member having a first end connected to said button and a second end operatively connected to said retaining member

30

whereby, when said button is moved from said first position to said

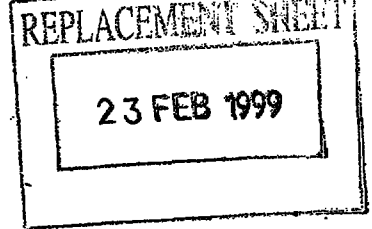

second position, said retaining member is actuated so that the moveable portion of said chair may be adjusted relative to the stationary portion, and when said button is moved from said second position to said first position, the moveable portion of the chair is
5 fixed relative to the stationary portion.

42. The chair as claimed in claim 41 wherein said locking member comprises an engagement member associated with said button for alternately maintaining said button in said first and second positions.
10

43. The chair as claimed in claim 42 wherein said button travels inwardly in the direction of the chair as the button travels from said first position to said second position.

44. The chair as claimed in claim 41 wherein said button is mounted in a housing and comprises a longitudinally extending shaft member and said locking member comprises a first engagement member positioned on said shaft and a second engagement member provided in said housing for engaging said first engagement member.
15

45. The chair as claimed in claim 44 wherein said housing has a longitudinally extending opening having an inner surface and said second engagement member is provided on said inner surface whereby movement of said button from said first position to said
20 second position causes said first engagement member to undergo a rotational movement to alternately secure said button in said first and second positions.

46. The chair as claimed in claim 45 wherein said shaft member comprises an outer shaft member and an inner shaft member, said
25 first engagement member comprises first and second engagement



23 FEB 1999

portions provided on said outer and inner shaft members.


47. The chair as claimed in claim 45 wherein

5 (a) said shaft member comprises first and second longitudinally extending members each having first and second ends and defining a longitudinally extending axis;

10 (b) said first end of said first longitudinally extending member adapted to receive a button, said first engagement member comprises a first engagement portion positioned on said second end of said first longitudinally extending member, said first longitudinally extending member having an opening extending from said second end towards said first end, said first engagement portion having a first engagement surface;

15 (c) said second longitudinally extending member being slideably positioned within said first longitudinally extending member with said first end of said second longitudinally extending member positioned within said first longitudinally extending member, said first engagement member further comprises a second engagement portion positioned on said second end of said second longitudinally extending member and having a second engagement surface drivingly engaged by said first engagement surface as said button travels between said first and second positions to rotate said second longitudinally extending member at least part way around said axis;

20 (d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first and second longitudinally extending members, said opening having an inner surface and said second engagement member is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement member to undergo
25 a rotational movement to alternately secure said button in said first
30 and second positions.

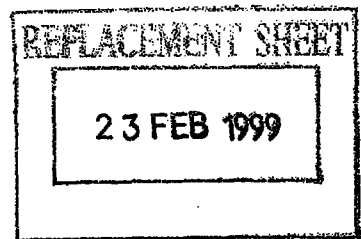

48. The chair as claimed in claim 47 wherein

5 (a) said second engagement member comprises a plurality of first and second longitudinally extending channels extending from said first end towards said second end and spaced periodically around said inner surface, each of said second channels positioned between a pair of first channels, said second channels being further recessed into said inner surface than said first channels;


10 (b) said first engagement portion having a plurality of first protrusions dimensioned to be received in said first channels and positioned to be received in said first and second channels;

(c) said second engagement portion having a plurality of second protrusions dimensioned to be received in said first channels and positioned to be received in said first channels; and,


15 (d) a cam member positioned on said inner surface adjacent said first end to engage said first and second protrusions and align said first protrusions with said first and second channels and said second protrusions and with said first channels.

20 49. The chair as claimed in claim 41 wherein said button includes a lever which acts on said coupling member, said lever being movable between a first position and a second position for actuation of said coupling member.

25 50. The chair as claimed in claim 49 wherein said mechanical coupling member comprises a pivotally mounted arm member, said arm member and said lever having a moment arms of sufficient length to permit said button to move from said first position to said second position by a force applied through a finger of the user when
30 said user is seated in the chair.

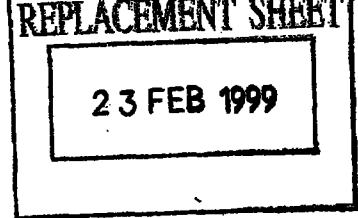

51. The chair as claimed in claim 50 wherein said coupling means further comprises a flexible cable.
52. The chair as claimed in claim 41 wherein said retaining member
5 comprises a cylinder.
53. The chair as claimed in claim 41 wherein said retaining member comprises a cylinder which includes a non-compressible fluid.
- 10 54. The chair as claimed in claim 52 wherein said cylinder includes a telescopically extendable section, a stationary section and a valve, said retaining member further comprising a valve release member which acts on said valve and which is movable between a closed
15 position in which said telescopically extendable section is fixed in position relative to said stationary section and an open position in which said telescopically extendable section is movable relative to said stationary section, said button operatively connected to said valve release member whereby when said button is in said first position, said valve release member is in said closed position, and when said button
20 is in said second position, said valve release member is in said open position.
55. The chair as claimed in claim 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53 or 54 wherein said chair further comprises an arm member
25 and said button is provided on said arm member.
56. The seating unit as claimed in claim 41 wherein said seat member is pivotally mounted on said support member.
- 30 57. The seating unit as claimed in claim 56 wherein said retaining member comprises a cylinder having a telescopically extendable

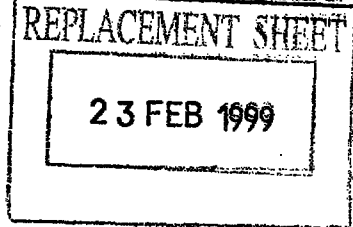

- section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section and said stationary section is pivotally mounted on said seat member.
- 5
58. The seating unit as claimed in claim 57 wherein said cylinder extends upwardly from said support member to said seat member.
- 10
59. The seating unit as claimed in claim 41 further comprising a back member, said back member pivotally mounted with respect to said seat member for movement of said back member between an upright position and a reclined position.
- 15
60. The seating unit as claimed in claim 59 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back member.
- 20
61. The seating unit as claimed in claim 60 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.
- 25
62. The seating unit as claimed in claim 60 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.
- 30
63. A movable chair having a base adapted for movement across



23 FEB 1999

the surface on which the chair is situated, a seat member, an arm, a support member extending between the base and the seat member, the chair having a movable portion and a stationary portion, the chair comprising:

- 5 (a) a mechanical actuator positioned in the arm of the chair, said actuator being movable between a first position and a second position by a force applied by the hand of a user while seated in the chair, said actuator including a locking member for alternately maintaining said actuator in said first and second positions;
- 10 (b) a retaining member for retaining said movable portion of the chair in either of at least two positions providing different configurations of the chair, said retaining member being releasable to permit said moveable portion to move between
- 15 said at least two positions; and,
- (c) a mechanical coupling member having a first end connected to said actuator and a second end operatively connected to said retaining member

whereby, when said actuator is moved from said first position to said


20 second position, said retaining member is actuated so that the moveable portion of said chair may be adjusted relative to the stationary portion, and when said actuator is moved from said second position to said first position, the moveable portion of the chair is fixed relative to the stationary portion.

25

64. The chair as claimed in claim 62 wherein said locking member comprises an engagement member associated with said actuator for alternately maintaining said actuator in said first and second positions.

30

65. The chair as claimed in claim 63 wherein said actuator travels inwardly in the direction of the chair as the actuator travels from said

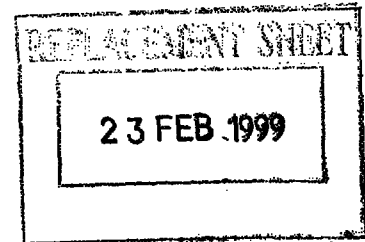

first position to said second position.


5 66. The chair as claimed in claim 62 wherein said actuator comprises an actuator button which is mounted in a housing and comprises a longitudinally extending shaft member and said locking member comprises a first engagement member positioned on said shaft and a second engagement member provided in said housing for engaging said first engagement member.

10 67. The chair as claimed in claim 65 wherein said housing has a longitudinally extending opening having an inner surface and said second engagement member is provided on said inner surface whereby movement of said actuator button from said first position to said second position causes said first engagement member to undergo
15 a rotational movement to alternately secure said actuator button in said first and second positions.

20 68. The chair as claimed in claim 66 wherein said shaft member comprises an outer shaft member and an inner shaft member, said first engagement member comprises first and second engagement portions provided on said outer and inner shaft members.

25 69. The chair as claimed in claim 66 wherein
(a) said shaft member comprises first and second longitudinally extending members each having first and second ends and defining a longitudinally extending axis;

30 (b) said first end of said first longitudinally extending member adapted to receive a button, said first engagement member comprises a first engagement portion positioned on said second end of said first longitudinally extending member, said first longitudinally extending member having an opening extending from said second end towards

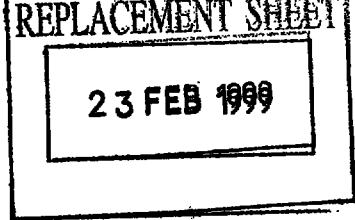

said first end, said first engagement portion having a first engagement surface;

5 (c) said second longitudinally extending member being slidably positioned within said first longitudinally extending member with said first end of said second longitudinally extending member positioned within said first longitudinally extending member, said first engagement member further comprises a second engagement portion positioned on said second end of said second longitudinally extending member and having a second engagement surface drivingly
10 engaged by said first engagement surface as said button travels between said first and second positions to rotate said second longitudinally extending member at least part way around said axis;

(d) said housing having first and second ends and a longitudinal opening extending therethrough for receiving said first and second
15 longitudinally extending members, said opening having an inner surface and said second engagement member is provided on said inner surface whereby movement of said button from said first position to said second position causes said first engagement member to undergo a rotational movement to alternately secure said button in said first
20 and second positions.

70. The chair as claimed in claim 68 wherein

(a) said second engagement member comprises a plurality of first and second longitudinally extending channels extending from
25 said first end towards said second end and spaced periodically around said inner surface, each of said second channels positioned between a pair of first channels, said second channels being further recessed into said inner surface than said first channels;

(b) said first engagement portion having a plurality of first
30 protrusions dimensioned to be received in said first channels and positioned to be received in said first and second channels;



23 FEB 1999

(c) said second engagement portion having a plurality of second protrusions dimensioned to be received in said first channels and positioned to be received in said first channels; and,

5 (d) a cam member positioned on said inner surface adjacent said first end to engage said first and second protrusions and align said first protrusions with said first and second channels and said second protrusions and with said first channels.

10 71. The chair as claimed in claim 62 wherein said actuator comprises a lever which acts on said coupling member, said lever being movable between a first position and a second position for actuation of said coupling member.

15 72. The chair as claimed in claim 69 wherein said mechanical coupling member comprises a pivotally mounted arm member, said arm member and said lever having a moment arms of sufficient length to permit said actuator to move from said first position to said second position by a force applied through a finger of the user when said user is seated in the chair.

20 73. The chair as claimed in claim 70 wherein said coupling means further comprises a flexible cable.

25 74. The chair as claimed in claim 62 wherein said retaining member comprises a cylinder.

75. The chair as claimed in claim 62 wherein said retaining member comprises a cylinder which includes a non-compressible fluid.

30 76. The chair as claimed in claim 73 wherein said cylinder includes a telescopically extendable section, a stationary section and a valve,



said retaining member further comprising a valve release member which acts on said valve and which is movable between a closed position in which said telescopically extendable section is fixed in position relative to said stationary section and an open position in which said telescopically extendable section is movable relative to said stationary section, said actuator button operatively connected to said valve release member whereby when said actuator button is in said first position, said valve release member is in said closed position, and when said actuator button is in said second position, said valve release member is in said open position.


77. The seating unit as claimed in claim 62 wherein said seat member is pivotally mounted on said support member.

78. The seating unit as claimed in claim 77 wherein said retaining member comprises a cylinder having a telescopically extendable section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally mounted on said support member and the other of said telescopically extendable section and said stationary section is pivotally mounted on said seat member.

79. The seating unit as claimed in claim 78 wherein said cylinder extends upwardly from said support member to said seat member.

80. The seating unit as claimed in claim 62 further comprising a back member, said back member pivotally mounted with respect to said seat member for movement of said back member between an upright position and a reclined position.

81. The seating unit as claimed in claim 80 wherein said retaining member comprises a cylinder having a telescopically extendable

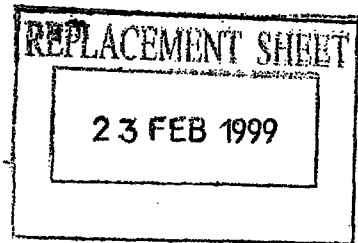

section and a stationary section, one of said telescopically extendable section and said stationary section is pivotally connected to said back member.


5 82. The seating unit as claimed in claim 81 wherein said back member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said back member.

10 83. The seating unit as claimed in claim 81 wherein said back member is fixedly mounted on an attachment member, said attachment member is pivotally mounted on said seat member and said one of said telescopically extendable section and said stationary section is pivotally mounted on said attachment member.

15 84. A movable chair having a base adapted for movement across the surface on which the chair is situated, a seat member, an arm, a support member extending between the base and the seat member, the chair having a movable portion and a stationary portion, the chair
20 comprising:

(a) a mechanical actuator comprising a lever extending in a plane and an actuator element, said actuator element operatively engaging the lever to apply a force to the lever at an angle to the plane of the lever to move the lever between a first
25 position and a second position by a force applied by the hand of a user while seated in the chair, said actuator including a locking member for alternately maintaining said lever in said first and second positions;

(b) a retaining member for retaining said movable portion of the
30 chair in either of at least two positions providing different configurations of the chair, said retaining member being



releasable to permit said moveable portion to move between said at least two positions; and,

(c) a mechanical coupling member having a first end connected to said lever and a second end operatively connected to said retaining member

whereby, when said lever is moved from said first position to said second position, said retaining member is actuated so that the moveable portion of said chair may be adjusted relative to the stationary portion, and when said lever is moved from said second position to said first position, the moveable portion of the chair is fixed relative to the stationary portion.


85. The chair as claimed in claim 84 wherein said lever has a first arm operatively connected to the coupling member and a second arm operatively engaged by the actuator element.

86. The chair as claimed in claim 85 wherein said lever is pivotally mounted to a housing at a location between said first and second arms and said actuator element is a separate member to said lever.

87. The chair as claimed in claim 86 wherein said locking member comprises an engagement member associated with said actuator for alternately maintaining said actuator in said first and second positions.

88. The chair as claimed in claim 87 wherein said actuator element travels inwardly in the direction of the chair as the lever travels from said first position to said second position.

89. The chair as claimed in claim 84 wherein said actuator element comprises a button which is mounted in a housing and comprises a longitudinally extending shaft member and said locking member

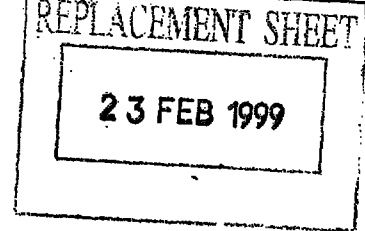

55

comprises a first engagement member positioned on said shaft and a second engagement member provided in said housing for engaging said first engagement member.

5 90. The chair as claimed in claim 89 wherein said housing has a
longitudinally extending opening having an inner surface and said
second engagement member is provided on said inner surface
whereby movement of said button from said first position to said
10 rotational movement to alternately secure said button in said first and
second positions.

91. The chair as claimed in claim 84 wherein said coupling means
further comprises a flexible cable.

15

92. The chair as claimed in claim 84 wherein said chair further
comprises an arm member and said actuator is provided on said arm
member.

20

9802038-1

9802038-1

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A47C 1/024, 3/30		A1	(11) International Publication Number: WO 97/07715
			(43) International Publication Date: 6 March 1997 (06.03.97)
(21) International Application Number: PCT/CA96/00566		(74) Agent: BERESKIN & PARR ; 40th floor, 40 King Street West, Toronto, Ontario M5H 3Y2 (CA).	
(22) International Filing Date: 22 August 1996 (22.08.96)			
(30) Priority Data:		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
08/518,344 23 August 1995 (23.08.95) US 08/557,260 14 November 1995 (14.11.95) US 60/006,753 15 November 1995 (15.11.95) US			
(60) Parent Applications or Grants		Published	
(63) Related by Continuation		With international search report.	
US 08/518,344 (CIP) Filed on 23 August 1995 (23.08.95) US 08/557,260 (CIP) Filed on 14 November 1995 (14.11.95)		With amended claims.	
(71) Applicant (for all designated States except US): GLOBAL UPHOLSTERY COMPANY [CA/CA] ; 580 Supertest Road, Downsview, Ontario M3J 2M7 (CA).			
(72) Inventor; and			
(75) Inventor/Applicant (for US only): TEDESCO, Romeo [CA/CA] ; 111 Verobeach Boulevard, Weston, Ontario M9M 1P9 (CA).			

(54) Title: **CONTROL MECHANISM FOR A CHAIR**

(57) Abstract

A seating unit (110) comprises a support member (118); a seat member (112) pivotally mounted on the support member (118); an arm rest member (120) having an actuating button (230, 334) positioned in the arm rest member (120), the button (230, 334) being movable between a first position and a second position; a fluid pressure cylinder (172, 282) having actuating means (200, 310) and operatively connected to the seat member (112) for adjustment of the inclination thereof; and, a flexible cable (214, 322) having a first end connected to the button (230, 334) and a second end operatively connected to the actuating member (200, 310). When the button (230, 334) is moved from the first position to the second position, the actuation member (200, 310) is actuated so that the inclination of back member (114) or the seat member (112) may be adjusted and when the button (230, 334) is moved from the second position to the first position, the inclination of the back member (114) or the seat member (112) is fixed.

