

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/094787 A1

(51) International Patent Classification⁷: **F01C 1/067**

(21) International Application Number:
PCT/IN2003/000167

(22) International Filing Date: 22 April 2003 (22.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: **KAMATH, Das, Ajee** [IN/IN]; A-601, Dheraj
Gaurav Heights Building No. 2, A-Wing, 6th Floor, New
Link Road, Adarsh Nagar, Andheri (West), Mumbai 400
053, Maharashtra (IN).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims and statement

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS ADAPTED TO PERFORM AS COMPRESSOR, MOTOR, PUMP AND INTERNAL COMBUSTION ENGINE

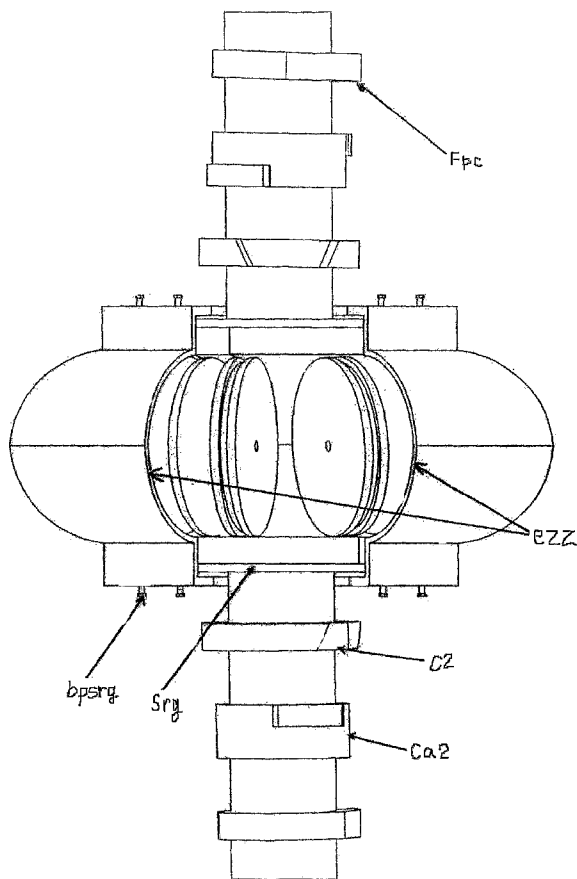

(57) Abstract: A rotary apparatus adapted to perform as, compressor, pump, motor or an internal combustion engine; said apparatus comprising of two vanes, two hollow cylindrical sleeves, hollow cylindrical liner, cams and associated linkages, couplings, shaft, clutch and braking/locking arrangement; said vanes are fitted on to the curved surface of the sleeves, one vane on each sleeve, such that the vanes are radial to sleeve's curved surface and at one of the ends of each sleeve so that the vane's surface protrudes out of the sleeve's end; said sleeves placed such that their ends, fitted with vanes are placed adjacent, with the vanes angularly displaced; said vanes are placed inside a liner; said liner's inner surface is contoured along the path traced by vane edge while rotating about the said axis; said inner surface allows rotation of the vanes about the said axis; said vanes divide the said enclosure formed inside the liner into two sealed chambers; enclosure; said two sleeves, are coupled and uncoupled with a shaft by means of coupling arrangement actuated by cams or other timing devices; said cams or timing devices are dependent on sleeve position; said cams or timing devices actuate said braking/locking arrangements such that each vane is held at a predetermined position alternately, and the vanes are free to rotate through an defined angle alternately; said cams or timing devices allow both vanes to rotate simultaneously through an predefined angle; said cams or timing devices defines the angle by which the vanes are separated, rotated simultaneously or independently.

WO 2004/094787 A1