



(43) International Publication Date
15 August 2013 (15.08.2013)

(51) International Patent Classification:
E04B 2/74 (2006.01)

(21) International Application Number:
PCT/GB2013/050286

(22) International Filing Date:
7 February 2013 (07.02.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1202201.8 8 February 2012 (08.02.2012) GB
1216341.6 12 September 2012 (12.09.2012) GB

(72) Inventor; and

(71) Applicant : **PEGRUM, Michael Barrie** [GB/GB]; PO
Box 600, Chiddingfold, Surrey GU8 4WD (GB).

(74) Agents: **BRYERS LLP** et al.; 7 Gay Street, Bath, Bath
and North, East Somerset BA1 2PH (GB).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

(54) Title: IMPROVEMENTS IN OR RELATING TO PARTITION SYSTEMS

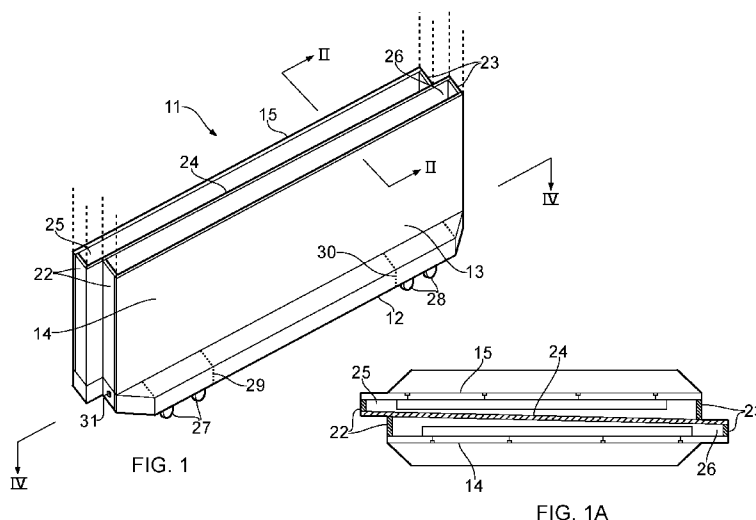

(57) Abstract: A panel structure for a demountable partition system usable for dividing a room or for forming rooms and/or corridors or other structures, the panel structure having two opposite major faces and in use being positioned in a generally upright orientation with other such panel structures of the system, in which there are provided one or more rolling elements movable using a gearbox mechanism between an extended, ground- contacting position, and a retracted position within the panel structure, wherein the rolling elements and the gearbox mechanism are disposed in relation to the panel structure to preserve an operating characteristic of the panel structure.