



(51) International Patent Classification:

F21V 17/00 (2006.01) F21V 31/00 (2006.01)
F21K 99/00 (2010.01) F21Y 101/02 (2006.01)
F21Y 111/00 (2006.01)

(21) International Application Number:

PCT/GB2013/052876

(22) International Filing Date:

4 November 2013 (04.11.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1219792.7 2 November 2012 (02.11.2012) GB
1223391.2 24 December 2012 (24.12.2012) GB

(71) Applicant: **TECNA DISPLAY LIMITED** [GB/GB]; Unit
11R Silvermere Drive, Stonehill Business Park, London
N18 3QH (GB).

(72) Inventor: **EVITT, Jonathan**; 21 Byron Road, Ealing
Common, London W5 3LL (GB).

(74) Agent: **HARRISON GODDARD FOOTE LLP**; Docu-
ment Handling - HGF (Birmingham), Belgave Hall, Bel-
grave Street, Leeds, Yorkshire LS2 8DD (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: LIGHTING DEVICE

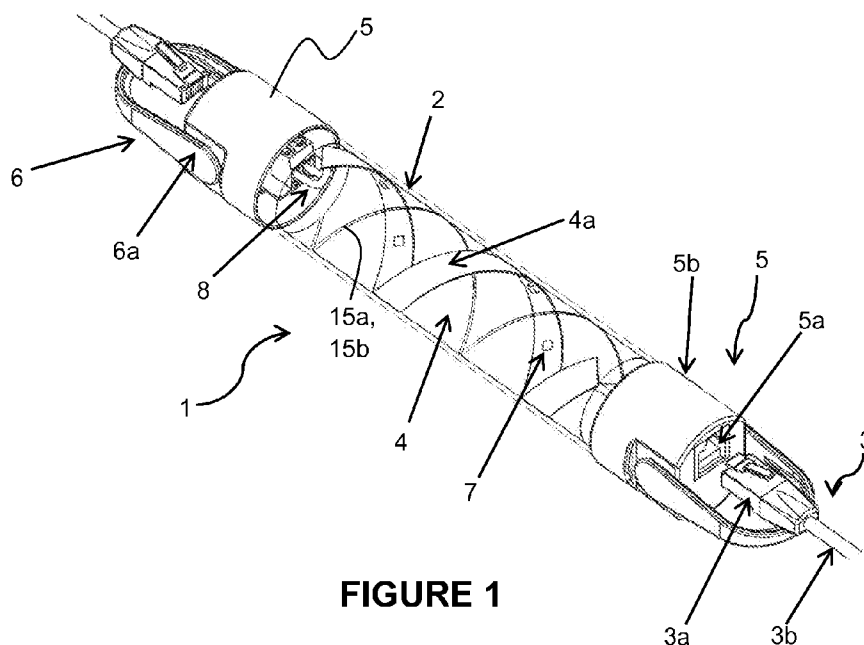


FIGURE 1

(57) Abstract: A lighting device (1) that includes a light transmissive tube (2), a support (4) to which a series of light emitting elements (7) are mounted and a connector (5) for connecting the light emitting elements to a power source. The support (4) is formed of a planar resilient material twisted or wound into a spiral or helix and received within and constrained by an inner circumferential surface of the tube (2) such that it is mounted directly to and/or in interference fit with the tube (2).



Published:

— *with international search report (Art. 21(3))*